



# 2014 PRODUCT GUIDE

MORE THAN 3,100 OF OUR MOST POPULAR PRODUCTS



**FREE** UPS GROUND shipping on orders of \$50 or more\*

ELECTRICAL



JANITORIAL



MATERIAL HANDLING



SAFETY



TOOLS



FANS & HVAC



PLUMBING



MORE THAN 400,000  
UNIQUE ITEMS ONLINE



[www.zoro.com](http://www.zoro.com)



# OUR PROMISE TO YOU...



## HUGE SELECTION OF PRODUCTS

*We offer 400,000+ products that help keep your business and home safe, clean and working in perfect order.*



## GREAT PRICES ON EVERYTHING

*Every customer pays the same low price for an item—whether you buy one or one thousand.*



## EASY ORDERING & QUICK DELIVERY

*Most orders are processed and ship the same day—expedited shipping is available.*



## TERRIFIC CUSTOMER SERVICE

*Our dedicated team works their tails off to make sure you have the best experience possible.*



### ORDER ANYTIME... MOST ORDERS SHIP THE SAME DAY!

customer service hours are monday thru friday 7am to 7pm (cst) · se habla español

CLICK [www.zoro.com](http://www.zoro.com) CALL 855.289.9676 FAX 855.329.9676

WE ACCEPT & (PayPal is available for online orders only)



## FREE

### UPS GROUND SHIPPING on orders of \$50+

For more details visit [zorotools.com/shipping](http://zorotools.com/shipping)



### STAY IN THE KNOW...

visit [zorotools.com/email](http://zorotools.com/email) and sign up for z-mails to receive emails, *plus* get \$5 off your order of \$25 or more



### WE'RE SOCIAL... FOLLOW US!

check out our social pages for exclusive promotions, special news & events, Zoro the Fox's antics and much more...



[facebook.com/zorotools](https://facebook.com/zorotools)



[linkedin.com/company/zoro-tools](https://linkedin.com/company/zoro-tools)



[plus.to/zorotools](https://plus.to/zorotools)



[twitter.com/zoro\\_tools](https://twitter.com/zoro_tools)




[youtube.com/zorotools](https://youtube.com/zorotools)



[pinterest.com/zorotools](https://pinterest.com/zorotools)





## SAFETY 4

- 4 · gloves, eyewear, ear protection, masks & clothing
- 14 · fall protection, facility & traffic safety equipment
- 20 · padlocks, lockout/tagout & security equipment
- 22 · signs & labels

## PLUMBING 24

- 24 · pipe, valves & fittings
- 36 · toilets, sinks, faucets & plumbing supplies

## ELECTRICAL 40

- 42 · electrical supplies & generators
- 52 · lighting, flashlights & batteries

## TEST INSTRUMENTS & GAUGES 56

## FANS & HVAC 60

## JANITORIAL & MAINTENANCE 70

- 70 · janitorial & cleaning supplies
- 78 · paint, coatings & supplies
- 80 · grounds maintenance & outdoor equipment

## MATERIAL HANDLING 82

- 82 · storage, shelving, ladders & lifts
- 90 · drum & dock equipment
- 92 · carts, trucks & casters
- 94 · pulling, lifting, lowering, conveying

## TOOLS 96

- 96 · hand tools
- 106 · power tools & accessories
- 108 · cutting, holemaking & shaping tools

## PNEUMATICS 110

## HYDRAULICS 116

## MACHINE TOOLS & ACCESSORIES 118

- 118 · knobs, handles, workholding & machine tool acc.
- 120 · bearings, v-belts & power transmission equip.

## FLUIDS & LUBRICANTS 122

## AUTO & TRUCK 124

## WELDING & SOLDERING 128

## ABRASIVES & POLISHERS 130

## FASTENERS 132

## HINGES & HARDWARE 136

## RAW MATERIALS 138

## TAPES & ADHESIVES 140

- 140 · tapes (electrical, duct, painters)
- 142 · adhesives & sealants

## SHIPPING & OFFICE SUPPLIES 144

- 144 · office & breakroom furniture & supplies
- 146 · shipping & packing supplies

# SAFETY



NEED GLOVES, GLASSES, CONES OR SIGNS?  
ZORO HAS EVERYTHING YOU NEED **AND** MORE!

Safety never happens by accident. Zoro has over **43,000** safety products available online to help keep your business, workshop and home safe and secure. From work gloves to eye protection, safety harnesses and eyewash stations, even facility signs and safes—what could be safer than a safe? Not much, that's what.



RESPIRATORS  
// page 9



WORK GLOVES  
// page 5, 6, 7, 9



SAFES  
// page 20



HARD HATS  
// page 8



PROTECTIVE EYEWEAR  
// page 7




FIRE SAFETY  
// page 17, 18, 23



FLAGGING TAPES  
// page 14

POPULAR BRANDS


more BRANDS online



LOCKS  
// page 21



SAFETY CONES  
// page 15, 17



SIGNS  
// page 22, 23



**VALUE BRAND String Knit Gloves**

Polyester/cotton gloves allow comfort while reducing hand fatigue. Seamless knit stretches for fit and breathability. These ambidextrous gloves are perfect for general maintenance, material handling, assembly, shipping and receiving.

- |                         |                         |
|-------------------------|-------------------------|
| G0048982 <i>x-small</i> | G0048973 <i>small</i>   |
| G0048964 <i>large</i>   | G0048955 <i>x-large</i> |
| pair <b>\$0.25</b>      |                         |



**VALUE BRAND Coated String Knit Gloves**

Gloves are coated on both sides and are fully reversible for extended wear. Polyester/cotton gloves feature a dotted PVC coating providing abrasion resistance, tactility and dexterity combined with wet and dry grip.

- |                          |                         |
|--------------------------|-------------------------|
| G0057477 <i>x-small</i>  | G0057495 <i>small</i>   |
| G0057486 <i>large</i>    | G0057452 <i>x-large</i> |
| G0057461 <i>2x-large</i> |                         |
| pair <b>\$0.44</b>       |                         |



**VALUE BRAND Lint-Free String Knit Gloves**

Seamless knit stretches for fit and breathability. Low-lint, standard-weight polyester is ideal for use in the electronics industry, painting and delicate parts handling.

- |                         |
|-------------------------|
| G0049043 <i>small</i>   |
| G0049052 <i>large</i>   |
| G0049034 <i>x-large</i> |
| pair <b>\$0.52</b>      |



**VALUE BRAND Leather Palm Gloves**

Split cowhide palm gloves feature a striped cotton back.

**Knit Wrist**  
Seamless, stretchable rib knit cuff provides a comfortable, secure fit and fits under clothing sleeves to keep cold air out.

- |                         |
|-------------------------|
| G0054004 <i>small</i>   |
| G0053995 <i>large</i>   |
| G0053986 <i>x-large</i> |
| pair <b>\$1.39</b>      |

**Gauntlet Cuff**  
Extended cuff provides greater protection of wrist and forearm.

- |                         |
|-------------------------|
| G0054126 <i>small</i>   |
| G0054135 <i>large</i>   |
| G0054117 <i>x-large</i> |
| pair <b>\$1.99</b>      |



**GLOVES: THEY'RE LIKE COATS... FOR YOUR HANDS.**

**MECHANIX WEAR FastFit Gloves**

Professionals and enthusiasts agree—the FastFit glove is a tool box must-have. Form-fitting stretch panels between your fingers provide a snug fit and the elastic cuff offers easy on and off flexibility between tasks. Durable synthetic leather is anatomically cut around your palm for better wear when handling tools. Your hands will stay cool, dry and comfortable with moisture-wicking TrekDry material covering your wrist, thumb and fingers.

- |                          |                          |                          |
|--------------------------|--------------------------|--------------------------|
| <b>Black</b>             | <b>Blue</b>              | <b>Red</b>               |
| G4387722 <i>small</i>    | G4387677 <i>small</i>    | G4387625 <i>small</i>    |
| G4387731 <i>medium</i>   | G4387686 <i>medium</i>   | G4387634 <i>medium</i>   |
| G4387747 <i>large</i>    | G4387695 <i>large</i>    | G4387643 <i>large</i>    |
| G4387756 <i>x-large</i>  | G4387704 <i>x-large</i>  | G4387652 <i>x-large</i>  |
| G4387765 <i>2x-large</i> | G4387713 <i>2x-large</i> | G4387661 <i>2x-large</i> |
| pair <b>\$10.79</b>      | pair <b>\$10.79</b>      | pair <b>\$10.79</b>      |



**VALUE BRAND Leather Driver's Gloves**

Split cowhide gloves feature a gunn-cut design, shirred wrist and straight thumb.

- |                          |
|--------------------------|
| G0054923 <i>small</i>    |
| G0054932 <i>medium</i>   |
| G0054941 <i>large</i>    |
| G0054957 <i>x-large</i>  |
| G0054914 <i>2x-large</i> |
| pair <b>\$2.59</b>       |



**VALUE BRAND Leather Driver's Gloves**

Pigskin leather is ideal for moist environments. Gunn-cut design with a keystone thumb, thumb shield and shirred wrist.

- |                          |
|--------------------------|
| G0055124 <i>x-small</i>  |
| G0055072 <i>small</i>    |
| G0055106 <i>medium</i>   |
| G0055115 <i>large</i>    |
| G0055081 <i>x-large</i>  |
| G0055097 <i>2x-large</i> |
| pair <b>\$5.99</b>       |



**VALUE BRAND Leather Driver's Gloves**

Cowhide leather provides excellent abrasion resistance, breathability and thermal protection. Gunn-cut design with a straight thumb and shirred elastic wrist.

- |                          |                          |
|--------------------------|--------------------------|
| <b>Economy Cowhide</b>   | <b>Grain Cowhide</b>     |
| G0055063 <i>x-small</i>  | G0055194 <i>small</i>    |
| G0055054 <i>small</i>    | G0055212 <i>medium</i>   |
| G0055045 <i>medium</i>   | G0055176 <i>large</i>    |
| G0055036 <i>large</i>    | G0055203 <i>x-large</i>  |
| G0055027 <i>x-large</i>  | G0055185 <i>2x-large</i> |
| G0055011 <i>2x-large</i> | pair <b>\$6.32</b>       |
| pair <b>\$5.99</b>       |                          |



**VALUE BRAND Canvas Gloves**

These 8-oz cotton canvas gloves feature a knit wrist, clute cut and straight thumb.

- |                       |
|-----------------------|
| G0048291 <i>small</i> |
| G0048307 <i>large</i> |
| pair <b>\$0.51</b>    |



**eZ TIPS**  
technical resources

**Glove Sizing Chart**

Wrap a tape measure around your palm to determine the circumference of your hand in inches. Refer to the sizing chart to determine your appropriate glove size.

palm size	glove size
6" to 7"	x-small
7" to 8"	small
8" to 9"	medium
9" to 10"	large
10" to 11"	x-large
11" to 12"	2x-large



## PALM-COATED GLOVES

Palm-coated gloves offer dexterity, grip and comfort while protecting against snags, punctures and abrasions. Appropriate for use in wet areas where grip and dexterity are critical. Great for automotive and light assembly, construction, maintenance and shipping & receiving.

**VALUE BRAND Palm-Coated Gloves**

Constructed with a natural rubber/latex material with elasticity that offers resistance to cuts, punctures and slashes. Secure grip. Polyester/cotton lining with rolled cuff. Crinkled coating.

G0050967 *small*  
G0050976 *medium*  
G0050985 *large*  
G0050994 *x-large*  
G0050951 *2x-large*  
pair **\$1.11**


**ANSELL SensiLite Palm-Coated Gloves**

Comfort and protection for small parts assembly. Gloves are coated with a textured polyurethane, are lined in nylon and have an elastic wrist.

■ ANSI/ISEA ABRASION LEVEL 3

G0050531 *x-small*  
G0050547 *small*  
G0050556 *medium*  
G0050565 *large*  
G0050574 *x-large*  
G0050583 *2x-large*  
pair **\$1.29**


**SHOWA BEST Atlas Fit Palm-Coated Gloves**

This glove provides durable protection without sacrificing comfort. The natural rubber latex coating provides secure grip. Cotton/polyester lining with knit wrist. ■ ANSI/ISEA ABRASION LEVEL 3

G0051335 *small*  
G0051326 *medium*  
G0051317 *large*  
G0051344 *x-large*  
pair **\$2.00**


**ANSELL HyFlex 11-600 Palm-Coated Gloves**

Polyurethane palm coating provides maximum tactile sensitivity and abrasion resistance. Nylon liner provides barehand dexterity. Ideal for precision applications and small parts handling. Knit wrist.

■ ANSI/ISEA ABRASION LEVEL 2, CUT LEVEL 1

G0050696 *x-small*  
G0050705 *small*  
G0050714 *medium*  
G0050723 *large*  
G0050732 *x-large*  
G0050687 *2x-large*  
pair **\$2.19**


**ANSELL HyFlex 11-800 Palm-Coated Gloves**

Great for assembling, packing and inspecting. Foam nitrile coating offers sure grip and resists abrasions. Nylon lining with knit wrist. ■ ANSI/ISEA ABRASION LEVEL 3, CUT LEVEL 1

G0053611 *x-small*  
G0053627 *small*  
G0053636 *medium*  
G0053645 *large*  
G0053654 *x-large*  
G0053602 *2x-large*  
pair **\$3.19**


**ANSELL HyFlex 11-624 Cut-Resistant Gloves**

Polyurethane coating provides a sure grip and good resistance to tears and punctures that might occur when handling small parts and metal components. High-performance polyethylene/dyneema lining with knit cuff.

■ ANSI/ISEA ABRASION LEVEL 5, CUT LEVEL 2, PUNCTURE LEVEL 4

G0064276 *x-small*  
G0064285 *small*  
G0064294 *medium*  
G0064303 *large*  
G0064312 *x-large*  
G0064321 *2x-large*  
pair **\$7.39**


**VALUE BRAND Cut-Resistant Gloves**

Use alone or as a liner for added protection. Lightweight uncoated Kevlar lined gloves feature a knit cuff. ■ ANSI/ISEA ABRASION LEVEL 1, CUT LEVEL 2

G0065642 *small*  
G0065633 *large*  
pair **\$2.13**


**ANSELL Heavyweight Cut-Resistant Gloves**

Protect hands from sharp metal, ceramic, glass and other edges. PVC dots make these the ideal choice when enhanced grip is desired. Reversible design allows glove to be worn on either hand. Dyneema lining with knit cuff. ■ ANSI/ISEA ABRASION LEVEL 3, CUT LEVEL 4

G0066035 *small*  
G0066044 *medium*  
G0066053 *large*  
G0066062 *x-large*  
pair **\$7.89**


**VALUE BRAND Mechanic's Gloves**

Gloves protect workers' hands from impact, nicks and abrasions without sacrificing dexterity or grip for handling tools and parts. Synthetic leather palm with neoprene back. Hook-and-loop wrist strap. Machine washable.

G0022355 *small*  
G0022346 *medium*  
G0022337 *large*  
G0022321 *x-large*  
G0022312 *2x-large*  
pair **\$8.99**


**MECHANIX WEAR The Original Mechanic's Gloves**

The Original provides the perfect blend of flexibility and protection. Durable synthetic leather palm, form-fitting stretch Spandex top and a flexible Thermal Plastic Rubber (TPR) wrist closure allow for a second-skin fit. Seamless single layer palm for maximum control. Machine washable.

► MORE COLORS ONLINE

**Black/Black**  
G0022662 *small*  
G0022671 *medium*  
G0022687 *large*  
G0022696 *x-large*  
G0022705 *2x-large*  
pair **\$14.89**





## 100% NITRILE GLOVES

Nitrile gloves offer superior resistance to punctures, abrasion and chemicals. They contain no natural rubber proteins known to cause allergic reactions. Suitable for applications where gloves are frequently replaced, like the food and pharmaceutical industries.

**SHOWA BEST 7500PF Nitrile Gloves**

These 4 mil thick powder-free gloves are a perfect solution for those who require the barrier protection found in disposable nitrile, but who operate on a disposable Latex budget. Industrial grade. Pebbled finish. Powder free. 9½" length.

G0058694 *x-small*  
G0058642 *small*  
G0058651 *medium*  
G0058667 *large*  
G0058676 *x-large*  
G0058685 *2x-large*  
100-count **\$6.94**

**VALUE BRAND Nitrile Gloves**

Thin gauge 4 mil thickness provides superior flexibility, sensitivity and dexterity. Food grade. Smooth finish. Powdered. 9½" length.

G0058256 *small*  
G0058247 *medium*  
G0058231 *large*  
G0058265 *x-large*  
100-count **\$7.59**

**ANSELL TNT Blue Nitrile Gloves**

Durable, 5 mil thick nitrile gloves feature textured fingers that provide an exceptional grip. Antistatic properties eliminate static discharge. Food grade. Powder free. 9½" length.

G0058782 *small*  
G0058791 *medium*  
G0058807 *large*  
G0058816 *x-large*  
100-count **\$7.99**

**CREWS Safety Eyewear**

This lightweight frameless option gives you a comfortable feel. Glasses feature a scratch-resistant polycarbonate lens and spatula temples. 99.9% UV protection.

■ ANSI STANDARDS  
G2329546 **\$0.81**

**NORTH BY HONEYWELL A700 Series Safety Eyewear**

Wraparound 9-base polycarbonate lens provides substantial coverage and a distortion-free 180° field of vision. The universal nose bridge combined with soft temple tip pads ensures a comfortable fit. A protective anti-scratch hardcoat maximizes the life of the eyewear. 99.9% UV protection. ■ ANSI, CSA STANDARDS

G2784695 **\$1.43**

**VALUE BRAND Safety Eyewear**

Clear polycarbonate lens features a scratch-resistant coating. Clear frosted wraparound frame. Bayonet temples with black nylon padding. 99.9% UV protection.

■ ANSI STANDARDS  
G2890246 **\$2.79**

**NORTH BY HONEYWELL V-Maxx Goggles**

These sporty-style goggles can be worn over prescription eyewear and with most half-mask respirators. Sleek wraparound styling for a 180° field of vision. Antifog polycarbonate lens. Direct venting.

G3353883 **\$4.44**

**VALUE BRAND Slip-On Sideshields**

Removable clear plastic sideshields affix to most plano-style protective eyewear and prescription spectacles. 99.9% UV protection.

■ ANSI STANDARDS  
G1972354 pair **\$2.39**

**3M Virtua Safety Eyewear**

Lightweight eyewear offers unisex style, protection and affordability for site visitors or single use protection. Designed for indoor or outdoor use, its wide profile provides necessary impact protection and an unobstructed view. Clear polycarbonate lens and frame. 99.9% UV protection. Universal size.

■ ANSI STANDARDS  
G1030836 **\$0.79**

**VALUE BRAND Ratchet Faceshield with Chin Guard**

Polycarbonate visors allow high clarity and are ideal for heavy-duty impact and heat-resistance applications. Locking arm system. 4-position adjustable visor stop. Polyurethane headband. 7" x 15½" visor is 0.04" thick. ■ ANSI STANDARDS

G0291846 **\$14.99**

**VALUE BRAND Ratchet Faceshield Assembly**

Use shields with PCTG visors for chemical splash protection. PCTG is lightweight with distortion-free optics and low haze. Dielectric protection. Spark deflector with wide range of adjustability. 8" x 16½" visor is 0.07" thick. ■ ANSI STANDARDS

G3223193 **\$14.12**

**BAUSCH & LOMB Sight Savers Pre-Moistened Lens Cleaning Tissues**

Tissues provide anti-static and anti-fog protection for moderate conditions. Excellent for safety and prescription eyeglasses, goggles, face shields, computer screens, automobile mirrors and more. Dispenser holds 100 individually packaged, 5" x 8" folded nonsilicone tissues.

G2911772 100-pack **\$8.65**







### MSA V-Gard Protective Caps

Polyethylene shell and self-adjusting crown straps provide comfortable, lightweight protection.

■ ANSI STANDARDS

#### Pinlock Suspension

G0004331 <i>blue</i>	G0004347 <i>green</i>
G0004356 <i>orange</i>	G0004365 <i>red</i>
G0004374 <i>white</i>	G0004383 <i>yellow</i>

**\$5.89**

#### 4-Point Ratchet Suspension

G0004435 <i>blue</i>	G0004453 <i>green</i>
G0004462 <i>orange</i>	G0004471 <i>red</i>
G0004487 <i>white</i>	G0004496 <i>yellow</i>

**\$8.79**



### MSA V-Gard Protective Hat

Hat features a polyethylene shell and self-adjusting crown straps provide comfortable, lightweight protection. 4-point ratchet suspension.

■ ANSI STANDARDS

G0009931 **\$11.99**

WE USUALLY DON'T RECOMMEND BEING A HARD-HEADED FAN...

BUT IN THIS CASE, WE DO!



### MSA Officially Licensed NFL V-Gard Protective Caps

Support your favorite NFL team and protect yourself. NFL V-Gard caps come equipped with the strap adjustable 1-touch suspension. Polyethylene construction with pinlock suspension and accessory slots. Fits hat size 6½ to 8.

■ ANSI STANDARDS ▶ MORE TEAMS ONLINE

G0010367 *Chicago Bears*  
G0010403 *Denver Broncos*  
G0010577 *Seattle Seahawks*  
each **\$21.29**



### 3M E-A-R UltraFit Corded Earplugs

Push-to-fit style with grip stems for easy and hygienic fit. Elastomeric polymer plugs are washable and reusable. Premolded, flanged design. 25 dB NRR. Packaged in a polybag.

■ ANSI, CSA STANDARDS  
G1840605 *earplugs only* **\$0.98**  
G1660461 *earplugs w/case* **\$1.29**



### HOWARD LEIGHT BY HONEYWELL Laser Lite Disposable Ear Plugs

Contoured polyurethane foam adjusts inside the ear canal for comfortable long-term wear. PVC cord. 32 dB NRR. Each pair is wrapped in a polybag.

■ ANSI, CSA STANDARDS  
G1802114 100-pair **\$16.99**



### HOWARD LEIGHT BY HONEYWELL MAX Disposable Ear Plugs

Bell shape is easy to insert and resists backing out of the ear canal. Soft foam plug. 33 dB NRR. Each pair is wrapped in a polybag and is meant for single use.

■ ANSI STANDARDS  
G1499224 100-pair **\$18.99**



### MSA HPE Cap-Mounted Earmuffs

Providing the highest-rated protection available for low-frequency environments, these earmuffs are designed specifically for very high noise levels and are ideal for airfields, power plants and other areas with intense noise. Super-soft ear cushions provide all-day comfort while ensuring full-time protection. Three wearing positions. 27 dB noise NRR.

■ ANSI STANDARDS

G0436721 **\$22.98**



### HOWARD LEIGHT BY HONEYWELL Viking Series Dielectric Ear Muffs

Padded headbands cushion the head and distribute pressure for comfort. Dielectric ear muffs are nonconductive for use in electrical environments. 3-position headband offers optimal comfort and fit. Provide consistent attenuation across all frequencies. Snap-in ear cushions are easy to replace.

■ ANSI STANDARDS  
G0259761 *blue (27/25/25 dB NRR)* **\$13.99**  
G2700171 *gray (29/27/27 dB NRR)* **\$16.99**



### TASCO Nextera Ear Muffs

Over-the-head style ear muffs offer a 30 dB noise reduction rating.

■ CSA STANDARDS  
G4095402 **\$17.59**

**3M 6000 Series Reusable Respirators**

6000 Series offers versatility for many environments and applications and helps provide respiratory protection against a wide variety of gases and vapors when used with approved cartridges and filters. ■ NIOSH, ANSI STANDARDS

**6900 Full Facepiece**

This full facepiece reusable respirator offers comfort and ease of use. Large lens for wide field of view. Lightweight, balanced design. Silicone face seal for greater comfort and durability.

G2068184 **\$110.05**

**6300 Half Facepiece**

This half facepiece reusable respirator offers reliable and convenient respiratory protection and is suitable for many situations.

G0952831 **\$9.48**

**6003 Filter Cartridge**

helps provide respiratory protection against certain organic vapors or acid gases.

G2800156 2-pack **\$9.37**

**HONEYWELL Nuisance Dust Masks**

Provide basic protection against non-toxic dust, pollen, mold and dander. Adjustable nose bridge clip offers a secure fit.

G2646752 50-pack **\$4.29**

**3M Classic Disposable N95 Particulate Respirators**

Designed to help provide comfortable, reliable worker respiratory protection against certain non-oil based particles. Electrostatically charged microfibers help make breathing easier and cooler. Featuring a welded strap attachment, cushioning nose foam and adjustable noseclip that helps provide a custom fit and secure seal. ■ NIOSH STANDARDS

G0660974 20-pack **\$12.05**

**VALUE BRAND Disposable N95 Particulate Respirators**

Economical, lightweight respirators feature an adjustable aluminum nose clip and dual elastic headstraps.

■ NIOSH STANDARDS

G1931797 20-pack **\$9.29**

**3M Disposable N95 Particulate Respirators**

Featuring the 3M Cool Flow Valve, these respirators help provide comfortable, reliable worker respiratory protection. Additional features include an adjustable M-nose clip, braided head bands and soft inner materials.

■ NIOSH STANDARDS

G2152001 10-pack **\$15.56**

**VALUE BRAND Polypropylene Protective Clothing**

Economical alternative for disposable clothing in less-demanding environments. Breathable, lightweight material with serged seams. Transparent white color. Lightweight protective clothing features a reliable barrier against dust and splash. Medium-weight clothing offers protection from dirty, nonhazardous conditions. Zipper closure.

**Disposable Collared Coveralls**  
Open wrists and ankles.

#	size	chest/ waist/ inseam
G0083081	S	23/33/28
G0083097	M	25/35/29
G0083106	L	27/37/30
G0083115	XL	28/39/31
G0083124	2X	30/41/32
G0083133	3X	31/43/33
G0083142	4X	33/45/34
G0083151	5X	35/47/35

25-pack **\$28.99**

**Disposable Hooded Coveralls**  
Elastic wrists, ankles and hood.

#	size	chest/ waist/ inseam
G0083255	M	25/35/29
G0083264	L	27/37/30
G0083273	XL	28/39/31
G0083282	2X	30/41/32
G0083291	3X	31/43/33
G0083307	4X	33/45/34
G0083316	5X	33/47/35

25-pack **\$31.29**



WHO SAID SAFETY  
CAN'T BE STYLISH?

**ANSELL Natural Latex Gloves**

Excellent resistance to acids and caustics. Limited resistance to alcohols and ketones. Not for use with organic solvents, oils, greases or fuels. Pattern embossing gives a secure grip. 12" length.

**FL-100**

The perfect combination of strength, sensitivity and moderate chemical protection. Flock lining. 17mil thickness.

G0024534 7  
G0024543 8  
G0024552 9  
G0024561 10  
pair **\$0.69**

**Canners & Handlers**

An ideal glove for safety and dexterity in the food processing industry. Unlined. 20mil thickness.

G0024613 7  
G0024622 8  
G0024631 9  
G0024647 10  
pair **\$0.99**

**DUPONT Tyvek Shoe Covers**

Tyvek fabric is comfortable and lightweight while providing puncture- and tear-resistant protection. Skid-resistant design features serged seams and prevents slipping. Universal size.

G0653597 200-pack **\$82.09**

**VALUE BRAND Disposable Hazmat Rubber Overboots**

Provide economical protection against acids, alcohol, salts, and ketones. Textured sole designed to offer extra traction on slippery surfaces. Chemical-resistant latex. 12" height.

G0005582 8 to 9  
G0005591 10 to 11  
G0005607 12 to 13  
pair **\$5.40**

**MIRA COOL Cooling Wrap**

Cotton wrap with water-activated cooling beads.

► MORE COLORS  
AVAILABLE ONLINE  
G2262434 **\$1.49**





**VALUE BRAND  
3-Piece Rainwear Suits**

Snap-front jacket with detachable hood. Bib overalls with snap-fly front. Suit resists water, acids, alcohols, alkalis, salts and soil. Elastic suspenders are included. Nylon liner. 0.35mm thickness.

G0076894 *small*  
G0076903 *medium*  
G0076912 *large*  
G0076921 *x-large*  
G0076937 *2x-large*  
G0076885 *3x-large*  
each **\$17.99**

**VALUE BRAND Snake Gaiters**

Lightweight design provides comfortable protection against snakes, briars and vines. Green plastic construction is 19" high in front and 15" high in back.

G4332894 pair **\$33.76**

**VALUE BRAND Chemical Spray Chaps**

Developed to protect when spraying or mixing chemicals. Chaps wrap completely around each leg without having to take off your shoe or boot. Secure with hook-and-loop fasteners for a comfortable fit. Adjustable top straps attach over a belt. Universal size. Made of gray butyl rubber.

G4279283 **\$64.73**

**VALUE BRAND  
Beard Restraints**

Beard covers prevent product contamination. Lightweight polypropylene is latex-free.

G2299351 100-pack **\$3.69**

**VALUE BRAND Economy  
Chemical-Resistant Apron**

This PVC apron provides superior flexibility and resistance to grease, fats, oils, acids, alkalis, alcohols and other chemicals. Abrasion and tear resistant. 35" x 50" green PVC construction with PVC grommets, attached neck strap and waist ties. 18 mil thickness.

G0694382 **\$3.99**

**VALUE BRAND Premium  
Chemical-Resistant Aprons**

Styrene-butadiene rubber (SBR) aprons are abrasion resistant and provide medium resistance to oil, mild solvents, acids, chemicals, caustics and alcohol. Ideal for chemical processing, food processing and pharmaceutical industries. 35" x 45" black nitrile exterior with a polyester interior.

G0817074 16 mil **\$11.16**  
G2277606 29 mil **\$17.54**

**CELLUCAP  
Bouffant Caps**

Hand-sewn style cap is 21" diameter. Made of latex-free nylon elastic.

G3919246 100-pack **\$4.69**

**TYVEK PROTECTIVE CLOTHING**

Tyvek fabric is comfortable and lightweight while providing puncture- and tear-resistant protection in wet or dry applications without restricting movement when stretching and bending. Offers an inherent barrier to particles down to 1 micron even after abrasion. Tyvek protective clothing is good for industrial workers in a variety of applications including general maintenance/operations, asbestos and lead abatement, mold remediation, and environmental cleanups. Meets OSHA requirements for asbestos and lead abatement.

**DUPONT  
Disposable Tyvek  
Collared Coveralls**

Zipper-front coveralls with comfort-fit design give wearers what they want—a greater range of movement, improved mobility, a more tailored fit, and better overall comfort. Open wrists and ankles with serged seams. 5.4 mil thickness.

■ USDA, FDA, OSHA  
STANDARDS

G0083876 *medium*  
G0083885 *large*  
G0083894 *x-large*  
6-pack **\$24.99**

**DUPONT  
Disposable Tyvek  
Collared Lab Coats**

Lab Coats feature 5-snap front with a storm flap, two pockets, serged seams and set-in sleeves that allow greater freedom of movement. Tear-resistant. Low-linting.

G0084192 *medium*  
G0084201 *large*  
G0084217 *x-large*  
G0085434 *2x-large*  
G0085443 *3x-large*  
8-pack **\$27.99**



**VALUE BRAND  
Spandex Back  
Support**

280 Denier spandex with stay and suspenders. Rubber track webbing with detachable 1½" knit elastic adjustable suspenders. Adjusts for 28" to 46" waist. 9" band width.

G2292516 **\$10.59**

**OK-1 Back Support**

Contoured back support with lumbar pad and double overlap closure. 9" width.

G4639241 *small*      G3850567 *medium*  
G3850551 *large*      G3850576 *x-large*  
G3850585 *2x-large*  
each **\$39.99**

**BULWARK Excel FR  
Flame-Resistant Coveralls**

100% cotton, one-piece construction with lay-flat collar and hemmed sleeves. Five-pocket design includes 2 set-in front pockets, 2 patch hip pockets and 1 chest pocket with bar tack and pencil stall. Coveralls feature 2-way Nomex taped brass breakaway zipper and neck snap closure concealed for safety. Side vent openings with snap closure provide access to pant pockets. Snap closure wrists and ankles.

■ ASTM, NFPA STANDARDS  
▶ MORE ONLINE

Royal Blue  
G0034054 *medium*  
G0034072 *large*  
G0034097 *x-large*  
G0034115 *2x-large*  
each **\$56.99**

**VALEO****Elbow Support**

Single-strap design is constructed with a nylon outer shell, terry-lined neoprene interior and hook-and-loop closure. Machine washable. Latex free.

G3825561 *small (fits 8½ to 10")*  
G3825552 *medium (fits 10 to 11")*  
G3825543 *large (fits 11 to 12")*  
G3825577 *x-large (fits 12 to 13½")*  
each **\$4.32**

**VALEO****Elbow Support**

Pullover style support is constructed of lightweight black neoprene.

G3854514 *small (fits 8½ to 10")*  
G3854505 *medium (fits 10 to 11")*  
G3854496 *large (fits 11 to 12")*  
G3854523 *x-large (fits 12 to 13½")*  
each **\$7.90**

**IMPACTO Neck Support System**

Prevents neck strain for people that must look up for extended periods. Polyurethane foam support limits range of motion in the upper back when head is tilted or extended. Features adjustable fire retardant straps, large capacity clips for attaching to waist and hook-and-loop closure. Universal size.

G1766913 **\$19.59**

**CLC Injected Gel Kneepads**

Injected gel and EVA foam for ultimate comfort. Molded interior padding for better fit and protection around the knee. Removable caps for multisurface use. Breathable neoprene lower strap with patented double closure system.

G2429551 pair **\$39.99**

**OK-1 Carpal Tunnel Wrist Support**

Breathable neoprene support features a 3" wide wraparound strap, hook-and-loop closure, terry-lined interior and flexible plastic insert.

**Left Wrist**

G3850174 *medium (fits 6½ to 7½")*  
G3850183 *large (fits 7½ to 8½")*

**Right Wrist**

G3850201 *medium (fits 6½ to 7½")*  
G3850192 *large (fits 7½ to 8½")*  
each **\$18.99**

**DECADE Wrist Support**

Circular knit, premium grade rayon/cotton blend elastic construction with no internal seams to chafe or rub. Serged edging for durability and long-life, even after repeated washings. Thumbhole maintains proper placement and support flips to fit right or left wrist. Reduces the pain of minor wrist sprains and strains.

G3962427 *small (fits 5½ to 6½")*  
G3952916 *medium (fits 6½ to 7½")*  
G3980785 *large (fits 7¾ to 8½")*  
G4057575 *x-large (fits over 8½")*  
each **\$8.99**

**VALUE BRAND Cut-Resistant Sleeves**

Sleeves protect against heat, cuts, slashes and abrasions. Ambidextrous sleeves can be worn on either arm. Thumbhole helps keep sleeve in place and provides additional wrist protection. Knitted arm guards provide comfort and stretch at bottom of the sleeve. Double-ply kevlar. ■ ANSI/ISEA ABRASION LEVEL 2, CUT LEVEL 3

G1127691 10" **\$2.12**  
G2299954 14" **\$2.89**  
G2520086 18" **\$3.49**  
G0449321 24" **\$4.59**





# COLD-CONDITION GEAR

WEATHER WHETHER YOU BELIEVE IN GLOBAL WARMING OR NOT, YOU CANNOT DENY WE'VE HAD SOME CRAZY WINTERS LATELY.

Have you ever tried to clear snow off your truck in sub-zero temperatures without gloves on? It's sub-optimal. With a good pair of cold-condition gloves, though—the world is yours to conquer. Shovel the walk with wanton disregard for the harsh winter! Work in your open air dock with aplomb! Carry metal and other cold materials with impunity! So get out there. It's not that cold after all.

## VALUE BRAND Fully-Coated Cold Condition Gloves

Smooth PVC coating provides abrasion resistance. Foam and jersey liner provides flexibility and dexterity. Safety cuff protects wrists and allows easy removal in emergency situations. Hi-visibility orange. Large size—10¾" length. G0331037 pair **\$5.14**




## ANSELL Winter Monkey Grip Gloves

Tough, smooth PVC vinyl coating protects hands from abrasions and stays soft when cold. Foam insulation keeps hands warm and dry. Curved fingers, wing thumb and soft jersey lining offer superior comfort. Ideal for food processing, food service, janitorial/sanitation and warehousing industries. Large size—10" length.

**Smooth Coating**  
G2503182 pair **\$9.83**

**Textured Coating**  
Textured vinyl surface provides excellent grip for easy, safe handling of wet or dry materials.

G1288515 pair **\$8.99**



## KINCO INTERNATIONAL Warm Grip Thermal Lined Gloves

Gloves feature a 100% acrylic knitted shell with thermal lining, knitwrist cuffs and crinkle finish latex coated palm and fingers. Ideal for camping, cold weather, construction/hardware, delivery, farm/ranch and gardening/landscaping applications.

G4502732 *small*  
G4502705 *medium*  
G4502723 *large*  
G4502714 *x-large*  
each **\$2.94**



## NORTH BY HONEYWELL

### Polar Insulated Leather Palm Gloves

High performance protection from the worst of winter weather. 3M Thinsulate liner provides protection from cold. Waterproof vinyl liner prevents hands from getting wet. Extended knitwrist provides additional weather protection. Gunn cut with wing thumb for comfort. Ideal for cold conditions work including construction, forestry, snow clearing, de-icing, highway work, baggage handling, maintenance work and cold storage.

G3968325 *medium*  
G4103154 *large*  
each **\$10.81**



## HEAT FACTORY Hand Warmers

The soft, light-weight pouch is about the size of a business card (2½" x 3½") and produces constant natural heat averaging 124°F for 10 hours. Warmers are odorless, non-toxic and air-activated. Ideal for gloves, pockets, Heat Factory headwear or any place where soothing heat is desired. Keep handy in luggage, car or gear bags for anytime use.

G3412421 3-pair **\$1.89**



## ERGODYNE ProFlex 818WP Thermal Waterproof Utility Gloves

Tough, sure gripping PVC palm and soft spandex cinch cuff. Durable synthetic leather with PVC reinforced palm and fingers. 3M Thinsulate insulation with Hipora breathable waterproof and windproof insert liner. Breathable spandex back with foam knuckle pad. Nylon/Spandex cuff with low-profile closure. Applications include cold storage, marine, winter work, construction, hunting/fishing, outdoor recreation, frozen metal/tongue decouplings.

G0030983 *small*  
G0031017 *large*  
G0031001 *2x-large*  
pair **\$35.92**

G0031026 *medium*  
G0030992 *x-large*



**VALUE BRAND Hard Hat Earbands**

Constructed of acrylic, these universal-sized earbands can be worn over most hard hats. Fits snugly around the ears and top of the head. Flame retardant.

G2236026 *blue*  
G3047642 *orange*  
each **\$2.16**

**VALUE BRAND Over-the-Head Winter Liner**


Cotton liner has an extended nape that covers the neck for added warmth. Universal size. Hook-and-loop adjustment.

G2992586 **\$8.79**

**MAXIT Z-Beanie Thermal Hat**

4-panel construction with comfortable, durable Flat-Lock stitching. Thin ProMAX IV fabric is warm and blocks wind. Easily stretches to cover the ears and remains stretchable in any weather. Fits comfortably under any style hat, hard hat or helmet without strap adjustment. Universal size.

G0218066 *black*  
G0218075 *brown*  
G0218084 *blue*  
each **\$11.99**

**CARHARTT Arctic-Quilt Lined Men's Sandstone Vest**

Constructed of tough 12-ounce, 100% sandstone cotton duck, this vest features a nylon lining quilted to arctic-weight polyester insulation. The front zipper is backed by a storm flap to help seal out the cold. Vest features an inside pocket with a hook-and-loop closure and two outside hand-warmer pockets. Back drop-tail adds coverage and warmth.

► **MORE SIZES AND COLORS ONLINE**

G0096494 *medium*  
G4638137 *x-large*  
each **\$59.99**

G0096485 *large*  
G0096503 *2x-large*

**CARHARTT Thermal Lined Men's Duck Active Jacket**

Built with 12-ounce, firm-hand, 100% ring-spun cotton duck with a 100% polyester thermal lining for on-the-job warmth. It includes a thermal-lined hood with drawcord closure and its rib-knit cuffs and waist work to keep out the cold. The jacket also includes two large hand-warmer pockets and two convenient inside pockets. Main seams are triple-stitched. ► **MORE SIZES ONLINE**

**Brown**  
G0087123 *small*  
G0087114 *medium*  
G0087105 *large*  
G0087132 *x-large*  
G0087096 *2x-large*  
each **\$69.99**

**Black**  
G0087071 *small*  
G0087062 *medium*  
G0087053 *large*  
G0087087 *x-large*  
G0087044 *2x-large*

**VALUE BRAND Insulated Coveralls**

1000 Denier Cordura nylon with quilt-lined polyester provides warmth and repels water. Coveralls feature two zippered chest pockets, two back pockets, two side pockets with slit openings and a left arm side pocket. 9-oz navy blue fabric. Elastic wrist bands. Zipper closure. 30½" inseam. Unisex.

G0096433 *medium*  
G0096451 *x-large*  
G0096476 *3x-large*  
each **\$139.99**

G0096442 *large*  
G0096467 *2x-large*

**VALUE BRAND Artic Bib Overalls**

1000 Denier Cordura nylon with quilt-lined polyester provides warmth and repels water. Bib overalls feature two zippered chest pockets and two back pockets. Zipper-fly front with 2-ply button, 4 side buttons, reinforced knees, and adjustable ankle and legs with 2-button opening. 12-oz black fabric.

G0096013 *medium*  
G0096031 *x-large*  
G0096056 *3x-large*  
each **\$154.99**

G0096022 *large*  
G0096047 *2x-large*

**NEOS Villager Waterproof Overboots**

Waterproof protection, up to 10", for all types of footwear. Ultra-light and compact, overboots are easy to store in luggage or vehicle for unexpected weather conditions—great over running shoes in the winter too! Adjustable strap closure with Duraflex quick-release buckle. High toebox accommodates light hiking boots. Snowshoe compatible heel. 160 Denier nylon upper. NEOS Perma sole. Resists cold temperatures.

G4946864 *x-small (mens 3½ to 5)*  
G4946855 *small (mens 5½ to 7)*  
G4946846 *medium (mens 7½ to 9)*  
G4950757 *large (mens 9½ to 11)*  
G4950766 *x-large (mens 11½ to 13)*  
each **\$46.99**



**PROTECTA Rebel Self-Retracting Lifeline**

Rugged, anodized aluminum housing with snap hook and carabiner. Polyester webbing enables a compact size. Speed sensing brake keeps forces to a minimum and reduces clearance requirements. Supports a capacity of 310 lb. 3,000 lb tensile strength. 11' length. ■ OSHA, ANSI STANDARDS  
G1493931 **\$119.09**



**MILLER BY HONEYWELL Manyard Shock-Absorbing Lanyards**

Specially woven shock-absorbing inner core smoothly expands to reduce fall arrest forces. Warning flag provides visual proof that a lanyard has been involved in a fall and must be removed from service. Heavy-duty tubular outer jacket serves as a back-up lanyard. Zinc-plated snap hooks have 3/4" gate opening. 6' single leg. ■ OSHA, ANSI STANDARDS  
G2792937 **\$61.99**



**PROTECTA PRO Construction Harness**

These harnesses provide greater comfort and added safety. Harnesses feature built-in impact indicator and label covers. Lanyard keeper holds excess line to prevent tripping and entanglements. Comfortable X-design with padding on shoulders, back and legs. Polyester webbing with forged stamped steel hardware. 420 lb capacity. 6,000 lb tensile strength. ■ OSHA, ANSI STANDARDS  
G1438972 *small*  
G1320821 *medium/large*  
G0277216 *x-large*  
each **\$87.02**



**MILLER BY HONEYWELL Contractor Non-Stretch Harness**

Specifically designed for use in construction with back and shoulder pads for additional comfort and a removable waist belt that accommodates tool pouches. Lightweight polyester webbing with subpelvic straps offers added support. Sliding back D-ring with D-ring pad provides added comfort. Pull-free lanyard ring allows user to attach lanyard when not in use. 400 lb capacity. 6,000 lb tensile strength. ■ OSHA, ANSI STANDARDS  
G2735722 **\$115.99**



**C.H. HANSON Barrier Tape**

Polyethylene tape features repeat wording that identifies hazards and outlines restricted areas. 2" tall black letters. 3" x 1000' roll. 2 mil thickness. ■ OSHA STANDARDS  
G1194207 *CAUTION* G2363934 *DANGER*  
each **\$4.49**



**CORTINA Reflective Pavement Marking Tape**

Peel-and-stick application can be removed or paved over—applicable to asphalt or concrete. Glass bead coated engineering grade paper with foil backing. 4" x 150' roll. 12 mil thickness. ■ MEETS FEDERAL AND STATE REQUIREMENTS WHERE APPLICABLE  
G1316655 *yellow*  
G3364225 *white*  
each **\$43.15**




**C.H. HANSON Dayglow Flagging Tape**

Bright PVC tape is designed for marking, identifying, color-coding and sealing out moisture. Best when used on clean surfaces. 1 3/16" x 150' roll. 4 mil thickness. ■ OSHA STANDARDS  
G0395105 *fluorescent lime*  
G0929923 *fluorescent orange*  
G2454873 *fluorescent pink*  
G3497891 *fluorescent red*  
G3199865 *fluorescent blue*  
each **\$0.73**



**SCOTCH Safety Stripe Tape**

High-performance vinyl tape with vivid colors and wear-resistant stripes is great for marking aisles, safety equipment, dangerous equipment parts and hazardous areas. 2" x 108' roll. 5.4 mil thickness. ■ OSHA STANDARDS  
G4309234 *white* **\$39.99**  
G4309225 *yellow* **\$46.99**



**T & S EQUIPMENT Lane Marker Tape Applicator**

Designed to apply tape as you walk. Solid steel construction with comfortable hand grips and durable rubber wheels allow for easy operation and maintenance. Features a soft rubber applicator head. Holds tape rolls with a 3" diameter core and widths between 1" and 4 1/2".  
G1187076 **\$102.58**



**BRADY Warning Chains**

Made of durable polyethylene, warning chains are a decorative alternative to metal chains. Recommended for indoor use only. 100' length.  
G1234091 **\$79.99**



**BRADY Warning Posts**

Made of colorful polyethylene, these posts are non-rusting and are a decorative alternative to metal posts. Posts are non-conductive so can be safely used in electrically hazardous areas. Hollow base can be filled with sand for more stable application. 41" height. 16" base. 4.6 lb.  
G3301584 *striped* 6-pack **\$349.99**  
G1559144 *yellow* each **\$39.89**








**OIL-DRI Universal Sorbent Socks**

Socks can be used to contain fluid leaks and prevent spills from spreading on the floor. They conform to fit snugly in tight spaces and around corners. One polypropylene sock will absorb up to 1 gallon of fluid. 3" diameter. 4' length.

G1637702 12-pack **\$28.74**



**BRADY SPC ABSORBENTS MRO Plus Heavy Pads**

Absorbs all industrial liquids—water-, petroleum- and chemical-based. Three-ply construction makes it stronger, more durable and reduces lint. Perforated design helps reduce waste—use only what you need. 15" x 19" .

G1424306 100-pack **\$52.49**



**OIL-DRI Oil-Only Pads**

Polypropylene pads repel water while absorbing petroleum based fluids. Ideal for automotive, marine, or industrial plant applications. Heavy weight absorbency. 36 gallons sorbed per pack. 15" x 19" .

G3303772 100-pack **\$59.89**



**STARDUST Quick Response II Universal Spill Kit**

For quick response to leaks, seepage, discharges and smaller spills of various liquids. Compact size makes it ideal to stow in commercial trucks or other vehicles. 6 gallons sorbed per kit.

G1375613 kit **\$35.99**

kit includes: 21" x 15" carrying bag, 16" x 18" pads (15), 3" x 4' socks (2), nitrile gloves (2), disposable bags (2), instruction sheet

**RUBBERMAID Over-the-Spill Pad Tablet**

Designed for quick spill containment, identification and absorption. Tablet backing is constructed of corrugated plastic and mounts on flat surface or affixes to floor signs. Single pad absorbs up to 12 oz of fluid. Tear-off pads.

G1378377 20-pack **\$16.11**



**RUBBERMAID Safety Cones**

Highly visible, bright yellow hazard protection system features a versatile top design that accommodates barricade belt, flashing light and lock-in sign holder. Four-sided shape allows for efficient stacking. Multi-lingual warning messages and ANSI symbols for effective communication for broad audiences. Molded-in slots for easy handling. 36" height.


■ OSHA STANDARDS

G2679031 safety first

G3088373 wet floor

G2464357 caution

each **\$25.99**

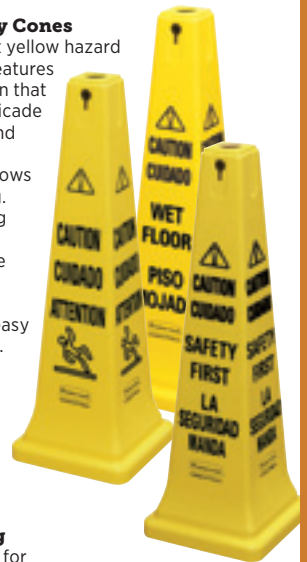

**RUBBERMAID Steel Weight Ring**

Stabilizes cone base for indoor/outdoor use. Fits 36" cones. Black coated steel construction. 10 lb.

G1074832 **\$19.59**



**RUBBERMAID Pop-Up Safety Cones**

Collapsible, automatically deployed cone comes in a wall-mounted storage tube for easy and compact storing. Durable construction. Multi-lingual "Caution" with wet floor symbol.

G3451655 20" **\$19.92**

G1645874 30" **\$23.99**



**VALUE BRAND Brass Stencil Set**

Characters interlock by sliding adjacent grooves together—easy to disassemble. Can be used with a variety of spray or brush-on paint to create clear and legible warnings, precautions and signs. Brass construction. 3" character height.

G2342252 92-piece set **\$98.49**  
set includes: letters, numbers and symbols

**WOOSTER PRODUCTS Flex-Tred Antislip Tape**

Cuts the risk of slips or falls. Pressure-sensitive adhesive-backed tape sticks to virtually any smooth, dry surface. Oxide coarse grit. 4" x 60' roll.

G1739141 **\$34.99**



**SPILL PLATFORMS & PALLETS**


Flexible and comprehensive spill protection, containment and storage products.

Chemical-resistant HDPE construction features yellow tub with removable black flat-top grating for quick spill inspection and easier cleaning. Each features forklift pockets.

**EAGLE Modular Drum Platform**

Platform is flexible making it easy to reconfigure drum storage and dispensing areas. Interlocking low-profile design with built-in U-channel connectors makes loading and unloading easier. 2-drum capacity. 5,000 lb load capacity. 30 gal spill capacity. 51½" w x 26½" d x 6½" h.

G1116193 **\$76.99**

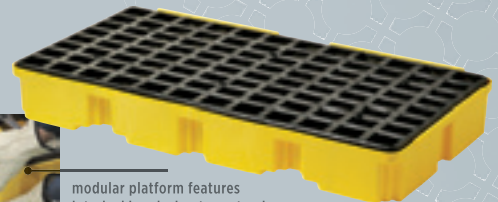

modular platform features interlocking design to customize configuration for any space



**EAGLE Spill Containment Pallet**

Pallet provides mobility for transfer, dispensing and waste collection areas and features a ¾" drain plug. 4-drum capacity. 8,000 lb load capacity. 66 gal spill capacity. 51½" w x 51½" d x 8" h.

G0975572 **\$196.70**

**HONEYWELL Eyesaline Wall Station**

Highly visible station is readily available for emergency flushing and decontamination. Durable, open-face design holds bottle firmly in place. Station includes 16 oz bottle with extended flow nozzle. Mounting hardware included. 7" w x 5" d x 13½" h. ■ ANSI STANDARDS

G2934976 station **\$18.82**  
G0377711 16 oz refill **\$6.33**

EYES ARE THE WINDOWS TO THE SOUL—  
YOU WANNA KEEP YOUR WINDOWS CLEAN, RIGHT?

**HONEYWELL Fendall Pure Flow 1000**

Delivers the required flushing with a saline solution for emergency eye care—no plumbing required. Factory-sealed fluid cartridges eliminate mixing, measuring and the opportunity for airborne particles or microorganisms to contaminate the fluid prior to use. Mounting hardware included. 7 gal capacity. 29" w x 23" d x 30" h.

■ ANSI, SEI STANDARDS

G2478515 station **\$314.85**  
G1000903 refill cartridges 2-pack **\$135.99**

**BAXTER Sterile Water**

Water is steam sterilized and provides irrigation for wound care. 1000 mL bottle.

G3919404 **\$3.89**

**MEDIQUE 99% Isopropyl Alcohol**

Provides powerful cleaning and disinfecting—treats minor cuts, scrapes and burns and helps prevent risk of infection.

G1870653 16 oz **\$2.82**  
G3752996 1 gal **\$25.12**

**VALUE BRAND Mueller Kold Instant Cold Packs**

Activates instantly when squeezed—needs no refrigeration. 6" x 9" single-use disposable packs.

G4150535 16-pack **\$12.54**

**VALUE BRAND BurnAid Burn Treatment**

Rapidly cools burns helping to prevent further tissue damage and aid the healing process. Burnaid also offers rapid and ongoing pain relief.

G3237963 25-pack **\$8.69**

**NORTH BY HONEYWELL First Aid Kits**

Kits contains bulk supplies that can be readily accessed when needed. They are ideal for manufacturing settings where a wide variety of first aid items are required. Waterproof plastic case. ■ ANSI STANDARDS

G3489236 25 people **\$17.49**  
G2675951 50 people **\$33.38**

*kits include: adhesive bandages, burn treatments, eye treatments, medicinals*

**VALUE BRAND Antiseptic Wipes**


Individual towelettes are saturated with a 0.4% Benzalkonium Chloride solution and are ideal for skin prep and wound cleansing. 5" x 8".

G0469463 20-pack **\$1.39**

**NORTH BY HONEYWELL Self-Adherent Wrap**

Elastic wrap is 2" wide and comes in a 5 yd roll.

G3280715 **\$2.29**

**MAGNUM MEDICAL EMT Utility Scissors**

Angled scissors are designed to remove bandages close to the skin without causing injury. Shears have serrated edges to help cut through tough materials. Stainless steel construction with colored plastic handle. 7½" blade.

G4095813 blue  
G4096294 orange  
G4230326 red  
G4016031 yellow  
each **\$2.83**

G4223511 magenta  
G4053472 purple  
G4141733 teal

**RAPID COMFORT Bandages**

Adhesive plastic strip bandages measure 1" x 3".

G2750237 100-pack **\$3.99**

**GUARD-TEX Self-Adhering Safety Tape**

Keep fingers, palms and wrists safe from abrasive or heated objects while retaining dexterity and sensitivity. Perfect for working in practically every manufacturing operation and handling components of all sizes. Prevents fingerprints and accidental etching on various surfaces. Self-adhesive, non-allergenic tape will not stick to skin, hair or clothing. ¾" x 30 yd roll.

G3787052 16-pack **\$14.99**

**NOTRAX Knee RX Specialty Mats**

Designed for extreme kneeling applications—such as on gravel, asphalt, concrete, tile, and wood flooring. Provides ergonomic support by reducing trauma, stress and strain on the knees and lower back. Made from a nitrile/PVC foam blend offering resistance to oils and greases. Heavy-duty version offers a durable rubber bottom surface for long-lasting wear in the roughest environments. 12" w x 22" d x 1" h.

G2996384 standard **\$18.04**  
G0593871 heavy duty **\$23.66**

**CURAD Pro-Gauze Pads**

Sterile pads are made of non-woven rayon/polyester with an absorbant layer. 2" x 2".

G4058941 25-pack **\$2.59**





**VALUE BRAND Safety Vests**

Polyester mesh material allows air and moisture circulation. Reflective vests have 1" vertical stripe and elastic side straps. ▶ **MORE ONLINE**

- G0007682 *medium/large* **\$4.99**
- G0007716 *x-large/3x-large* **\$6.49**

**VALUE BRAND Safety Sashes**

Visible from long distances. Sash is made of polyester with a snap closure and includes a pocket for holding a pen or safety glasses.

- G0007113 *small/medium* **\$18.10**
- G0007131 *2x-large/3x-large* **\$18.10**
- G0007122 *large/x-large* **\$18.10**



**VALUE BRAND Pennant Strings**

Pennants are sewn onto reinforced polypropylene cording. 12" x 9" pennants (36). 60' length.

- G3000882 **\$4.79**



**FIRST ALERT Smoke Alarm**

Basic battery operated smoke alarm is perfect for use in existing multi-family applications. Features a hinged cover for easy battery replacement. Lighted power and alarm indicator with silence feature and tamper-resistant locking pin. 9V battery operated.

- **UL STANDARDS**
- G2872572 **\$4.71**



**CORTINA Stop/Slow Traffic Paddle**

ABS plastic sign is silkscreened and has a 9" plastic handle. Ideal for school crossing guards, police and plant security guards. 18" x 18".

- **MUTCD STANDARDS**
- G2476031 **\$27.49**



**VALUE BRAND Traffic Cones**

Cones are stackable for easy storage and are made of injection-molded polyethylene. 18" height. 11" base.

- G0896585 *blue*
- G1715016 *green*
- G1302411 *red*
- G2431511 *white*
- G2133765 *yellow*
- each **\$7.69**



**KIDDE Pro Dry Chemical Fire Extinguishers**

Durable metal valve assemblies and metal handles and levers. Cylinders are manufactured from steel and are powder coated for corrosion protection. Easy-to-read gauge tells you the fire extinguisher is charged and ready for use. Instruction label uses graphics to show steps required to operate. Non-toxic monoammonium phosphate extinguishing agent. 195 psi operating pressure.

- **OSHA STANDARDS**

- 10 lb Size**
- 17 to 21sec discharge time.
- 20' range. ■ **4A:60B:C**
- UL RATING**
- G0629562 **\$54.04**

- 20 lb Size**
- 20 to 24 sec discharge time.
- 16' to 20' range. ■ **6A:80B:C**
- UL RATING**
- G2597567 **\$103.49**



**CORTINA Safety Flares**

Highly-visible, nonspiked flares ignite with self-contained striker—20 minute duration. Red flare. 11½" length.


- **UL STANDARDS**
- G1954574 72-count **\$169.99**

**CORTINA EZ Grab Delineator Posts**

Made from 100% impact-resistant, linear low-density polyethylene material, delineator posts feature 3" high-intensity prismatic collars and a molded-in handle for easy movement. Permanent-mount post features mountable aluminum base. Portable posts include a 10 lb recycled rubber base. 4" post diameter. ■ **NCHRP-350 STANDARDS**

- Permanent Mount**
- 43" height. 7" aluminum base.
- G2425631 **\$24.99**

- Moveable**
- 45" height. 10 lb rubber base.
- G2879536 *blue*
- G0343664 *orange*
- G2199906 *white*
- G2110753 *yellow*
- each **\$31.99**

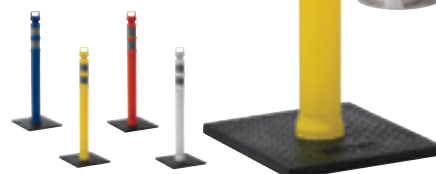

**VALUE BRAND Traffic Cones**

Flexible, injection-molded PVC cones withstand high-speed impacts and snap back into shape. Stackable for easy storage. Indoor/outdoor use.

- **NCHRP-350, MUTCD STANDARDS**
- G3022467 18" x 15" **\$7.99**
- G1636521 28" x 14" **\$12.99**



**CORTINA Retractable Cone Bar**

Designed to be used with PVC traffic cones. Extremely versatile—great for road and utility work sites, parking lots, pedestrian crossways and any other areas that need a fast and unique barrier system. Lightweight, exterior-grade PVC. Easily extends from 5' to 8' with unique push pin locking mechanism.

- G4013387 **\$20.99**

**EAGLE Type I Safety Can**

Safety cans with leaktight, self-closing spouts are safe for handling and storage of gasoline and other flammable liquids. Galvanized steel model features an ergonomic, all-steel handle and chemical-resistant, high-gloss powder-coated finish. Cans have a single opening for both filling and transfer of flammable liquids into containers with wider openings. 5gal capacity.

- **FM, UL, ULC, OSHA STANDARDS**
- G2804277 **\$31.85**





**NOTRAX #979 Saddle Trax  
Anti-Fatigue Runner**

Vinyl diamond-plate top surfaces made with 100% recycled materials, are long wearing and hold up to mild chemicals. Red Stop backing eliminates mat movement without any tacky or sticky residue. Engineered to meet the toughest requirements of today's industrial applications. All four sides feature a beveled edge to minimize tripping. 1" thickness. 3' x 12'.

■ OSHA STANDARDS  
G0914627 **\$411.81**

**NOTRAX #419 Diamond Sof-Tred  
Anti-Fatigue Mats**

Dyna-Shield enhanced top surface resists abrasion. Non-directional diamond deck plate provides extra traction. Dense, closed-cell vinyl sponge construction offers exceptional comfort, helping to relieve back and leg strain. Easy to clean. Beveled edges on all four sides of mat minimize tripping. ½" thickness.

■ OSHA STANDARDS  
G1271076 3' x 5' **\$37.35**  
G2660034 3' x 12' **\$103.09**

**NOTRAX #410 Airug  
Anti-Fatigue Runner**

Low-profile corrugated top surface provides directional traction. Dense, closed-cell vinyl sponge construction offers exceptional comfort, helping to relieve back and leg strain while providing a barrier to cold floors. Easy to clean. Beveled edges on all sides minimize tripping. ¾" thickness. 2' x 60'.

■ OSHA STANDARDS  
G0721131 **\$191.55**

**WEARWELL #477 WorkSafe  
Anti-Fatigue Drainage Mat**

Wet-area antifatigue matting features extra-thick, rubber construction and is ideal for use around water and mild chemicals. Available as a single workstation mat or can be attached together with connector strips to form virtually any size or configuration. Grease resistant. ¾" thickness. 2' x 3'.

G1331391 **\$49.99**

**MSA****Smoke Tube Kit**

Generate controlled smoke to help user see velocity, direction and flow of slow-moving air currents. For use in mine shafts and tunnels, commercial buildings and industrial processing plants. Glass tube with break-off tip.

G3093772 **kit \$109.84**

kit includes: aspirator bulb, rubber plugs (2), smoke tubes (6), carrying case

G2598732 **replacement tubes 12-pack \$78.99**

**SAFETY TECHNOLOGY INTERNATIONAL****Rex Plus Electronic Watchdog Alarm**

Rex Plus can "see" through thick doors, walls and glass. When movement is detected, alarm will alert you with the sounds you have chosen—switches from the watchdog mode to the tranquil sounds of nature with the simple switch of a button. Plastic construction.

G0262945 **\$72.99**

**FALCON Mighty Sonic Horn**

Durable, portable horn is built for long-lasting reliability. Convenient push-button operation delivers a piercing 120 dB blast at 10 feet. 100% ozone safe and non-flammable. 8oz can.

G0819612 **\$16.29**

**CRC Smoke Test  
Smokeless Aerosol Tester**

Convenient, easy and safe product to test the functional ability of a smoke detector. Also checks for obstructions or debris, which clog detector vents and prevents smoke from properly entering the sensing chamber. Aerosol spray extends user reach up to 6', allows testing to be done while standing safely on the floor. 6 oz can.

■ OSHA, UL, NFPA STANDARDS  
G3127564 **\$9.93**

**SAFETY TECHNOLOGY  
INTERNATIONAL  
Emergency Exit  
Stopper Station**

Multipurpose pneumatic adjustable timer button covers a wide range of applications. Unique, curved design helps protect against accidental activation. For indoor use. Blue polycarbonate construction. 240 VAC. 3¼" w x 1⅞" d x 4⅞" h.

■ UL, CUL, ADA STANDARDS  
G1676342 **\$129.99**

**BW TECHNOLOGIES****GasAlertClip Extreme  
Single-Gas Detector**

Durable, reliable and easy to use with no downtime. Record keeping is accurate and easy with automatic event logging. Full function self-test of sensor, battery status, circuit integrity and audible/visual alarms. Bright wide-angled visual alarm bars. Detects oxygen—0 to 30% volume sensor. LCD display. Includes sensor, stainless steel alligator belt clip, test cap, hose manual and training CD.

G4961582 **\$123.09**

**EDWARDS SIGNALING 270 Series  
Fire Alarm Pull Station**

Single-action pull stations are sturdy and designed for economical installation. Replaceable glass indicates when a station has been activated. Ideal for fire alarm installations in schools, hospitals, factories and industrial locations. Diecast metal construction. Wall mount. 3⅞" w x 2⅞" d x 4⅞" h.

G3378383 **\$19.93**

**SAFETY TECHNOLOGY INTERNATIONAL  
Stopper II Pull Station Cover**

Covers deter malicious and accidental fire alarms without restricting legitimate alarms. Covers with alarms have a 95/105 dB selectable horn that activates when cover is opened. Fits over most manual pull stations. Clear polycarbonate construction. Wall mount. 7⅞" w x 3⅞" d x 10⅞" h.

■ UL, CUL, ADA, FM, NY TO BSA STANDARDS  
G1595151 **\$71.98**





**CHEMSORB Portable Decontamination Kit**

Universal sorbent combines extraordinary absorption power with safe, convenient disposal. Contains all of the necessary items for effective, safe and legal decontamination. 12½" w x 14½" d x 12½" h. **EPA STANDARDS**

G4078873 kit **\$115.99**

*Kit includes: water containers, emergency eyewash solution, antibacterial hand and body soap, extra-large disposable towels, coverall, nylon carrying bag*



**SALISBURY Insulating Roll Blanket**

Blankets can be easily custom-cut to fit each application at the job site. Clear PVC allows visibility of insulated surfaces. 3' x 30'. 7500 VAC (max). **ASTM STANDARDS**

G2203056 **\$396.45**



**SALISBURY Blanket Clamp Pin**

Holds insulating blankets in place. Fiberglass reinforced nylon construction with molded rubber tips to increase slip resistance. 5" opening. 9½" length.

G2781852 **\$10.99**

**SALISBURY Static Discharge Stick**

Designed to safely remove the static charge after de-energizing. Tool is pre-assembled and includes a brass alloy U-hook, 4' closed cell foam-filled tubular fiberglass stick and 6' copper grounding cable attached to a bronze flat jaw serrated clamp.

**ASTM STANDARDS**  
G0426702 **\$305.22**



**SALISBURY Insulated Rescue Hook**

Used to withdraw an injured worker out of a hazardous area. Featuring a 6' tubular fiberglass handle for superior electrical insulation and a coated heat treated body hook with an 18" opening. **ASTM STANDARDS**

G1558505 **\$244.65**



**DQE Decon Wand**

The perfect accessory to easily expand your existing system or use alone for small-scale decon procedures. Simply connect this hand-held device to a standard garden hose. The wand comes in two pieces for compact storage and assembles with a quick-connect coupling. The valve allows for shutoff and water flow adjustment. 44½" PVC wand.

G4751345 **\$105.22**

**DQE Decono Decontamination Shower**

Portable 5-piece unit is designed for limited-space or field applications. Top shower head can be used independently or together with lower shower head to provide thorough decontamination. Includes vinyl bag for transport and storage.

56" w x 26" d x 87" h.  
G4751327 **\$379.99**

**DQE Decon Shower Sponge**

Soft, disposable sponge allows patients to decon themselves gently and thoroughly. 3" x 5" sponge with HDPE handle.

G4013511 **\$9.15**



**R & R TEXTILE Thermal Blankets**

Long lasting 100% cotton blankets provide natural warmth and softness. Blankets are preshrunk and have colorfast dye. Lightweight, soft fleece with anti-pill finish for long term use. 66" x 90".

G3111534 white  
G0135134 jade  
each **\$26.99**

G0135116 beige  
G0135143 rose



**STEARNS Thermal Protective Aid Suit**

This oversized, water-resistant suit was designed to inhibit hypothermia during prolonged outdoor exposures. Polymer-coated fabric repels moisture and reduces heat loss. Attached sleeves and taped seams offer added protection against bitter conditions.

Reflective material around the head and neck enhance visibility. Fits 47" chest. 15.5 lb buoyancy.

**USCG, SOLAS STANDARDS**  
G2152482 **\$58.87**

**FULTON Life Vest Lights**

Personal Flotation Device (PFD) light attaches to lifevest. Orange body with clear lens. Requires a D battery.

**USCG STANDARDS**  
G4158926 **\$6.89**



**STEARNS Rescue Mate Rescue Bag**

Throw bag features 1" wide reflective tape for visibility, quick-release carrying strap and 70' floating polypropylene rope. 1800 lb tensile strength. **USCG STANDARDS**

G3038725 **\$41.49**



**STEARNS Crew Mate Vest**

Equipping you for any situation you may encounter on the water. 3M Scotchlite SOLAS-grade reflective strips improve visibility. Contoured neckline provides comfortable wear while hinged back allows for easier storage. An added light loop on shoulder provides quick, convenient flashlight storage. Belt and chest strap securely fit the body. Fits 30" to 52" chest. 22lb buoyancy.

**USCG STANDARDS**  
G2027173 **\$40.67**



**STEARNS Force II Life Vest**

Help keep yourself safe during a challenging day offshore. Foam retains buoyancy, even when punctured. SOLAS-grade reflective strips improve visibility. Compatible with most types of fall protection harnesses for added safety. Self-extinguishing construction reduces fire danger risks. Dual encircling belts with snag-resistant buckles securely adhere to the body. Fits 30" to 52" chest. 15.5lb buoyancy

**USCG STANDARDS**  
G2510821 **\$49.99**



**MUSTANG SURVIVAL Ring Buoy**

Designed to be used onboard commercial vessels, offshore installations and larger yachts. Molded linear, low-density polyethylene with SOLAS-grade high-visibility reflective tape and rope. 30" diameter. 32 lb buoyancy. **USCG STANDARDS**

G1227414 **\$66.73**



**MUSTANG SURVIVAL Ring Buoy Bag**

High-visibility orange bag holds rope that can be used to extend reach. 90' multi-filament polypropylene rope.

G4213492 **\$25.55**





**SENTRY SAFE Security Safe**

Don't be vulnerable to theft—feel confident in the security of your valuables. Designed to secure laptops, cell phones, iPod devices, GPS units and other valuables. Solid steel construction with four live-locking bolts and concealed hinges. Programmable lock with key override for quick and easy access. Carpeted interior features two multi-position shelves and bungee organizational system. Includes hardware to bolt to the floor. 2.3cu-ft capacity. 15 $\frac{3}{8}$ "w x 16 $\frac{1}{8}$ "d x 24"h. 105lb net weight.

G3521411 **\$298.69****SENTRY SAFE Electronic Security Box**

Easy to use for cash storage needs. Dual locking capability provides added security—programmable lock with key override. Durable double-walled steel construction with carry handle for added convenience and flexibility. 12 $\frac{7}{8}$ "w x 10 $\frac{1}{2}$ "d x 5 $\frac{3}{8}$ "h. 11.5lb net weight.

G1290195 **\$28.69****SENTRY SAFE Fire-Safe Box**

A great item to secure your home and office belongings. Features a key lock for privacy. 0.15 cu-ft capacity. 12 $\frac{3}{8}$ "w x 10 $\frac{1}{4}$ "d x 6 $\frac{1}{8}$ "h. 11.7lb net weight. ■ UL, ETL VERIFIED 1/2-HOUR FIRE PROTECTION

G0525865 **\$16.99****MOTOROLA Talkabout Two-Way Radios**

With a range of up to 27 miles, an emergency alert feature and flashlight, these radios provide a convenient total emergency preparedness communication device. 22-frequency capacity with 121 privacy codes to reduce interruptions. FRS/GRMS bands.

G2383744 set **\$58.82**

set includes: radios (2), belt clips (2), dual drop-in charger, charging adapter, AA NiMH rechargeable battery packs (2), emergency preparedness checklist sheet, user's guide

**MOTOROLA****RDX Series Two-Way Radio**

Durable analog radio provides clear audio quality and expanded frequency capability. Operates on VHF business frequencies. 39+ programmable analog codes and 84+ programmable digital codes. Allows for programmable frequencies to be added later. Programming cable (G2128831) required to program radio on licensed frequencies and to access programmable features. Includes rechargeable battery, wall charger, removable antenna and belt clip. 300,000 sq-ft indoor range (18 floors). 5W output. 10 channels. 146 to 174MHz. FCC license required. 1 $\frac{3}{4}$ "w x 2 $\frac{1}{4}$ "d x 4 $\frac{1}{2}$ "h.

■ MILITARY STANDARDS

G4449295 **\$259.00****VALUE BRAND Key Control Cabinets**

Keep track of loaned keys. Record loaner information (key number, date, and recipient) on the "out key" tags and hang them in the loaned keys area. Steel cabinet with beige enamel finish features built-in slotted steel key racks, numbered white snap-hook key tags, control tags and a numbered lock location chart. Door has full length hinge and key lock—2 keys included. Wall mount.

G1787265 8"w x 2 $\frac{1}{2}$ "d x 12"h (50 card capacity)G1963175 7 $\frac{1}{4}$ "w x 1 $\frac{1}{8}$ "d x 28 $\frac{3}{4}$ "h (50 card capacity)G2847126 13"w x 3 $\frac{1}{4}$ "d x 17"h (120 card capacity)**\$29.99****\$39.99****\$59.99****VALUE BRAND****Replacement Key Tags**

Key tags help to identify and organize keys. 1 $\frac{1}{2}$ " x 1 $\frac{1}{2}$ " tags feature a slot to hang in cabinet and a nickel-plated snap hook to hold keys.

G1090241 50-pack **\$10.99**



**MASTER LOCK  
Resettable Combination Padlocks**  
Set-your-own combination convenience provides thousands of combinations. Hardened steel shackle.  $\frac{5}{16}$ " diameter is 1" wide. 2" body width.

**Brass Construction**  
G0639676 1" shackle height **\$11.41**  
G1795412  $2\frac{3}{4}$ " shackle height **\$13.10**

**Black Die-Cast Construction**  
G0919642 1" shackle height **\$7.77**



**MASTER LOCK  
Keyed Alike Padlock**  
Brass body and cylinder offer corrosion resistance. Case-hardened shackle. Includes key #3231 (2).  $\frac{1}{4}$ " diameter shackle measures  $1\frac{3}{16}$ " x  $1\frac{3}{16}$ ".  $1\frac{1}{2}$ " body width.  $\frac{1}{2}$ " body thickness.  
G1937765 **\$3.12**



**MASTER LOCK  
Breakaway  
Shackle Padlock**  
Laminated steel padlocks feature a

warded tumbler and a special breakaway shackle for emergency access to sprinkler shut-off valves and fire hoses. Shackle is easily broken with a hammer blow. Padlock is keyed alike and includes key #229 (2).  $\frac{9}{32}$ " diameter shackle is  $1\frac{3}{16}$ " high.  $1\frac{3}{4}$ " body width.

G3468884 **\$4.20**



**MASTER LOCK  
Combination Padlock**  
Antishim technology features a unique flat latch technology that blocks shim tools from opening the lock. Ideal for storage lockers, combination locks have a reinforced weather-resistant stainless steel outer case.

3-number combination with key override—control key V660 NOT included.  $1\frac{1}{8}$ " body width.  $\frac{3}{4}$ " shackle height.

G1266632 **\$4.64**



key sold separately



**KIDDE KeySafe  
Permanent  
Pushbutton Key  
Box**

Convenient for after school access, rental or vacation properties and emergency access. Codes can be changed when needed. Stores up to 5 keys. Constructed of die-cast metal with a titanium finish. Includes mounting hardware.  $2\frac{1}{2}$ "w x  $2\frac{1}{4}$ "d x  $4\frac{1}{2}$ "h.

G3025041 **\$26.85**



**MASTER LOCK Commercial Keyed Padlocks**  
Laminated steel body provides superior strength. Hardened steel shackle provides greater resistance to cutting. Countersunk rivets to reduce potential for prying and dual bumpers to prevent damage to property. Hardened bottom plate protects from drilling. Dual lever-locking shackle mechanism. Padlocks are keyed alike and include keys (2).

G2892915  $\frac{3}{4}$ " shackle height **\$5.49**  
G2756381  $1\frac{3}{16}$ " shackle height **\$6.08**  
G2280381  $2\frac{1}{2}$ " shackle height **\$7.19**

**BRADY Group Lockout Box**  
For group lockout situations involving a large number of workers and equipment. Portable lockbox is made of heavy-duty steel and is powder coated for extra rust resistance. Lockable lid accommodates up to 12 padlocks. Slot in front allows keys to be inserted when box is locked. 9" w x  $3\frac{1}{2}$ " d x 6" h.  
G0961703 **\$29.89**



**MASTERLOCK Lockout Padlock**  
Lightweight, nonconductive and durable Zenex thermoplastic padlock body can be customized with permanent write-on labels. Keyed different 6-pin tumbler cylinder. Key retaining feature ensures that padlock is not left unlocked. Hardened steel shackle.

$\frac{1}{4}$ " diameter shackle measures  $2\frac{9}{32}$ " x  $1\frac{1}{2}$ ".  $1\frac{1}{2}$ " x  $1\frac{3}{4}$ " body. ■ OSHA STANDARDS

► MORE COLORS ONLINE  
G0062605 **\$7.20**





MORE THAN 400,000 ITEMS ONLINE

**BRADY Bilingual Safety Signs**  
Bilingual signs communicate in both English and Spanish. Constructed of plastic with protected graphics, panels have round corners and are punched for mounting. Designed for indoor/outdoor use in light-duty industrial, utility, commercial and institutional environments. 10" x 14".


■ OSHA STANDARDS  
G0199857 *hearing*  
G0199866 *eye*  
G0199875 *lift trucks*  
each **\$8.99**



**VALUE BRAND Danger High Voltage Signs**

Place warning sign in areas of high voltage. Surface mount. Self-adhesive.

G4481854 3½" x 5" **\$1.23**  
G4481556 7" x 10" **\$4.10**



**BRADY Floor Signs**

Durable safety signs offer a highly visible way to communicate important safety messages in your facility. Constructed of surface printed vinyl with a velvet embossed clear vinyl nonslip overlaminates. Featuring a pressure sensitive acrylic adhesive, signs stick to almost any dry, clean surface. "Exit" sign glows in the dark for over 10 hours. 17" diameter. ■ ASTM STANDARDS

► MORE DESIGNS ONLINE  
G1712767 *warning forklift traffic*  
G3031944 *exit (glow-in-the-dark)*  
each **\$23.99**



**ACCUFORM SIGNS Caution Sign**  
Place on electrical panel to keep people at a safe distance. Surface mount. Self-adhesive vinyl. 7" x 10".  
G3860963 **\$7.29**



**BRADY Shipping & Receiving Traffic Sign**  
Indicate pickup/dropoff areas for visiting delivery drivers. Engineer-grade aluminum. 24" x 18". ■ MUTCD STANDARDS  
G1472012 **\$54.99**



**LYLE Stop Sign**  
Inform drivers of the laws that govern your roadways to assure safety and keep traffic flowing smoothly. High-intensity prismatic aluminum construction. 12" x 12".  
■ MUTCD STANDARDS  
► MORE SIZES ONLINE  
✓ MINIMUM 70% POST-CONSUMER RECYCLED CONTENT  
G0228365 **\$19.99**



**BRADY No Loitering Sign**  
Identify areas where you don't want people to congregate. Engineer grade aluminum. 9" x 12". ■ MUTCD STANDARDS  
G0212563 **\$7.99**

**BRADY Handicapped Parking Sign**  
Indicating reserved parking, this sign is constructed of reflective sheeting applied to an aluminum panel. Engineer grade aluminum. 12" x 18".  
■ MUTCD STANDARDS  
✓ MINIMUM 70% POST-CONSUMER RECYCLED CONTENT  
G0211626 **\$25.99**



**TAPCO Sign Post**  
U-channel posts are made from new billet steel with a green powder-coated finish. Prepunched ⅜" mounting holes on 1" centers accommodate most standard traffic signs. Ribbed-back design allows sign mounting on both the front and the back of the post—mounting hardware sold separately. 3½" w x 1⅞" d x 10" h.  
G4332693 **\$19.99**







**PRINZING Fire Extinguisher Labels**  
Identify the presence of a fire extinguisher with one of these labels. Self-adhesive vinyl.

G3373465 4" x 4" 5-pack **\$8.92**  
G1757131 5" x 7" 5-pack **\$14.99**

**BRADY Fire Extinguisher Sign**

Indoor/outdoor high performance pressure sensitive safety sign. Self-adhesive polyester. 3½" x 14". ■ ISO STANDARDS

G0179995 **\$4.89**



**PRINZING High-Visibility Fire Extinguisher Sign**

This high-visibility plastic sign features, bright colors, graphics and pictograms to communicate the location of a fire extinguisher. V-shaped sign is designed to be seen from multiple access points. Mounts to walls and columns with predrilled holes. 9"w x 4"d x 6"h.

G0356797 **\$10.06**


YOU WANT A SIGN?  
HERE'S A SIGN!

**ACUITY LITHONIA LQM Quantum LED Exit Sign**

Ideal for applications requiring attractive, quick-installation exit signs and low energy consumption. Precision-molded thermoplastic housing is impact- and scratch-resistant, corrosion-proof and UV-stabilized to resist discoloration. Fully assembled single-face exit with extra faceplate for conversion to double-face standard. Innovative snap-together design allows installation in less than three minutes. Universal mount—top, end or back. 6" letter height with ¾" stroke. LED lamp. 0.71W. 120/277V. NiCAD battery. 11¾"w x 1¾"d x 7½"h.

■ UL, NFPA, NEC, OSHA STANDARDS

G1967043 **\$37.29**



**COSCO Open/Will Return Notice Sign**

Need to step out for awhile? Use one of these to let visitors know when you'll be back. Made of flexible, weather-resistant plastic, sign measures 5" x 6" and features a 2-sided design with moveable clock hands.

G3270391 **\$1.70**

**BRADY No Smoking Sign**

As state smoking bans increase, stay compliant with smoking regulations and laws by displaying these signs.

Indoor/outdoor. Self-adhesive polyester. 3½" x 5". ▶ MORE ONLINE

G0133244 **\$1.98**



**COSCO Restroom Signs**

Durable molded signs include pictograms and feature braille for ADA compliance. Adhesive mounting pads included. Vinyl construction. 6" x 9". ■ ADA STANDARDS

G2099027 *unisex* each **\$4.99**  
G1127183 *handicapped* each **\$4.99**  
G0422712 *men and women* set **\$9.99**



**BRADY Safety Signs**  
Plastic panel features protected graphics, round corners and punched holes for application to rigid surfaces. Designed for use in light duty industrial, utility, commercial and institutional environments. Recommended for both indoor and outdoor use. 14" x 10". ▶ MORE ONLINE

G0201905 *caution*  
G0200602 *danger*  
G1439706 *restricted area*  
G0133147 *not an exit*  
G0133454 *exit*  
each **\$7.95**



**DEFLECTO Slow-Moving Vehicle Sign**

Constructed of orange high-impact ABS plastic with red reflectors, this sign measures 14" x 16".

■ ASAE STANDARDS  
G3915037 **\$9.49**






# PLUMBING



TUBING  
// page 27



CEMENTS  
// page 29



FITTINGS  
// page 26



HANGERS  
// page 28

NEED A VALVE, SEALANT, PUMP OR PLUNGER? ZORO HAS EVERYTHING YOU NEED **AND** MORE!

Plumbers don't have it very easy. In fact, from plumber's butt jokes to clogged toilets, plumbers sometimes have it pretty rough. Zoro wants to make your plumbing projects and repairs easier by providing a growing selection of plumbing supplies. Fittings, pumps, specialty plumbing tools, water heaters, sinks and faucets are just a few examples of our over **42,000** plumbing items. View the entire selection online—you can thank us later!



CUTTERS  
// page 30



URINALS  
// page 37



WRENCHES  
// page 31



PUMPS  
// page 32, 33, 34, 35



FAUCETS  
// page 38

POPULAR BRANDS

more BRANDS online



MEMORIES OF THROWING BALL VALVES AROUND IN THE BACKYARD?  
RELIEVE THE NOSTALGIA.



**SHARKBITE Brass Ball Valves**

Low-lead, instant push-fit brass ball valve connections ease installation and require no clamps, glue, soldering, tools or unions. For use with copper, CPVC and PEX. Full-port design allows water to flow easily through the valve. Brass body and stem with EPDM seals. Zinc-plated steel lever handle. 200 psi WOG (max). 200 psi WSP (max). 0° to 200°F.

■ ASSE, CUPC, IAPMO, IPC, UPC, NSF STANDARDS  
◆ CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS

- G4614102 ½" **\$10.44**
- G4546123 ¾" **\$13.10**

**HAYWARD PVC Ball Valve**

Light-duty ball valves can be used with Schedule 40/80 pipe and fittings in water applications. One-piece design with EPDM seals and santoprene seats requires no ball/seat adjustment. Full port. Blowout-proof stem. Socket connections. 150 psi WOG (max). 35° to 140°F.

- G0700393 1" (4.0" length) **\$4.59**
- G2908683 1½" (4.3" length) **\$4.79**
- G2762864 1½" (4.8" length) **\$4.99**
- G0426727 2" (5.7" length) **\$5.19**



**APOLLO Brass Ball Valves**

These two-piece, full-port valves are for use in plumbing applications with water, oil and gas. Along with PTFE seats and packing, brass ball and stem, these valves have a steel lever handle and FNPT connections. 600 psi WOG (max). 150 psi WSP (max).

-40° to 400°F. ■ MSS, UL, CSA, FM, NSF STANDARDS

▶ MORE SIZES ONLINE

- G0363596 ½" **\$7.98**
- G2717251 ¾" **\$8.79**
- G0928541 1" **\$8.99**
- G0854515 1¼" **\$19.54**
- G2759041 1½" **\$26.39**
- G1092131 2" **\$39.09**



**VALUE BRAND Brass Ball Valves**

Use these full-port valves for water, oil and gas plumbing applications. The two-piece, valves have PTFE seats and packing, a steel lever handle and brass ball and stem. FNPT connections. 600 psi WOG (max). 150 psi WSP (max).

-40° to 400°F. ■ UL, CSA STANDARDS

- G3367305 ¼" **\$3.59**
- G2275716 ¾" **\$3.59**
- G0668787 ½" **\$4.59**
- G2829836 ¾" **\$6.59**
- G3364286 1" **\$9.99**
- G1636555 1¼" **\$17.99**
- G3163946 1½" **\$19.99**
- G2187236 2" **\$38.99**



**FLO-CONTROL BY NDS**

**Schedule 40 PVC Gate Valves**

Commercial-grade PVC gate valves are for positive shut-off in irrigation and cold water applications. PVC construction with polypropylene wedge. ABS hand-wheel handle. Nonrising stem. FNPT connections. 150 psi (max). 140°F (max).

◆ CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS

- G1230196 ½" **\$5.58**
- G1729804 ¾" **\$7.43**
- G3414555 1" **\$7.44**
- G2464016 1¼" **\$10.32**
- G1507414 1½" **\$15.82**
- G2270667 2" **\$19.99**



**APOLLO Bronze Ball Valves**

Use these valves in water, oil, gas and low-pressure steam applications. Two-piece valves have MPTFE seats and solid-ball design, blowout-proof stem and adjustable packing gland. Locking-lever handle is constructed of zinc-plated steel with vinyl grip. FNPT connections. 600 psi WOG (max). 150 psi WSP (max). -20° to 500°F.

■ MSS STANDARDS ▶ MORE SIZES ONLINE

- G0269577 ½" **\$11.49**
- G3045384 ¾" **\$18.99**
- G0493394 1" **\$23.49**
- G0905414 1¼" **\$49.99**
- G2637162 1½" **\$63.99**
- G3124834 2" **\$109.99**



**MILWAUKEE VALVE Bronze Gate Valves**

Class 300 bronze gate valves act as a positive shutoff and can be used fully open or fully closed. For use in steam, water, and compressed air applications. Bronze disc, wedge, stem and bonnet. Malleable iron hand-wheel handle. Full port. FNPT connections. 300 psi steam (max). 600 psi water (max). 550°F fluid (max).

■ MSS STANDARDS

▶ MORE SIZES ONLINE

- G2276653 ½" **\$40.78**
- G0718182 ¾" **\$48.56**
- G0714113 1" **\$70.92**
- G2174557 1¼" **\$127.35**
- G2159805 1½" **\$139.27**
- G1458563 2" **\$170.00**



**FLO-CONTROL BY NDS**

**Schedule 80 PVC Gate Valves**

Commercial-grade PVC gate valves are for positive shut-off in irrigation and cold water applications. PVC construction with polypropylene wedge. ABS hand-wheel handle. Nonrising stem. FNPT connections. 150 psi (max). 140°F (max).

◆ CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS

- G0697794 ½" **\$6.42**
- G0423701 ¾" **\$7.69**
- G3265866 1" **\$10.98**
- G1774726 1¼" **\$14.04**
- G1967515 1½" **\$17.98**
- G0268554 2" **\$21.69**



**VALUE BRAND Fittings**

Class 150 black malleable iron fittings are interchangeable with black cast-iron or steel. For use in low-pressure plumbing applications including air, water, natural gas and steam. All fittings feature NPT connections. 300 psi WOG @ 150°F. 150 psi saturated steam. ■ ASTM, ASME, UL, FM STANDARDS

**Hex Bushings**

G1785201	¼" x ¼" pipe size	<b>\$0.59</b>
G2612994	¾" x ¼" pipe size	<b>\$0.59</b>
G2275533	½" x ¾" pipe size	<b>\$0.59</b>
G0998496	½" x ¼" pipe size	<b>\$0.59</b>
G2635963	¾" x ½" pipe size	<b>\$0.69</b>
G0705196	1" x ¾" pipe size	<b>\$0.99</b>



**Tees**

G1751723	¼" pipe size	<b>\$0.99</b>
G2141221	¾" pipe size	<b>\$1.00</b>
G0500683	½" pipe size	<b>\$0.99</b>
G0634776	¾" pipe size	<b>\$1.19</b>
G1495191	1" pipe size	<b>\$1.89</b>



**Unions**

G2791923	¼" pipe size	<b>\$3.09</b>
G1182781	¾" pipe size	<b>\$3.04</b>
G1543875	½" pipe size	<b>\$2.89</b>
G3114194	¾" pipe size	<b>\$3.79</b>
G0914593	1" pipe size	<b>\$5.39</b>



**45° Elbows**

G3054572	¼" pipe size	<b>\$0.92</b>
G3338851	¾" pipe size	<b>\$0.92</b>
G1939384	½" pipe size	<b>\$0.71</b>
G3080795	¾" pipe size	<b>\$1.06</b>
G2202837	1" pipe size	<b>\$1.56</b>



**90° Elbows**

G1379445	¼" pipe size	<b>\$0.89</b>
G0733381	¾" pipe size	<b>\$0.89</b>
G1060647	½" pipe size	<b>\$1.19</b>
G2789351	¾" pipe size	<b>\$0.99</b>
G3194791	1" pipe size	<b>\$1.59</b>



**Pipe Caps**

G2358151	¼" pipe size	<b>\$0.58</b>
G0655505	¾" pipe size	<b>\$0.58</b>
G1268574	½" pipe size	<b>\$0.55</b>
G0670546	¾" pipe size	<b>\$0.55</b>
G2428106	1" pipe size	<b>\$0.95</b>



**Floor Flanges**

G2740166	¼" pipe size	<b>\$1.99</b>
G0633753	¾" pipe size	<b>\$1.99</b>
G1596061	½" pipe size	<b>\$2.09</b>
G1218567	¾" pipe size	<b>\$2.89</b>
G1529762	1" pipe size	<b>\$3.19</b>



**SHARKBITE Fittings**

Low-lead, instant push-fit dezincification-resistant (DZR) brass fittings easily connect copper, CPVC and PEX in any combination without the use of glue, soldering or unions. Tube connections. EPDM gasket construction. 200 psi (max). 0° to 200°F. ■ ANSI, ASSE, CUPC, IAPMO, IGS, IPC, UPC, NSF STANDARDS ● CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS

**Tees**

G4551145	¼" tube size	<b>\$11.07</b>
G4603103	½" tube size	<b>\$12.82</b>
G4524021	¾" tube size	<b>\$13.23</b>
G4579802	1" tube size	<b>\$26.05</b>



**Couplings**

G4558732	¼" tube size	<b>\$3.99</b>
G4630087	½" tube size	<b>\$5.37</b>
G4636134	¾" tube size	<b>\$5.98</b>
G4590302	1" tube size	<b>\$18.48</b>



**Elbows**

G4624663	¼" tube size	<b>\$8.29</b>
G4621407	½" tube size	<b>\$9.28</b>
G4523653	¾" tube size	<b>\$9.73</b>
G4574552	1" tube size	<b>\$14.12</b>



**ZURN PEX PEX Crimp Fittings**

Fittings easily install without flame, flux or solder and require no bonding agents, glue or solvents. Fittings resist corrosion, mineral buildup, rust and freeze damage. Suitable for new or retrofit construction and for hot or cold water distribution. Low-lead brass construction. PEX barb connections. 33° to 200°F. ■ ASTM, CSA, NSF STANDARDS ● CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS

**Tees**

G3746111	½" pipe size	<b>\$2.47</b>
G3744702	¾" pipe size	<b>\$4.70</b>
G3746942	1" pipe size	<b>\$7.99</b>
G3689445	1½" pipe size	<b>\$19.53</b>



**Couplings**

G3746994	½" pipe size	<b>\$1.34</b>
G3745131	¾" pipe size	<b>\$2.05</b>
G3746671	1" pipe size	<b>\$3.81</b>
G3656755	1½" pipe size	<b>\$8.42</b>



**90° Elbows**

G3745043	½" pipe size	<b>\$2.07</b>
G3747082	¾" pipe size	<b>\$3.70</b>
G3747484	1" pipe size	<b>\$7.11</b>
G3610031	1½" pipe size	<b>\$16.35</b>



**LASCO Schedule 40 PVC Fittings**

Pressure-rated fittings are intended for lower-pressure, cold water applications. Use with PVC primer and cement. Socket connections. 2" pipe size. 140°F (max). ■ NSF, ASTM STANDARDS ► MORE ONLINE



Cap  
G5275225 **\$0.61**




Coupling  
G5276433 **\$0.73**




Tee  
G5279197 **\$1.48**



90° Elbow  
G5278341 **\$1.20**



45° Elbow  
G5276661 **\$1.42**



Cross  
G5285095 **\$3.52**

**GF PIPING SYSTEMS Schedule 80 PVC Fittings**

Schedule 80 fittings have a higher pressure rating than Schedule 40 fittings and are for use in cold potable water applications. These nontoxic, lightweight fittings resist corrosion, chemicals and rust. Use with PVC primer and cement. FNPT connections. 140°F (max). ■ ASTM, NSF STANDARDS ● CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS

**Couplings**

G1833377	½" pipe size	<b>\$1.39</b>
G2391435	¾" pipe size	<b>\$1.99</b>
G2064325	1" pipe size	<b>\$1.99</b>
G0786825	1¼" pipe size	<b>\$2.49</b>
G1798203	1½" pipe size	<b>\$5.79</b>
G1770937	2" pipe size	<b>\$5.99</b>
G3006236	3" pipe size	<b>\$15.99</b>
G0758064	4" pipe size	<b>\$26.99</b>



**Tees**

G2275612	½" pipe size	<b>\$2.18</b>
G2243507	¾" pipe size	<b>\$2.39</b>
G1617664	1" pipe size	<b>\$5.19</b>
G1860783	1¼" pipe size	<b>\$5.69</b>
G1596856	1½" pipe size	<b>\$6.74</b>
G2967413	2" pipe size	<b>\$6.99</b>
G3348064	3" pipe size	<b>\$25.99</b>
G3171612	4" pipe size	<b>\$40.99</b>



**45° Elbows**

G2847625	½" pipe size	<b>\$2.49</b>
G0956471	¾" pipe size	<b>\$2.59</b>
G1866916	1" pipe size	<b>\$3.49</b>
G1696667	1¼" pipe size	<b>\$5.99</b>
G3107641	1½" pipe size	<b>\$6.29</b>
G1102254	2" pipe size	<b>\$8.89</b>
G1246883	3" pipe size	<b>\$26.99</b>
G3018811	4" pipe size	<b>\$41.99</b>



**90° Elbows**

G2142025	½" pipe size	<b>\$1.49</b>
G1023845	¾" pipe size	<b>\$1.89</b>
G2095834	1" pipe size	<b>\$1.99</b>
G1203386	1¼" pipe size	<b>\$1.99</b>
G0993474	1½" pipe size	<b>\$2.99</b>
G1117934	2" pipe size	<b>\$3.29</b>
G1693151	3" pipe size	<b>\$20.99</b>
G3123145	4" pipe size	<b>\$40.99</b>




**e7TIPS**  
technical resources


**Pipe Size Selection Guide**

Knowing the pipe size you are working with can be confusing. Many people assume that the "pipe size" refers to the outside diameter of the pipe. It doesn't. "Pipe size" refers to what is considered the nominal diameter. The easiest way to know what nominal pipe size you are working with is to use a conversion chart. For male threads, measure the outside diameter of the pipe or pipe fitting and use the chart to identify the corresponding nominal diameter a.k.a "pipe size". For female threads, measure the inner diameter to find the "pipe size".

**MALE PIPE/PIPE FITTING**  
MEASURE O.D.



**FEMALE PIPE/PIPE FITTING**  
MEASURE I.D.



*NOTE: "Pipe" and "tubing" are not measured the same way. Tubing is measured and named based on the actual outside diameter of the tube.*

pipe size	OD (male) or ID (female)	decimal equivalent
½"	¾"	0.313"
¾"	1½"	0.405"
1"	3½"	0.540"
1¼"	4¾"	0.675"
1½"	2½"	0.840"
2"	1¾"	1.050"
2½"	1½"	1.315"
3"	1¼"	1.660"
3½"	1½"	1.900"
4"	2"	2.375"
4½"	2½"	2.875"
5"	3"	3.500"
5½"	4"	4.000"
6"	4½"	4.500"





**HARVEL Schedule 40 PVC Pipe**

Pressure-rated pipe and fittings are intended for lower-pressure, cold water applications. Iron pipe size. Use with PVC primer and cement. 140°F (max). 10' length.

■ ASTM, NSF STANDARDS

② #	size	ID	OD	price
G2952205	½"	0.602"	0.840"	<b>\$3.69</b>
G3356297	¾"	0.804"	1.050"	<b>\$4.09</b>
G1563667	1"	1.029"	1.315"	<b>\$6.29</b>
G1742824	1¼"	1.360"	1.660"	<b>\$8.59</b>
G0365163	1½"	1.590"	1.900"	<b>\$9.39</b>
G2271927	2"	2.046"	2.375"	<b>\$12.69</b>



**ENDOT Polyethylene Pipe**

High-density, flexible black pipe is deep-well submersible to 140'. Use with PVC insert fittings. 100 psi (max). 100' length. ■ ASTM, NSF STANDARDS

◆ CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS

② #	PEX size	ID	OD	price
G2316097	¾"	0.824"	0.944"	<b>\$41.62</b>
G2921816	1"	1.049"	1.169"	<b>\$56.47</b>
G1453943	1¼"	1.380"	1.526"	<b>\$98.67</b>



**SHARKBITE PEX Tubing**

Exterior oxygen diffusion barrier limits oxygen permeation through the tubing wall in hydronic heating applications, to prevent corrosion of ferrous metal parts. SharkBite tubing is compatible with SharkBite fittings. 160 psi (max). 0° to 200°F. 300' length. ■ NSF, ASTM, CSA, AWWA STANDARDS

◆ CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS

② #	PEX size	ID	OD	price
G3038131	½"	½"	¾"	<b>\$274.97</b>
G0759412	¾"	¾"	1"	<b>\$352.44</b>
G1270771	1"	1"	1¼"	<b>\$567.76</b>

**GF PIPING SYSTEMS Schedule 80 PVC Pipe**

Schedule 80 has a higher pressure rating than Schedule 40. For use in cold potable water applications. These nontoxic, lightweight pipe resists corrosion, chemicals and rust. Use with PVC primer and cement. 140°F (max). 10' length.

■ ASTM, NSF STANDARDS ◆ CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS

G3330442	½"	<b>\$4.39</b>
G3378444	¾"	<b>\$6.49</b>
G0264616	1"	<b>\$8.49</b>
G1939804	1¼"	<b>\$11.99</b>
G3131493	1½"	<b>\$12.89</b>
G2615812	2"	<b>\$17.99</b>



**HARVEL HYDROKING CPVC Pipe**

Pressure-rated pipe resists most acids, aliphatic solutions, bases, halogens, oxidants and salts. Copper tube size (CTS) pipe with CPVC construction. 400 psi (max) at 73°F. 180°F (max). 10' length. ■ ASTM, NSF STANDARDS

◆ CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS

② #	size	ID	OD	price
G1847605	½"	0.469"	¾"	<b>\$5.02</b>
G1377144	¾"	0.695"	1"	<b>\$9.09</b>
G0370027	1"	0.901"	1¼"	<b>\$17.94</b>
G2938713	1¼"	1.105"	1½"	<b>\$27.55</b>
G3366797	1½"	1.309"	1¾"	<b>\$36.55</b>
G0680206	2"	1.716"	2½"	<b>\$56.49</b>

**KURIYAMA Flexible Tubing**

Flexible, nontoxic tubing is ideal for most food and beverage applications. Clear PVC construction. 25° to 150°F (-4° to 65°C). 100' length.

■ FDA STANDARDS

② #	ID	OD	psi @ 70°	price
G1679571	¼"	¾"	55 (max)	<b>\$16.66</b>
G1727774	¾"	½"	45 (max)	<b>\$21.99</b>



**ATP Polyethylene Tubing**

Tubing resists stress cracking caused by chemicals, soaps, solvents and oils. For use in food processing, pneumatic, water line, drain line, laboratory and process control plant applications. 125 psi (max). -50° to 140°F. ¼" ID. ¾" OD. 100' length. ■ FDA STANDARDS

G2267824	natural	G1643031	red
G2286304	yellow	G3210243	blue
G3363516	black		

each **\$18.97**



**MUeller INDUSTRIES Copper Tubing**

Copper refrigeration tubing easily connects air conditioning and refrigeration equipment, using sweating or flare fittings. All coils are nitrogen purged to reduce contaminants in the tubing. 32° to 400°F. 50' coil. ■ ASTM STANDARDS

◆ CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS

② #	size	ID	OD	psi (max)	price
G0793116	¼"	0.190"	¼"	1406	<b>\$34.99</b>
G1880532	¾"	0.311"	¾"	984	<b>\$55.64</b>



**MUeller INDUSTRIES Copper Tubing**

Thick-walled, Type L tubing is designed for above- or below-ground water service and hydronic heater applications. Tubing meets or exceeds building codes in all 50 states. 32° to 400°F. 60' coil. ■ ASTM STANDARDS

◆ CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS

② #	size	ID	OD	psi (max)	price
G2881654	¾"	0.315"	¾"	912	<b>\$77.67</b>
G2134535	½"	0.430"	½"	779	<b>\$109.99</b>

**ANVIL C-Type Beam Clamp**

C-clamps with setscrew and locknut are used for structural attachment to top or bottom of metal beams, purlins, channels or angle iron. For use with W-beams and M-beams. Malleable iron construction with hardened steel setscrew. 400 lb load (max). 3/8" rod size. 1 3/4" length. ■ ANSI, UL/CUL, FM, FEDERAL STANDARDS  
G2502132 **\$1.49**



**ANVIL C-Type Wide Mouth Beam Clamp**

Wide-mouth C-clamp is for use under roof installations with bar joist-type construction or to attach to structural shape flanges with the vertical hanger rod offset from the flange edge. Malleable iron construction with setscrew and lockout nut. 250 lb bottom load (max). 1 1/4" joist or flange thickness (max). 3/8" rod size. 1 3/4" length. ■ ANSI, UL/CUL, FM, FEDERAL STANDARDS  
G1997326 **\$1.89**



**CADDY Beam Clamp**

Universal beam clamp provides structural attachment for top or bottom of metal beams, purlins, channels or angle iron. Electro-galvanized malleable iron with hardened steel setscrew. 500 lb top load (max). 250 lb bottom load (max). 3/4" flange (max). 3/8" rod size. 3/4" length. 1 1/8" width. ■ ANSI, FEDERAL STANDARDS  
G1358314 **\$0.99**



**CADDY Multiflange Beam Clamp**

Multiflange beam clamp provides structural attachment to bottom of purlins and beams to support threaded rod. Swivel feature is ideal for sloped roofs. Electro-galvanized steel construction. 200 lb C- and Z-purlin load (max). 160 lb flat flange load (max). 3/8" rod size. 3 1/4" length. 3 1/4" width. ■ UL STANDARDS  
G2363462 **\$3.99**



**CADDY Rod Hanger Plates**

Iron plates provide structural attachment to support hanger rods from ceiling or wall. 180 lb load (max). 3/8" rod size. 2" pipe size.  
G2204745 copper-plated malleable iron **\$3.49**  
G2554167 electro-galvanized malleable iron **\$1.79**  
G1251083 malleable iron **\$1.29**

**ANVIL Clevis Hangers**

Light-duty clevis hangers are recommended for suspending stationary, noninsulated pipelines. 250 lb load (max). 3/8" rod size. ■ FEDERAL STANDARDS  
G2088055 1/2" **\$0.59**  
G0817896 3/4" **\$0.69**  
G3309993 1" **\$0.83**  
G2673307 1 1/4" **\$0.97**  
G1401312 1 1/2" **\$0.99**  
G1613087 2" **\$1.09**



**SMITH-BLAIR Pipe Repair Clamps**

Redi-Clamp pipe repair clamps are used for repairing pinhole leaks, punctures and splits. Drop-in bolts allow easy installation. Stainless steel construction with ductile iron lugs, nitrile gasket and carbon steel nuts and bolts. 150 psi (max). -20° to 180°F. 3" length. ■ NSF STANDARDS  
G0343445 3/4" **\$10.68**  
G1526777 1 1/2" **\$12.90**  
G2326161 2" **\$14.09**  
G3072894 3" **\$19.38**  
G2356182 4" **\$21.42**  
G2058497 6" **\$25.53**  
G2111767 8" **\$30.00**



**SMITH-BLAIR Pipe Repair Clamps**

Single-band clamps have 360° gasket seal for support and a "keeper bar" that helps close clamp during installation. Use to repair pipe without dismantling connections and to join pipes without threaded connections. Full-circle design with stainless steel construction, nitrile gasket and steel nut. 150 psi (max). -20° to 180°F. 7 1/2" length. ■ NSF STANDARDS  
G2839986 2" **\$96.82**  
G0931043 3" **\$99.32**  
G1675073 4" **\$106.45**  
G1068593 6" **\$127.26**  
G2473807 8" **\$150.78**



**CADDY Split Ring Hangers**

Split ring hangers are used for suspending stationary, noninsulated pipelines. They allow for piping runs close to ceiling or walls. Bolt and rivet are constructed of carbon steel. 180 lb load (max). 3/8" rod size. ■ FEDERAL STANDARDS

**Black Malleable Iron**

G2959792 1/2" **\$1.19**  
G3117283 3/4" **\$1.39**  
G2895645 1" **\$1.49**  
G0577437 1 1/4" **\$1.79**  
G1541504 1 1/2" **\$2.59**  
G1697351 2" **\$2.99**



**Electro-Galvanized Malleable Iron**

G3182252 1/2" **\$1.69**  
G0517605 3/4" **\$1.77**  
G2729221 1" **\$1.89**  
G0415265 1 1/4" **\$2.39**  
G1313243 1 1/2" **\$2.99**  
G1831803 2" **\$3.49**



**Copper-Plated Steel**

G2475094 3/8" **\$1.19**  
G1185107 3/4" **\$1.49**  
G1986117 1" **\$1.59**  
G0523092 1 1/4" **\$1.97**  
G1894295 1 1/2" **\$2.09**  
G1990326 2" **\$2.59**



**CADDY Cushioned Pipe Clamps**

Superfix clamps are used for suspending stationary noninsulated steel and copper pipelines. EPDM rubber sleeve provides an average of 20 dBA noise reduction. Unique hinged design eliminates the need to disassemble the clamp prior to installation. Welded 3/8" cap nut allows easy attachment to threaded rod. Corrosion-resistant electro-galvanized steel construction. 180 lb load (max). -58° to 230°F. ■ MSS STANDARDS



Q#	tube size	pipe size	price
G2496961	1/2"	3/4"	<b>\$1.17</b>
G2006891	3/4"	1"	<b>\$1.40</b>
G1355961	1"	1 1/4"	<b>\$1.68</b>
G0342142	1 1/4"	1 1/2"	<b>\$1.87</b>

**CADDY Tube and Pipe Clamps**

Push the tube into the clamp to close and lock the pipe into place. Fasten with wood screw, dual-threaded screw with or without collar, nail with collar or 1/4" threaded rod. Superklip clamps feature nonmetallic construction which is UV resistant and suitable for outdoor applications.




Q#	tube size	pipe size	load (max)	price
G2467272	1/2"	—	45 lb	<b>\$0.71</b>
G3479752	3/4"	—	55 lb	<b>\$0.94</b>
G0476226	1"	—	65 lb	<b>\$1.56</b>
G3478133	1 1/4"	1"	75 lb	<b>\$1.69</b>
G0270033	1 1/2"	1 1/4"	85 lb	<b>\$2.07</b>



**DMC Hanging Straps**


Duct straps are used for hanging pipe and ductwork. Hanger straps have alternating 3/16" nail holes and 1/4" bolt holes for multiple mounting options. 24-gauge steel.



**Galvanized Steel**  
G1669236 3/4" x 10' **\$1.45**  
G1759685 3/4" x 100' **\$10.02**

**Copper Plated Steel**

G2190763 3/4" x 10' **\$3.08**  
G2235362 3/4" x 100' **\$25.76**



**304 Stainless Steel**  
G0262902 3/4" x 10' **\$5.88**  
G0923991 3/4" x 100' **\$56.22**

**LOCTITE Pipe Sealant**

Semi-solid pipe sealant is for general-purpose use on metal pipes. 10,000 psi gas/liquid. -65° to 300°F. Off-white. 19 g stick.

G0633035 **\$12.29**



**PTFE SEALANT TAPES**  
ON PAGE 141

G0713361 *low density*  
G0426176 *med density*  
G1610655 *med density*  
G2651555 *high density*



**EZ WELD PVC Cleaner**

For use with PVC, CPVC and ABS pipe and fittings. Low VOC. -10° to 110°F application. Clear.

G2261892 8oz **\$3.68**  
G0664763 16oz **\$5.58**  
G3395463 32oz **\$7.08**



**PERMATEX Pipe Joint Compound**

Pliable compound seals oily fittings and resists loosening by thermal expansion. Use on water, steam, oil and fuel lines. For use in plastic-to-plastic or plastic-to-metal applications. -65° to 400°F. Black. 16 oz bottle.

G1623693 **\$5.92**



**EZ WELD PVC Primer**

For use with PVC and CPVC pipe and fittings. Low VOC. -10° to 110°F application. Purple. ■ NSF, IAPMO, ASTM STANDARDS

G1112011 8oz **\$3.86**  
G0904127 16oz **\$6.07**  
G1743594 32oz **\$9.64**



**EZ WELD PVC Primer**

For use with PVC and CPVC pipe and fittings. Low VOC. -10° to 110°F application. Clear. ■ NSF, UPC, ASTM STANDARDS

G0907821 8oz **\$3.13**  
G1762616 16oz **\$4.94**  
G2841596 32oz **\$8.63**



**PERMATEX Thread Sealant with PTFE**

General-purpose sealant has the lubricity of PTFE and it won't shred. Resists common shop fluids. For use in plastic-to-plastic or plastic-to-metal applications. Resists common shop fluids. -65° to 300°F. White. 16 oz brush-top bottle.

G2819065 **\$10.29**



**EZ WELD PVC Cement**

For use on PVC pipe and fittings up to 4". Low VOC. 32° to 110°F application. Clear. ■ NSF, IAPMO, ASTM STANDARDS

G3430655 8oz **\$4.39**  
G2486425 16oz **\$5.99**  
G2131227 32oz **\$9.99**



**EZ WELD Heavy-Duty PVC Cement**

For use on PVC schedule 40 and 80 pipes and fittings up to 8". Low VOC. 32° to 110°F application. Gray. ■ NSF, IAPMO, ASTM STANDARDS

G0399147 8oz **\$3.99**  
G2087757 16oz **\$6.99**  
G0968362 32oz **\$12.99**



**AST-PUT Plumber's Putty**

Plumber's putty can be used in setting bowls, faucets, rims and strainers. Formula is stainless, long lasting, and has a smooth and uniform consistency. Will not crack, harden or shrink. Not for use in marble installations. Tan. 5lb tub. ■ MILITARY STANDARDS

G4582444 **\$8.72**



**EZ WELD CPVC Cement**

For use with CPVC pipes and fittings up to 2". Low VOC. 32° to 110°F application. Yellow. ■ NSF, UPC, ASTM STANDARDS

G1541477 8oz **\$4.85**  
G1025053 16oz **\$8.17**  
G1187444 32oz **\$14.06**



**EZ WELD ABS Cement**

For use with ABS pipe and fittings up to 6". Low VOC. 32° to 110°F application. Black. ■ NSF, UPC, ASTM STANDARDS

G1581343 8oz **\$4.19**  
G3449923 16oz **\$7.06**  
G1728772 32oz **\$9.80**





9  
PIECE

**ROTHENBERGER Ratchet Threader Kit**

Deluxe plumber's kit is for use on black pipe, galvanized pipe, IMC and heavy-wall conduit up to 1". Hand-held tools with drop-forged construction come in a plastic case.

G0314702 kit **\$306.45**  
kit includes: 1 1/4" ratchet, quick-change die heads (1/2", 3/4", 1"), 1 1/4" steel pipe cutter, 10" water pump pliers, 14" heavy-duty pipe wrench, pipe tape



**ANDERSON FITTINGS Snip Tube Cutter**

Tube Cutter cuts through most resilient plastic tubing. For use on PVC, braided PVC, nylon, polyethylene and polyurethane tubing. Up to 3/8" OD capacity.

G2170621 cutter **\$7.99**  
G2256737 replacement blades 10-pack **\$17.96**



**DAWN Snip Tube Cutter**

Kwikcut hose, tubing and plastic pipe cutter features a high-carbon PTFE-coated steel blade that cuts through plastic tubing, rubber nonwire-reinforced hose and Schedule 40 PVC pipe. Up to 1" OD capacity. 8 1/2" overall length.

G2323081 cutter **\$11.79**  
G2998983 replacement blade **\$6.48**



**RIDGID Tube Cutter**

Enclosed feed screw cutter features grooved rolls for close-to-flare cuts and a fold-away reamer. For use on copper, brass or aluminum tubing and thin wall conduit. Handle features large knob with spare cutting wheel storage space—includes spare cutting wheel. Zinc alloy body. 1/8" to 1 1/8" OD capacity. 4 7/8" overall length.

G0862242 cutter **\$26.24**  
G2012656 aluminum/copper blade **\$7.91**  
G1772346 steel/stainless steel blade **\$9.07**



**RIDGID Stainless Steel Tubing Cutter**

Quick-acting tube cutter is for use on stainless steel tubing. Cutter features six individual bearings in hub that replace standard rollers, large ergonomic knurled knob handle, aluminum body and steel blade. 1/4" to 1 3/8" OD capacity. 6 1/4" overall length.

G2163506 cutter **\$48.24**  
G3358756 replacement blades 2-pack **\$14.96**



**GRIP-ON Chain Pipe Cutter**

Chain-type pipe cutter features heavy-duty wheels for cutting welded and seamless pipe up to 1/2" thick. For use on galvanized and stainless steel, copper, PVC and aluminum. Ratchet action allows operation in confined spaces. Cutter features one-handed release and locking handle with adjustment screw. Up to 4 1/2" OD cutting capacity. 12" length.

G0329165 **\$112.99**



**RIDGID Bench Yoke Vise**

Bench yoke vise is for use with 1/8" to 2" pipe. Vise features iron yoke and base, steel alloy jaws, pipe rest and bender.

G2858511 **\$151.50**

6  
PIECE



**RIDGID Pipe Extractor Set**

Pipe extractor set features markings to show which drill size to be used. Ideal for removing broken thread ends of pipe, pipe plugs and fittings. Steel construction with straight flute.

G0466882 6-piece set **\$69.47**  
set includes: 3/8", 1/4", 3/8", 1/2", 3/4", 1" extractors

**SUPERIOR TOOL Compression Sleeve Puller**

Puller removes compression sleeves without damaging pipes. Screws directly into compression nut for removal. Steel construction. For 1/2" pipe.

G0953994 **\$11.29**



**VALUE BRAND 4-Way Water Key**

Steel water key is for use on 1/4", 3/8", 1/2", 5/8" and 1 1/2" square stems. Includes vinyl storage pouch.

G0768521 **\$3.69**



**SUPERIOR TOOL Tub Drain Wrench**

Tub drain wrench can be used to install and remove bath tub drains with or without cross bars. Both ends of the tool can be used with 3/8" or 1/2" ratchet. Zinc construction.

G2785246 **\$12.58**








**PROTO Pipe Wrench**

Straight pipe wrench features an I-beam forged steel handle and jaw, providing outstanding strength. Full floating-hook jaw provides instant grip and easy release. Large knurl and power threads provide fast, positive jaw adjustment. 24" overall length. 4" jaw capacity. ■ FEDERAL STANDARDS  
G2521671 **\$61.99**

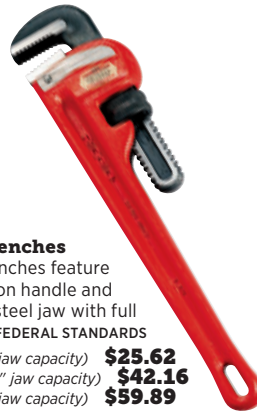

**RIDGID Pipe Wrenches**

Straight pipe wrenches feature an I-beam cast-iron handle and standard forged steel jaw with full floating hook. ■ FEDERAL STANDARDS  
G3454997 14" (2" jaw capacity) **\$25.62**  
G1625312 18" (2½" jaw capacity) **\$42.16**  
G1386393 24" (3" jaw capacity) **\$59.89**



**FACOM Monkey Wrenches**

Wrenches feature slip-resistant hardened steel handle and smooth hardened steel jaw with worm gear. ■ FEDERAL STANDARDS  
G5051575 9¾" (2¼" jaw capacity) **\$22.02**  
G4822632 11½" (2½" jaw capacity) **\$25.99**  
G4822867 14½" (3½" jaw capacity) **\$32.99**



**RIDGID Pipe Wrenches**

Straight pipe wrenches feature an I-beam aluminum handle and standard forged steel jaw with full floating hook. ■ FEDERAL STANDARDS  
G2415901 14" (2" jaw capacity) **\$55.21**  
G1458816 18" (2½" jaw capacity) **\$60.89**  
G3015801 24" (3" jaw capacity) **\$119.99**



**VALUE BRAND Pipe Wrench Set**

The straight pipe wrenches in this set feature an I-beam aluminum handle and spring-loaded hardened alloy steel jaw. ■ FEDERAL STANDARDS  
G2473606 2-piece set **\$27.40**  
set includes: 10" (1½" jaw capacity), 14" (2" jaw capacity),



**VALUE BRAND Offset Hex Pipe Wrench**

Provides better access to hard-to-reach places and features an I-beam cast-iron handle and smooth forged steel jaw. 9½" overall length. 2½" capacity.  
G2409933 **\$12.63**



**IRWIN VISE-GRIP Plumbing Wrench**

Straight pipe wrench features an ergonomic aluminum handle and narrow aluminum jaw. One-handed operation. 11" overall length. 2¼" jaw capacity. ■ FEDERAL STANDARDS  
G0419036 **\$31.51**



**AMPCO Non-Sparking Pipe Wrenches**

These straight pipe wrenches are non-sparking, non-magnetic and corrosion resistant. They feature an I-beam aluminum handle and aluminum bronze jaw. Beryllium free. ■ FEDERAL, GSA, MILITARY, ANSI, DIN, OSHA, DOE, NFPA, MSHA STANDARDS  
G0157351 24" (4¼" jaw capacity) **\$172.97**  
G0157376 36" (5¾" jaw capacity) **\$379.99**



**PROTO Chain Wrench**

Universal chain wrench with forged steel handle has deep milled teeth. 6,200 lb capacity. ⅞" to 4" pipe capacity. 16½" overall length.  
G3503482 **\$29.09**

**KLEIN TOOLS Grip-it Strap Wrenches**

Strap wrenches feature a steel I-beam handle with urethane strap. For use on polished pipe and fittings, plastic pipe and fittings, oil and water filters, glass pipe, PVC conduit, polished shafts, alternator belts, flywheels and propeller assemblies.

#	handle	strap	capacity	price
G3639474	12"	1" x 23"	1½" to 5"	<b>\$20.49</b>
G1790196	18"	1¾" x 34"	1½" to 8"	<b>\$42.15</b>



THIS GREAT LITTLE PUMP WORKS FASTER & WAY BETTER THAN A BUNCH OF BUCKETS!



**LITTLE GIANT Utility Pump**

Utility pump drains standing water in shallow areas such as basements, window wells, sumps, rooftops, construction sites and dump sites. Unit features a single-phase thermally protected motor, nonclog impeller and 1" NPT discharge with 3/4" garden hose adapter. Pumps down to 1/8". Converts to automatic sump pump operation with optional switches. Aluminum housing with 18' cord. 18 gpm @ 5' head. 1/2 HP. 115 V. 5 A. 4 5/16" w x 6 1/4" d x 7 3/4" h. ■ UL, CSA, CE STANDARDS  
G1203237 **\$79.99**

**MADISON Liquid Level Switch**

Encapsulated, dependable dry reed switch delivers more than 5 million switching cycles at rated electrical load. Features visual NO/NC operation indication. Used for alarm circuits that control motor starters, contactors, solenoids and relays. Polypropylene construction with 24" 22-gauge MTW coated leads, 1 5/8" stem and 1/2" NPT connection for vertical mounting. 240 V (max). 100 psi (max). 221°F (max). 1" w x 1" d x 2 1/4" h.



G2923024 **\$7.93**

**RULE Submersible Marine Pump**

Efficient compact pump has run-dry capability, is for use in fresh or salt water and includes a built-in switch. Stainless steel shaft material. Pump features silent vibrationless operation, ignition protection and rust/corrosion protection. Plastic housing with 3/4" outlet. 500 gph @ 0' head. 12 V. 1.9 A. 2 3/8" w x 2 3/8" d x 4" h.



G1723985 **\$51.15**

**DAYTON Sensor Utility Pump**

Sensor utility pump drains standing water in shallow areas such as basements, window wells, sumps, rooftops, construction sites and dump sites. Pumps water down to at least 3/8". Amp sensor turns off the pump if no water is present, preventing a dry run. Pump cycles every 3 minutes and shuts down after 5 seconds if unit senses it is not pumping water. Unit features a single-phase thermally protected motor, nonclog impeller and 1 1/4" NPT discharge with 3/4" garden hose adapter. Plastic housing with 9' cord. 30 gpm @ 5' head. 1/4 HP. 115 V. 6" diameter. 11 3/4" height. ■ UL, CSA STANDARDS  
G2824297 **\$131.97**



**LITTLE GIANT Compact Submersible Pump**

Compact submersible centrifugal pump is great for use with fountains, statues, water gardens, coolant systems, evaporative coolers, wet saws and air conditioners. Epoxy-coated, die-cast pump housing offers added protection and oil-filled motor provides extra cooling and durability. For use with nonflammable liquids compatible with pump component materials. Unit features an aluminum pump, nylon impeller, polypropylene screen and 6' cord. 115 V. ■ UL STANDARDS



**Hooded Inlet**  
Nitrile seal.

300 gph @ 1' head. 1/40 HP. 1.7 A. 3 1/2" w x 5 1/2" d x 4 1/2" h.  
G1548897 **\$76.64**

**1/2" FNPT Inlet**  
Viton seal.  
500 gph @ 1' head.  
1/16 HP. 3.2 A.  
4 1/2" w x 7" d x 5 1/2" h.  
G2522615 **\$99.99**



**LITTLE GIANT Condensate Pump**

Condensate pump can be used to remove condensation in high-efficiency gas furnaces, air conditioning units and in other no-gravity applications. Medium-reservoir (1/2 gal) pump has a high-impact polymer base, stainless steel shaft and ABS plastic tank cover and switch housing. Feature include a fan-cooled motor, integral sump tank, control float, check valve, safety switch, 3/8" barb discharge, and 6' cord. 1/20 HP. 120 V. 1 A. 5" w x 10 1/2" d x 7" h.



G3466881 **\$43.86**

**LITTLE GIANT Low-Profile Condensate Pump**

The compact design allows use in limited-space installations where the incoming drain line is too low for medium-reservoir units. Use to remove condensation in high-efficiency gas furnaces, air conditioning units and in other no-gravity applications. Features thermal overload protection, 1 qt tank and 3/8" barb discharge. Includes safety switch, 6' cord, nylon sump pan, control float and filter screen. 1/20 HP. 120 V. 1.5 A. 5" w x 12" d x 5" h.



G1138593 **\$44.69**



**DAYTON Self-Priming Utility Pump**

Utility pump is designed for water transfer applications—emptying or filling tanks, lawn sprinkling and drawing water from lakes and ponds. Unit features permanently lubricated shielded ball bearings, external brush holders and a plastic impeller. Cast-iron housing with a mechanical carbon ceramic Buna N seal features 3/4" NPT inlet/outlet, rubber feet and a 10' cord. Includes 3/4" garden hose adapter and an inlet strainer. 11.6 gpm @ 5' head. 1/2 HP. 115 V. 8 A. 5 3/4" w x 9 1/2" d x 8" h.  
G0570123 **\$184.47**

**DAYTON Compact Utility Pump**

Compact flexible impeller pump can be used to empty water beds, drain water heaters or aquariums, pump out basements, transfer water to RV, pump boat bilges, pump out stock tanks or water transfer. Pump features a thermally protected motor, stainless steel shaft, Buna N impeller, bronze sleeve bearings, 3/4" garden hose inlet/outlet and a carrying handle. For use with nonflammable liquids. 5.6 gpm @ 5' head. 1/10 HP. 115 V. 1.6 A. 4" w x 6 3/4" d x 4 1/2" h.  
G0534021 **\$96.45**





#### LEVELGUARD

##### Electric Sump Pump Switch

Tether pump switch automatically controls pumps in sump/sewage and nonpotable water applications. Solid-state design has no moving parts to hang up or wear, as in traditional mechanical pump switches. For use with 120 V single-phase ½ HP and under submersible sump pumps. Includes normally open solid-state tether switch, zip ties (5) and instruction booklet. ABS plastic body with 9' cord. Vertical mount. 115 V. 12 A (max). ■UL STANDARDS  
G4555932 **\$98.99**

#### LITTLE GIANT

##### Indoor High-Water Alarm

Unit features audible/visual alarms and operates on 9VDC battery backup if power fails. Includes tether switch with auto reset and 6' cord. Rated for indoor use. 115 VAC. 87 db @ 10'.  
G1712803 **\$84.85**



#### WATTS Backflow Preventer

Dual-check valve features atmospheric vent, integral strainer and durable rubber discs. ¾" FNPT union connection. Bronze construction. 175 psi (max). 33 to 250°F.  
■ASSE, CSA STANDARDS  
G0291645 **\$39.99**



#### ZOELLER Full Flow Check Valves

Check valves prevent backflow of sump disposal lines, wastewater lines, sewage lift stations or ejector systems. PVC construction with stainless steel clamps, screws and hinges. Slip x slip connection. 4.3 psi @ 130°F.

G0359283 1¼" or 1½" **\$7.90**  
G3150472 2" **\$17.23**



#### ZOELLER Simplex Sewage System


Sewage pump system lifts wastewater up to existing sewer lines in residential, commercial and small industrial applications. Automatic pumps include 2-pole vertical float switch, nonclog vortex impeller, check valve and polyethylene cover. 33 gal polyethylene basin features 4" inlet and 2" outlet. 2" diameter solids (max). ¼ HP. 115 V. 18" w x 18" d x 30" h. Requires some assembly.

G0448953 **\$499.99**

#### LITTLE GIANT

##### Sump Pump Hose

Polyethylene sump pump hose is 1¼" diameter and includes 1¼" and 1½" adaptors. 24' length.  
G3746285 **\$6.83**



#### ZOELLER Sump Pump Stand

Pump stand lifts up sump and effluent pumps and is for use in septic tanks and other basins. Stand height can be adjusted from 2" to 24". Includes hardware to attach pump. Plastic construction. 7½" w x 12½" d x 21½" h.  
G1286485 **\$11.18**

#### ZOELLER

##### Submersible Sewage Pump

Submersible sewage pumps handle solids-laden wastewater in dewatering, effluent waste handling, onsite wastewater treatment and septic or municipal sewer system pumping applications. Thermal overload protection. Cast-iron housing with polypropylene base features polypropylene impeller, 2" NPT discharge and 15' cord. 2½" diameter solids (max). Vertical switch. 12½" on point/4½" off point. 110 gpm @ 5' head. ¼ HP. 115 V. 9.4 A. 14¼" height.  
G2973031 **\$253.20**



## SUBMERSIBLE SUMP PUMPS

Submersible sump pumps drain flooded basements, window wells, construction sites and swimming pools. Pumps feature a single-phase permanently lubricated motor with nonclog vortex impeller.



#### LITTLE GIANT Manual Submersible Sump Pump

Pump features cast-iron housing with polypropylene base, 1½" NPT discharge, 3-conductor cord and convenient carrying handle. ½" diameter solids (max). 42 gpm @ 10' head. ½ HP. 115 V. 9¾" height.  
G1753193 **\$126.30**

#### DAYTON Manual Submersible Sump Pump

Efficient PSC motors have thermal overload protection. Commercial-grade pumps offer high performance and a longer cord. Aluminum housing with cast-iron base, 2" NPT discharge and convenient carrying handle. ½ HP. 115 V. 4.8 A. 75 gpm @ 5' head. 10" diameter. 16¼" height.  
G0684817 **\$208.12**



#### ZOELLER Submersible Sump Pump

Screenless suction inlet enables pumps to be used in areas where conventional sump pumps would clog or freeze up due to light debris accumulation. Dependable, hermetically sealed motors assure long service life. Cast-iron housing with 1½" NPT discharge and convenient carrying handle. ½" diameter solids (max). Vertical switch. 115 V.

##### ¾ HP Pump

Polypropylene base. 9' cord. 7¼" on point/3" off point. 34 gpm @ 10' head. 115 V. 9.6 A. 10½" height.  
G0749481 **\$122.14**

##### ½ HP Pump

Cast-iron base. 15' cord. 9½" on point/3" off point. 61 gpm @ 10' head. 115 V. 9.4 A. 12" height.  
G3343225 **\$189.70**



#### ZOELLER Sump Pump w/Battery Backup

Battery backup sump pump system provides reliable flood protection in the event of a power outage. Use in residential applications for both new-build and remodel situations. Cast-iron pump has polypropylene base, steel shaft, carbon ceramic seals, 1½" NPT discharge and 9' cord. Includes two pumps, monitoring controller/charger, battery box and check valve—battery sold separately. 2580 gph (1380 gph backup). ½ HP. 115 V. 9.6 A (8.4 A backup).  
G0982667 **\$397.80**





MORE THAN 400,000 ITEMS ONLINE



**ARISTON Point-of-Use Water Heater**  
Electric mini-tank water heaters are easy to use—simply plug into a standard wall outlet and set thermostat control. Heaters feature glass-lined tank with titanium inside, stainless steel heating element, factory installed T&P valves, 1/2" NPT water connections and a 30" cord. 6.8 gph recovery @ 90°F rise. 65° to 140°F. 120 VAC. 12.5 A. 1500 W. 14" w x 10 1/4" d x 14" h. ■ UL, CSA STANDARDS  
G2842156 2 1/2 gal **\$159.74**  
G3114273 4 gal **\$174.74**

**DIAPHRAGM PUMPS**

Automatic marine/RV water supply pumps are for intermittent use on boat or camper-trailer bilge or water systems.




**FLOJET Diaphragm Pump**  
Pump features automatic santoprene diaphragm with polypropylene body and 1/2" hose barb inlet/outlet. 12 VDC motor. Includes built-in bypass. 9' self-priming. 2.9 gpm @ 0' head. 50 psi (max). 6" w x 9" d x 4 3/4" h. ● CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS  
G1155113 **\$45.99**

**FLOJET Diaphragm Pump**  
Pump features automatic santoprene diaphragm with 3/8" FNPT inlet/outlet. 12 VDC motor with ball bearings. Not for potable water. Includes pressure switch and 11" lead wires (2). 6' self-priming. 2.3 gpm @ 0' head. 30 psi (max). 3 1/4" w x 8 1/8" d x 3 3/4" h.  
G3071512 **\$89.99**




**BOSCH Tankless Water Heater**  
Gas tankless water heater features a 4" hood, 1/2" gas connection and pilot ignition. Includes mounting bracket. 2.6 gpm @ 45°F rise. 1.3 gpm @ 90°F rise. 74,900 Btu input. 12 13/64" w x 8 1/2" d x 28 3/4" h. ● CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS  
G1219172 natural gas **\$389.99**  
G2630056 LP gas **\$389.99**



**WEBSTONE Tankless Water Heater Service Valves**  
Full-port, forged ball valves are actuated by a blowoutproof stem and feature PTFE seat and stem seal, high-flow hose drain, pressure relief outlet and an adjustable packing gland. Low-lead brass construction with vinyl-covered steel handle. 3/4" pipe size. 398 to 500 psi. 100° to 180°F.  
● CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS  
G5274053 **\$113.31**

**BELL & GOSSETT NBF Series Circulator Pump**

Maintenance-free wet rotor pump features DuraGlide bearing system which helps provide high starting torque for dependable seasonal startups. Self-cleaning particle shield protects shaft and bearings from start-up debris. Closed impeller design ensures efficient operation. Single-phase model is thermally protected. Ceramic shaft, carbon bearings and high-nickel stainless steel rotor. Bronze housing with flanged inlet/outlet. 10.7 gpm @ 1' head. 150 psi (max). 225°F (max). 1/2 HP. 115 V. 0.8 A.  
● CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS  
G1353256 **\$183.99**

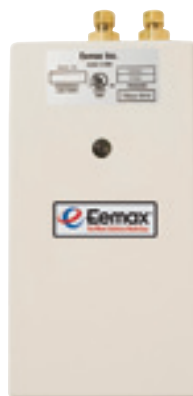

**EEMAX Tankless Water Heater**  
Single-phase electric tankless water heater features 3/8" compression water connections. 120 V. 25 A. 300 W. 0.5 gpm @ 41°F rise. 5" w x 3" d x 12" h.  
■ UL STANDARDS  
● CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS  
G4001401 **\$165.41**

**BELL & GOSSETT 100 Series Circulator Pump**

Hot water circulating pump features 3-piece construction with an oil-lubricated booster. Flexible spring-design coupler permits quiet operation. Sleeve bearings constantly circulate oil over bearing surfaces. Mechanical seal. Close centrifugal impeller/body tolerances minimize water slippage. Single-phase model is thermally protected. Cast-iron housing with flanged inlet/outlet. Not for potable water. Includes gaskets, bolts and oil. 32 gpm @ 1' head. 125 psi (max). 225°F (max). 1/2 HP. 115 V. 1.75 A.  
G0282931 **\$266.63**





**GENERAL Video Inspection System**

Video borescopes allow inspection of narrow cavities and around corners. System comes complete with a 3¼" waterproof camera probe and can be customized for specific applications with optional probes and other accessories. Flexible 12mm probe keeps its configured shape and two adjustable LEDs provide illumination. 2.4" color LCD screen. Includes mirror, magnet, pickup hook, carrying case and batteries. 4" to 8' observation depth.

G1986661 **\$94.84**

**GOULDS WATER TECHNOLOGY Constant Pressure Booster System**

Complete system includes everything needed to maintain constant pressure in domestic water applications. For indoor use—great in multibath homes, small apartments, condos, penthouses, residential irrigation systems and restaurants. Continuous-duty motor in ODP enclosure. Stainless steel housing with noryl impeller, 1¼" inlet and 1" outlet. System includes pump, motor, 2gal tank, tank tee, pressure gauge, pressure transducer, input/output wire, and variable speed/constant pressure controller. Check valves, unions, ball valves and breakers are NOT included. 15 to 80 psi liquid pressure. 10 psi boost (max). Single phase. 1HP. 115 V. 4.2A. 60/50 Hz. 1.15 service factor.

G1991026 **\$934.75**



**FILL-RITE Liquid Flowmeter**

Liquid flowmeter measures gasoline, diesel, kerosene or mineral spirits. Inlet and outlet ports can be rotated in 90° increments to ease installation. Flowmeter features corrosion-resistant aluminum housing, 1" NPT connections and mechanical register with large easy-to-read numbers. Resettable cumulative totalizer—100 gallons in ¼ increments. Master totalizer—100,000 gallons. 5 to 20 gpm. 50 psi (max). 6" w x 8" d x 6" h.

■ UL STANDARDS  
G2049451 **\$162.74**



**WATTS Pressure Regulator**

H506G Series pressure regulator features a lead-free brass body, ¾" FNPT inlet/outlet and pressure gauge. 10 to 60 psi adjustment range. 300 psi (max). ■ IAMPO STANDARDS  
● CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS  
G4743882 **\$79.99**



**SEAMETRICS Inline Flowmeter**

Inline flowmeter is for use in water applications. Unit features cast-bronze housing, ¾" NPT connections and 5-digit display. 0.22 to 22 gpm flow. 150 psi (max). 105°F (max). 12½" length.

G3464011 **\$155.99**



**FILL-RITE Hand Transfer Pump**

Piston-action, hand-operated drum pump is compact and ideal for use with gasoline, diesel fuel, light oil and kerosene. Compact, dual-action pump delivers up to 20 gallons per 100 strokes. Dual-action reversible flow with 1" NPT inlet and ¾" FNPT outlet. Includes adjustable suction tube, 2" bung adapter, ⅝" x 8' hose and nonsparking nozzle. Buna nitrile seal. 1500SSU (max).

G1117383 **\$129.99**



**FILL-RITE Rotary Transfer Pump**

Rotary-crank transfer drum pump is ideal for use with gasoline, diesel, oils up to SAE 40, antifreeze and kerosene. Delivers up to 10 gallons per 100 revolutions. Cast-iron pumps feature 3-vane construction with 1" NPT inlet and ¾" FNPT outlet. Includes 1" NPT telescoping steel suction pipe, 2" bung adapter, ⅝" x 8' hose and nonsparking nozzle. Built-in check valve and strainer. Buna nitrile seal. 1500SSU (max).

G2991834 **\$142.70**

**FILL-RITE Fuel Hoses**

Cut-, abrasion- and puncture-resistant nitrile hoses can be used with any electric or hand-operated fuel pump to safely transfer flammable petroleum liquids. Static wire transfers static buildup from the nozzle to the pump ground. Spring guards at each end help to extend hose life. 50 psi (max). -30° to 140°F.

G2858527 ¾" NPT inlet/outlet (12' length) **\$30.09**  
G1628067 1" NPT inlet/outlet (14' length) **\$37.42**





**BEMIS Heavy-Duty Toilet Seats**

Commercial plastic toilet seats feature STA-TITE system that cuts installation time and prevents toilet seat loosening—excellent for high-traffic areas. Chemical-resistant injection-molded seats clean easily and resist scratches and fading. Stainless steel mounting hardware. Large, color-matched, molded-in bumpers. Open front. 14¼" width. ■ **FEDERAL STANDARDS**

- G3008774 round (16½" bolt to front) **\$18.53**
- G0820023 elongated (18½" bolt to front) **\$17.99**



**FLUIDMASTER Tank Levers**

Toilet tank levers fit most toilets.

- G2322905 standard **\$3.89**
- G3140943 euro **\$5.99**

**FLUIDMASTER Toilet Repair Kit**

Toilet repair kit fits most toilets.

■ **IAPMO, ASSE, CSA STANDARDS**

- G2929972 kit **\$17.59**
- kit includes: fill valve, flush valve, bowl gasket and bolts, tank lever



**HARVEY Toilet Bowl Gasket**

Extra thick wax ring toilet seal forms a gas-, odor- and water-tight seal. Fits 3" and 4" waste lines. Petroleum wax construction with polyethylene flange. ■ **FEDERAL STANDARDS**

- G2029815 **\$1.96**



**SLOAN Flush Valve**

Exposed valves have free-spinning, vandal-resistant stop caps. Integral vacuum breaker helps prevent back siphoning. Manual flush valve features a diaphragm valve design with non-hold oscillating handle. Chrome-plated finish. 1" inlet. 1½" spud coupling. 1½" rough-in. 3.5 gpf.

- **ASSE, ANSI, CSA, ADA STANDARDS**
- G3433771 **\$116.28**

**SLOAN Vacuum Breaker Kit**

Manual flushometer vacuum breaker kit is for use with Regal flush valves.

- G3478194 **\$2.03**



**SLOAN Flushometer Rebuilding Kits**

Manual flushometer rebuilding kits are for use with Regal flush valves.

- G2642473 toilet (3.5 gpf)
- G3230114 toilet (4.5 gpf)
- G3199052 urinal (1.5 gpf)
- each **\$8.64**



GRAVITY-FED TOILETS

Viper toilet is designed around the proprietary Gerber HP2 flushing system, with a large 2" flush valve, fully glazed trapway and dual-feed siphon-jet bowl. Independently tested to remove 600 to 750 g of solid waste. Large trapways provide efficient waste removal. Expanded water surface areas keep bowls cleaner. Toilets are constructed of white vitreous china. Toilet seats sold separately.

**GERBER Gravity-Flush Toilet Bowl**

Round bowl. Floor mount. 10" x 8" water surface area. 1.6 gpf. 15" w x 27½" d x 15" h.

- G0865873 **\$79.99**



**GERBER Gravity-Flush Toilet Tank**

12" rough-in. ¾" ballcock connection. 1.6 gpf. 18½" w x 9½" d x 13½" h.

- G1622354 **\$83.79**

PRESSURE-ASSIST TOILETS

Ultra Flush pressure-assist toilet features a unique trapway design which makes these toilets ideal for high-traffic areas. High-efficiency toilet (HET) uses only 1.1 gallon per flush and is EPA WaterSense certified. Floor-mount toilets compress air with water in the tank to create a push that effectively cleans the bowl. Toilets are constructed of white vitreous china. Toilet seats sold separately.

**GERBER Pressure-Assist Toilet Bowl**

Elongated bowl. Floor mount. 12½" x 10½" water surface area. 1.6 gpf. 14½" w x 30" d x 14½" h.

CONTRIBUTES TO REDUCING WATER CONSUMPTION

- G3162153 **\$135.19**



**GERBER Pressure-Assist Toilet Tank**

12" rough-in. ¾" ballcock connection. 1.1 gpf. 20½" w x 8¾" d x 13¾" h. USES 1.28 GPF OR LESS

- G1735273 **\$149.99**





**AMERICAN STANDARD Urinal**  
Low-consumption with a powerful flushing action

for efficient cleaning. Includes wall hanger and 3/4" top inlet spud. Flush valve sold separately. White vitreous china. 1gpf. 12 3/4" w x 12 3/4" d x 18" h.

■ ASME STANDARDS  
G2122766 **\$121.62**

**NO-FLUSH URINALS**

Efficient systems conserve up to 40,000 gallons of water per unit per year. Cartridge system collects uric sediments and allows remaining liquid to flow through drain—good for up to 7,000 uses. Biodegradable sealant liquid eliminates odors.



**SLOAN Waterfree Urinal**

Urinal features touch-free operation and install to standard 2" drain line. Includes wall hanging brackets and cartridge (1). White vitreous china. 19 1/4" w x 14 3/8" d x 26 1/4" h. ■ ADA STANDARDS

✓ WATERLESS  
G1042273 **\$353.50**



**SLOAN Waterfree Urinal Cartridge Kit**

Vandal-resistant cartridge reduces airborne bacteria and requires only minimal care and cleaning. For use with Sloan Waterfree Urinal. Recycled ABS construction. 7,000 uses.

✓ WATERLESS  
G0611186 kit **\$40.78**  
kit includes: cartridge, sealant package, installation/removal key, protective glove, disposal bag



**SLOAN Waterfree Urinal Cleaner Starter Kit**

For use with Sloan Waterfree Urinal.

G0451622 kit **\$16.71**  
kit includes: 32 oz trigger spray bottle, green clean concentrate



**ZURN INDUSTRIES Battery Operated Retrofit Kit**

Flushometer retrofit kit converts manual toilets or urinals to automatic. Side-mount unit installs without shutting off water. For use with Zurn AquaVantage, Aquaflush Plus, Aquaflush, Metroflush, Sloan Royal, Regal and Crown flushometers. Unit features an adjustable sensor range and 24-hour courtesy flush option. Includes installation tools and C batteries (4). Metal cover with chrome finish. 3.5/1.6 gpf. ■ ANSI, ASSE, IAPMO/UPC, CSA, ETL STANDARDS

G2235493 **\$156.00**



**SLOAN Battery Operated Retrofit Kit**

Flushometer retrofit kit converts manual toilets or urinals to automatic. Side-mount unit installs without shutting off water. Unit features an 8" to 54" adjustable sensor range and 24-hour courtesy flush option. Includes installation tools. Metal cover. 15 to 100 psi.

G2095877 **\$142.99**

**CLR Septic Tank Treatment**

Ready-to-use septic tank treatment is used for septic and drain lines. Environmentally safe, pour-and-go septic cleaner and maintainer biodegrades grease and organic matter.

✓ EPA DESIGN FOR THE ENVIRONMENT  
G2825024 28 oz bottle **\$7.99**  
G1582682 1 gal jug **\$34.49**



**COBRA Aero Plunger**

Commercial-grade industrial plunger features a plastic handle and plunger. For use with most toilets and household drains. 7" cup diameter. 12" handle length.

G1467051 **\$5.99**



**ROEBIC LABORATORIES Root Killer**

Odorless root killer is for use with sewer or septic tanks. 2lb bottle.

G3012292 **\$17.19**

**CLR Pressurized Drain Opener**

Ready-to-use formula clears clogs up to 50' down. 4.5 oz aerosol.

G2785912 kit **\$19.99**  
G0385393 refill **\$14.99**



**VALUE BRAND Force Cup Plunger**

Commercial-grade plunger features a wood handle and durable rubber plunger. 6" cup diameter. 21" handle length.

G3183171 **\$6.49**






**CHICAGO FAUCETS Utility Sink Faucet**

Wall-mount service faucet features two lever handles with a vacuum breaker. Cast-brass construction with chrome finish. Includes 3/4" hose outlet, pail hook and wall bracket. 7 5/8" to 8 3/8" adjustable mounting centers. 5 3/4" standard spout. 1/2" FNPT connection. 12 gpm.

■ ADA STANDARDS  
G1339326 **\$91.99**



**VALUE BRAND Laundry Faucet**

Faucet features a pull-out spout and two round knobs. Chrome finish. 1/2" MIPS connection. 4" mounting centers. 2.2 gpm. 8 7/8" spout length.

G1873322 **\$99.99**



**MATCO-NORCA**

**Quarter-Turn Water Supply Stops**

Quarter-turn stops feature brass construction with chrome-plated finish and zinc handle. 125 psi (max). 40° to 180°F.

■ IAPMO, UPC, SA STANDARDS ◆ CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS

- G3209193 3/8" comp inlet / 1/2" FNPT outlet **\$4.45**
- G2644451 3/8" FNPT inlet / 3/8" comp outlet **\$4.45**
- G1412512 1/2" sweat inlet / 3/8" comp outlet **\$4.55**



**MUSTEE Utility Sink**

Floor-mount sink features thermoplastic construction with two faucet mounting holes 4" OC, 1 1/2" drain opening, heavy-gauge metal legs and includes adjustable leg levers. 13" deep bowl. 20" w x 24" d x 34" h.

■ IAPMO, ANSI, CSA STANDARDS  
G3356062 **\$46.16**



**MUSTEE Laundry Tub**

Wall-mount sink features thermoplastic construction with two faucet mounting holes and includes heavy-gauge steel mounting bracket and hardware. 20" w x 24" d x 14 3/8" h bowl.

■ IAPMO, ANSI, CSA STANDARDS  
G0357497 **\$63.76**



**VALUE BRAND Water Connectors**

Flexible, corrosion-resistant connectors install without tools, washers, rings, inserts or sleeves—no cutting required. For use in hot and cold water applications. Braided stainless steel construction with triple-reinforced PVC inner core and brass nuts. 125 psi (max). 40° to 180°F. 1/2" OD.

■ IAPMO, NSF STANDARDS ◆ CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS

◆ # inlet outlet length price

- G4135126 3/8" comp 3/8" comp 12" **\$2.78**
- G4229443 3/8" comp 3/8" comp 20" **\$3.38**
- G3984346 3/8" comp 1/2" FIP 12" **\$3.07**
- G4097834 3/8" comp 1/2" FIP 16" **\$3.17**
- G3989106 3/8" comp 1/2" FIP 20" **\$3.67**
- G3948567 1/2" FIP 1/2" FIP 20" **\$4.03**

**MUSTEE Mop Sink**

Floor-mount mop sink features 1-piece impact-resistant Durastone structural fiberglass basin with molded drain, seal for 3" PVC, ABS or iron pipe and stainless steel strainer. 10" deep bowl. 20" w x 24" d x 10" h overall.

■ IAPMO, ANSI, CSA STANDARDS  
G1548023 **\$135.99**



**GERBER Service Sink**

Enamel-coated wall-hung sink has a stainless steel rim guard for extra durability. Cast-iron construction with two faucet mounting holes 3" OC and 9" backsplash. 14 1/8" w x 18 3/8" d x 10" h bowl. 18" w x 22" d x 20 1/4" h.

G2940287 **\$357.22**

**ELKAY Drop-In Stainless Steel Sinks**

Drop-in sinks are fully undercoated to protect against condensation and help maintain sink water temperature.

23-gauge stainless steel with satin finish.



**Single Bowl**

Bowl features two holes with 4" faucet mounting centers and a 3 1/2" drain opening. 10" w x 12" d x 5 1/2" h bowl. 15" w x 15" d x 5 1/2" h.

G0292363 **\$38.49**

**Double Bowl**

Bowl features four holes with 4" faucet mounting centers and a 3 1/2" drain opening. 14" w x 15 1/2" d x 6 1/8" h bowls. 33" w x 22" d x 6 1/8" h.

G2709007 **\$55.47**



**IN-SINK-ERATOR  
Badger Waste Disposer**

Waste disposer features a rugged galvanized steel grind chamber, fitting a 3½" outer diameter sink opening. Unit includes two 360° stainless steel swivel impellers, dishwasher drain connection, stainless steel sink flange and self-service wrench. Quiet Dura-Drive split-phase induction motor has permanently lubricated bearings and feature overload protection and manual reset. Quick-Lock mounting system for easy installation. Single-phase. ½HP. 120V. 6.7A. 26oz grinding capacity. 1½" drain connection. 11¾" overall height.  
G0340173 **\$74.93**



**DAYTON Low-Profile Hand Dryer**

Unit features an automatic activator with integral nozzle. Cast-aluminum cover with white epoxy enamel finish. 30-second dry time. 120/208/240V. 8/7/6 A. ■ ADA STANDARDS  
G2920802 **\$312.91**



**VALUE BRAND Wall-Mount Showerheads**

Showerheads fit standard ½" MIPS water supply and deliver 2.5 gallons per minute. Chrome-plated plastic construction.  
G1793766 single-spray head **\$4.59**  
G1889081 three-spray settings **\$11.99**

**IN-SINK-ERATOR  
Evolution Waste Disposer**

Food waste disposer with stainless steel grind components ensures dependable performance. Unit features multigrind shredder and sound-reducing insulation. Jam-Sensor circuit automatically increases motor torque up to 500%. Quiet Dura-Drive split-phase induction motor has permanently lubricated bearings and feature overload protection and manual reset. Quick-Lock mounting system for easy installation. Disposer fits a 3½" outer diameter opening and includes sink baffle. Single-phase. 1HP. 120V. 10.2A. 40oz grinding capacity. 1½" drain connection. 13½" overall height.  
G2428063 **\$373.99**




**XLERATOR HAND DRYER Hand Dryer**

Industrial, high-speed and energy-efficient, this unit dries hands 3-times faster and uses 80% less energy. Unit features an automatic activator with fixed nozzle. Die-cast zinc cover with white chip-resistant epoxy finish. 10-second dry time. 115V. 12.5A. 1500W. ■ ADA, UL/CUL, CE STANDARDS  
✔ CONTRIBUTES TO REDUCING ENERGY CONSUMPTION  
G2071885 **\$440.00**

**VALUE BRAND  
Handheld Showerhead**

Showerhead fits standard ½" MIPS water supply and deliver 2.5 gallons per minute. Showerhead features three spray settings with massage. Brushed-nickel plastic construction with 59" hose includes tangle nut.  
G2165782 **\$39.99**

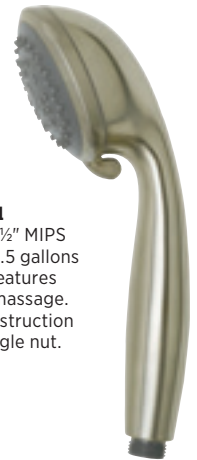

**ELKAY Water Coolers**

Premium-quality coolers have a waterway system with stainless steel tanks, copper components and lead-free materials. An easy-to-clean strainer traps particulates before they enter the cooler. Units feature permanently lubricated compressor and fan motor, refrigeration system dryer and a splash-resistant stainless steel, multilevel basin. Separate, easy-to-access sanitary controls. Preset temperature control only requires altitude adjustment. In-line flow regulator maintains constant stream height at line pressures of 20 to 105 psi. Delivers 50°F water temperature. Removable front panels allow easy access for maintenance. ¾" OD tubing inlet. 1¼" drain outlet. HFC134A refrigerant (CFC free). 115VAC.  
■ ANSI, NSF, ADA STANDARDS ● CERTIFIED FOR USE IN POTABLE WATER APPLICATIONS

**Indoor Wall-Mounted Cooler**

Mechanical push bar can activate a stream of water in the event of a power outage. ¼HP compressor. 4A full load. 8gph capacity. 18¼" w x 18½" d x 20¾" h.  
G1904052 **\$399.99**

**Indoor Free-Standing Cooler**

Push-button activated. ⅓HP compressor. 2.5A full load. 3gph capacity. 12" w x 12" d x 38" h.  
G3233151 **\$390.45**







# ELECTRICAL

NEED A BATTERY, SWITCH, PLUG OR GENERATOR?  
ZORO HAS EVERYTHING YOU NEED *AND* MORE!

It's not shocking...we are amped up about our electrical selection.  
We have over **45,000** electrical and lighting items available on our website.  
Whether you are an electrician, contractor, or homeowner—Zoro can definitely help you out with all of your electrical needs.



SWITCHES  
// page 42, 43



CIRCUIT BREAKERS  
// page 41



LIGHT BULBS  
// page 53



EXTENSION CORDS  
// page 49



PLUGS & CONNECTORS  
// page 45



## POPULAR BRANDS



FLASHLIGHTS  
// page 54



GENERATORS  
// page 51



BATTERIES  
// page 52



TIMERS  
// page 46



**COOPER BUSSMANN BBS Series  
Fast-Acting Supplemental Fuses**

Nonindicating, nonrejection, single-element fuses feature a 1<sup>3</sup>/<sub>32</sub>" x 1<sup>1</sup>/<sub>8</sub>" cylindrical fiberglass body. Functional equivalent to Ferraz Shawmut SBS. 600 VAC. ■ CE, UL, CSA STANDARDS

► MORE SIZES ONLINE

G0761993 1A **\$1.99**  
G2162027 5A **\$3.49**

**COOPER BUSSMANN SC Series  
Time-Delay Fuses**

Nonindicating, rejection dual-element fuses feature a cylindrical melamine body. Class G. Functional equivalent to Ferraz/Gould AG1 and Littlefuse SLC. ■ CE, UL, CSA STANDARDS

G1950882 10A (600VAC/170VDC) **\$3.67**  
G0250957 15A (600VAC/170VDC) **\$3.87**  
G1474496 20A (600VAC/170VDC) **\$4.15**  
G1984281 30A (480VAC/300VDC) **\$6.67**

**COOPER BUSSMANN FNM Series  
Time-Delay Supplementary Fuses**

Nonindicating, nonrejection, dual-element fuses feature a 1<sup>3</sup>/<sub>32</sub>" x 1<sup>1</sup>/<sub>2</sub>" cylindrical fiberglass body. Class CC. Functional equivalent to Ferraz/Gould TRM and Littlefuse FLM. 250 VAC. ■ CE, UL, CSA STANDARDS

► MORE SIZES ONLINE

G1871947 10A **\$2.98**  
G2251557 15A **\$3.19**  
G0701994 20A **\$3.45**  
G1141323 30A **\$3.52**

**MERSEN ATMR Series  
Fast-Acting Midget Fuses**

Nonindicating, rejection, single-element fuses feature a 1<sup>3</sup>/<sub>32</sub>" x 1<sup>1</sup>/<sub>2</sub>" cylindrical melamine body. Class CC. Functional equivalent to Bussman KTK-R. 600 VAC/600 VDC. ■ UL, CSA STANDARDS

► MORE SIZES ONLINE

G1292724 10A  
G2217451 15A  
G0959217 20A  
G0744046 30A  
each **\$5.89**

**COOPER BUSSMANN LP-CC Series  
Low-Peak Time-Delay Fuses**

Nonindicating, rejection, dual-element fuses feature a 1<sup>3</sup>/<sub>32</sub>" x 1<sup>1</sup>/<sub>2</sub>" cylindrical melamine body. Class CC. Functional equivalent to Ferraz ATDR. ■ CE, UL, CSA STANDARDS

► MORE SIZES ONLINE

G2960842 10A (600 VAC/150 VDC)  
G1886717 15A (600 VAC/150 VDC)  
G0686847 30A (600 VAC/300 VDC)  
each **\$8.97**



CIRCUITS WERE MADE TO BE BROKEN.

**SQUARE D Homeline Circuit Breakers**

Plug-in breakers are for use with Homeline load centers. Double-pole breakers use two spaces in your electric panel. Plug-in panelboard mount. Screw clamp terminals. Any phase connection. 120/240 VAC. 2" w x 2.98" d x 3.13" h. ■ UL, CSA STANDARDS

G1716915 15A G2581941 20A  
G0672411 30A G3329751 50A  
each **\$82.78**

**CARLING TECHNOLOGIES Thermal Circuit Breakers**

Compact, precision-design breakers have few moving parts—a cost-effective alternative to hydraulic/magnetic breakers. They offer extremely reliable circuit protection with high resistance against shock and vibration. Half-shell construction with a single-pole pushbutton switch. 3/8" collar mount. 1/4" tab terminal connection. 250 V. 50/60 Hz. -10° to 60°C operating temp. ■ UL, CSA, TUV STANDARDS ► MORE SIZES ONLINE

**CMB Series**  
0.55" w x 1.78" d x 1.15" h.

G2950367 5A **\$2.99**  
G2353443 10A **\$1.99**  
G2733552 15A **\$1.99**

**CLB Series**  
0.57" w x 2.31" d x 1.38" h.

G1364526 30A **\$1.79**

**COOPER BUSSMANN  
In-Line Fuse Holder**

Single-pole breakaway in-line fuse holders for 1<sup>3</sup>/<sub>32</sub>" x 1<sup>1</sup>/<sub>2</sub>" midget fuses. Typically used with BAF, DCM, FNM, FNQ and KTK fuse types. 600 V (max). 30 AAC. #12 to #8 wire size. ■ UL, CSA STANDARDS

► MORE SIZES ONLINE

G1222295 **\$13.59**

**COOPER BUSSMANN Fusetron  
Time-Delay Fuses**

Nonindicating, rejection, dual-element fuses feature a cylindrical fiberglass body. Class RK5. ■ CE, UL, CSA STANDARDS

► MORE SIZES ONLINE

**FRN-R Series**  
Functional equivalent to Ferraz/  
Gould TR and Littlefuse FLNR.  
250 VAC/125 VDC.

G1684304 30A (1<sup>3</sup>/<sub>16</sub>" x 2") **\$2.44**

**FRS-R Series**  
Functional equivalent to Ferraz/Gould TRS  
and Littlefuse FLSR. 600 VAC/300 VDC.

G2396265 20A (1<sup>3</sup>/<sub>16</sub>" x 5") **\$9.49**  
G1203185 30A (1<sup>3</sup>/<sub>16</sub>" x 5") **\$9.54**  
G1633283 60A (1<sup>3</sup>/<sub>16</sub>" x 5<sup>1</sup>/<sub>2</sub>") **\$11.21**

**VALUE BRAND  
Coiled Power Supply Cords**

Stranded, electrical-grade copper conductors and molded-on 90° male plugs. 10' SJT cord with PVC jacket features a bare connector end. 125 V. 13 A (max). ■ UL/CUL STANDARDS

**NEMA 1-15P Plug**  
16/2 cord. 0.32" OD.  
G0418862 **\$9.90**

**NEMA 5-15P Plug**  
16/3 cord. 0.34" OD.  
G3044982 **\$14.39**

**VALUE BRAND  
Specialty Power Supply Cord**

Stranded, electrical-grade copper conductors and molded-on male plugs. 8' SJO cord with rubber jacket. 250 V. 15 A (max). 14/3 cord. 0.375" OD. ■ UL/CUL, OSHA STANDARDS

G1165482 **\$10.91**



## PANEL-MOUNT SWITCHES

Applications include electric motors, appliances, power tools, light fixtures and instruments.

**CARLING TECHNOLOGIES Toggle Switches**

Panel-mount toggle switches with 1/2" diameter mounting hole.

**SPST Contact with Tab Terminals**

Offers an "on/off" function. 1/4" quick-connect tab terminal connections (2). 3/4 HP. 15 A @ 125 VAC. 10 A @ 250 VAC. 0.68" actuator.

G3266566 **\$1.99**

**SPST Contact with Screw Terminals**

Offers an "on/off" function. Screw terminal connections (2). Includes hex and ring nut. 3/4 HP. 15 A @ 125 VAC. 10 A @ 250 VAC. 0.68" actuator.

G2195715 **\$2.99**

**SPDT Contact with Screw Terminals**

Offers a "momentary on/off/momentary on" function. Screw terminal connections (3). 3/4 HP. 15 A @ 125 VAC. 10 A @ 250 VAC. 0.68" actuator.

G2945171 **\$6.11**

**DPST Contact with Screw Terminals**

Offers an "on/off" function. Screw terminal connections (4). 1 HP. 20 A @ 125 VAC. 10 A @ 250 VAC. 0.687" bat-style actuator.

G1925822 **\$10.29**

**DPDT Contact with Tab Terminals**

Offers an "on/off/on" function. 1/4" quick-connect tab terminal connections (6). 3/4 HP. 15 A @ 125 VAC. 10 A @ 250 VAC. 0.687" bat-style actuator.

G2085072 **\$5.37**

**VALUE BRAND Toggle Switch Boot**

For use with Value Brand panel-mount toggle switches. Black rubber construction with M12 thread. 0.433" inside diameter. 3/8" w x 5/8" d x 1" h.

G1115432 5-pack **\$1.02**

**CARLING TECHNOLOGIES Rotary Switch**

Offers an "on/off" function.

Panel mount with 3/8" diameter mounting hole. 6" wire lead terminal connections (2). SPST contact. 3 A @ 125 VAC. 5 A @ 12 VDC.

G1126885 **\$2.99**

**CARLING TECHNOLOGIES Miniature Push-Button Switch**

Offers an "off/momentary on" function.

Panel mount with 1/2" diameter mounting hole. Screw terminal connections (2). SPST contact. 15 A @ 125 VAC. 10 A @ 250 VAC.

G2435727 **\$6.49**

**CARLING TECHNOLOGIES Lighted Rocker Switches**

Black body with lighted red switch. Panel mount with 0.83" x 1.45" mounting hole. 3/4 HP. 20 A @ 120 VDC. ■ UL, CSA STANDARDS

**SPST Contact**

Offers an "on/off" function. 1/4" quick-connect tab terminal connections (3).

G3896216 **\$6.09**

**SPDT Contact**

Offers an "on/off/on" function. 1/4" quick-connect tab terminal connections (4).

G4222066 **\$6.99**

**DPDT Contact**

Offers an "on/off/on" function. 1/4" quick-connect tab terminal connections (6).

G4219747 **\$8.79**

**CARLING TECHNOLOGIES Lighted Rocker Switch**

Offers an "on/off" function. Black body with red neon light. Panel mount with 0.83" x 1.45" mounting hole. 1/4" quick-connect tab terminal connections (3). SPST contact. 3/4 HP. 15 A @ 125 VAC. 10 A @ 250 VAC.

G2692514 **\$4.79**

**TELEMECANIQUE Reflective Tape**


Super reflective corner cube tape is for use with polarized photo sensors. Paper/adhesive backing. 2000X luminance factor. 1" x 3" roll.

G0821037 **\$21.99**

**TELEMECANIQUE Sensor Reflector**

Standard reflector is for use with retroreflective photoelectric sensors. Acrylic lens with center mounting hole. 4000X luminance factor. 3" diameter.

G1144071 **\$3.11**

**OMRON Z Series Snap-Action Switches**

High-precision, general-purpose switches are functionally interchangeable with Unimax 2HB series. 1.03" mounting centers. Screw terminal connections. SPDT contact. 125/250/480 VAC. 15 A. ■ UL, CSA STANDARDS

G2301923 panel mount plunger **\$9.85**  
G1328031 short hinge roller lever **\$4.59**  
G0895903 hinge roller lever **\$4.69**

**HONEYWELL MICRO SWITCH BE Series Snap-Action Switch**

Suitable for building controls and fire suppression systems, communication systems, machine tools, door latching mechanisms and most simple on-and-off actions. Rugged construction, low operating force and differential travel with momentary or mechanical contact action. Wide operating characteristics and enhanced mechanical life up to 20,000,000 cycles. Elongated mounting holes with 1" mounting centers. Screw terminal connections. SPDT contact. Overtravel plunger actuator. 125/250/480 VAC. 25 A. ■ UL, CSA STANDARDS

G1893071 **\$18.99**

**TORK Photocontrols**

Specification-grade contactors feature heavy-duty die-cast aluminum housing and base that is gasketed for maximum weather protection. Ideal for parking lot and building perimeter lighting and controlling outdoor signage lighting. On-at-dusk, off-at-dawn settings. Fixed, flush mount with 1/2" conduit. Includes color coded leads. 120 VAC. 15 A ballast (max). 2,000 W (max). ■ UL, CSA STANDARDS

G1188862 **\$9.69**

**INTERMATIC Photocontrols**

Designed for outdoor use. Commercial-grade thermal photocontrols feature a built-in delay to prevent false cycling due to car headlights, lightning, etc. Cadmium sulfide photocell. Sonic-welded polycarbonate case and lens. Dusk-to-dawn setting. 120 VAC. 8.3 A ballast (max). 1,800 W (max). ■ UL, CSA STANDARDS

**Threaded Stem w/Swivel**

Mounts with 1/2" male pipe thread.

G1511693 **\$8.59**

**Threaded Steam**

Mounts with 1/2" male pipe thread.

G2958164 **\$7.50**

**Wired-In**

Waterproof wall plate with neoprene gasket. Fixed mounting. 9" leads.

G1898251 **\$6.49**

**OMRON****ZE Series Enclosed Limit Switches**

Sealed units feature a rubber boot and clamping band on head to seal out dirt. Large, easy-to-wire switch cavity with die-cast housing. 1/2"-14 NPSM conduit opening and side mounting bolts. NEMA 1, 2, 3, 4 and 5 enclosures. IP65. SPDT contact. 480 VAC/250 VDC. 15 A.

■ UL, CSA STANDARDS

G1899037 coil spring **\$23.99**  
G2468042 plunger **\$24.93**  
G1873006 roller arm lever **\$22.69**





### LEVITON Fixture Pull Switches

Heavy-duty, pull switches have phenolic body, polycarbonate cover with aluminum bushing and knurled bellmouth. Feature 18 AWG plastic insulated leads and 3/4" steel pull chains. Mount in panels up to 27/32" thick. 3A @ 125VAC-L. 6A @ 125VAC. 3A @ 250V. ■ UL, CSA STANDARDS



**SPST Pull Switch**  
Pull switch offers an "on/off" function. 2 connections.  
G1427203 **\$3.49**

**4-Position Pull Switch**  
Pull switch offers an "off/1 on/2 on/1 & 2 on" function. 3 connections.  
G2394551 **\$2.99**




### THOMAS & BETTS Automatic Door Light Switch

Installs quickly and easily on conventional hinge door jambs. Automatically turns closet lights on when door opens. Use in new installations or in rewiring and remodeling projects. SPST contact. Two connections.  
G2084722 **\$12.20**

### LEVITON Industrial Wall Switches

Single-pole toggle switches feature back and side wiring. 2HP rated. 120 to 277VAC. 30A. ■ UL, CSA, NOM STANDARDS

G1162122 *brown*  
G2899662 *ivory*  
G3506255 *white*  
each **\$12.50**



### LINEMASTER Foot Switches

Heavy-duty foot switches offer momentary action and feature a foot guard. NEMA 2, 4 and 13. 1HP. 125/250VAC. 20A. 6"w x 9"d x 4 1/2"h.


G0525734 *DPDT contact* **\$117.99**  
G3369247 *SPDT contact* **\$68.59**



### LINEMASTER Foot Switch Guard

Steel foot switch guard is for use with Linemaster general-purpose and light-duty foot switches. 6"w x 6"d x 4 1/2"h.

G2115714 **\$24.92**



### LEVITON

#### Feed-Through Cord Switch

Two-position switch accepts 2-wire, 18 AWG SJ and SJT cords up to 1/4" diameter. Screw terminal connections (2). SPST contact. 3A @ 125VAC. Brown. ■ UL STANDARDS  
G0439512 **\$2.19**



### ANDERSON POWER PRODUCTS Battery and Cable Connectors

Silver-plated electrolytic copper contacts offer low resistance and high conductivity. Annealed barrel ensures even crimping. Connectors are male/female, with impact-resistant polycarbonate housings. Solid barrel contacts are flared for easy insertion of stripped wire or cable and supported by tempered stainless steel leaf springs to maintain constant pressure and vibration resistance.



#	wire size	wire dia (max)	amps	price
G2642351	6 AWG	0.221"	50	<b>\$4.08</b>
G0333453	4 AWG	0.298"	120	<b>\$7.92</b>

### 3M Scotchlok Disconnects

Nylon-insulated crimp terminals offer excellent electrical contact and strain relief. For use in 600V applications. Funnel entry with tin-plated copper crimp connection. ■ UL, CSA STANDARDS  
► MORE ONLINE

#### Male Disconnect

16 to 14 AWG. Blue.  
G1969931 50-pack **\$4.78**



#### Female Disconnect

Female part has dents and rolled edges for excellent holding force and easy, quick disconnect. 12 to 10 AWG. Yellow.  
G0810957 50-pack **\$6.79**

### VALUE BRAND

#### Terminal Strip Jumpers


Flat slip-on jumpers are for use with 30A terminal strips.  
G1780843 10-pack **\$5.66**



### WIHA Master Electrician Insulated Set

Insulated tool set protects against electrical shocks up to 1,000V. Set comes in a molded tool box.

G4570063 25-piece set **\$354.53**  
set includes: 8" long nose, 6 5/16" stripping pliers, 9" combination pliers, inch/metric folding ruler, 8" high-leverage cutters, 8 1/2" knife, slotted screwdrivers (3mm, 4.5mm, 6mm), phillips screwdrivers (#1, 2), square screwdrivers (#1, #2), terminal block drivers (#1, #2), nut drivers (1/4", 3/8", 1/2", 5/8", 3/4", 7mm, 8mm, 10mm, 13mm)

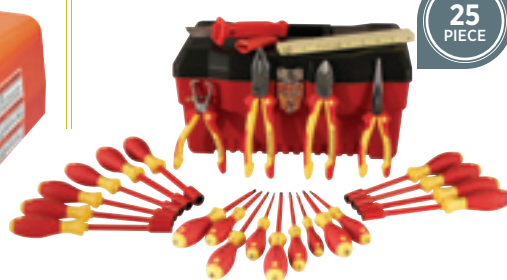

25  
PIECE

### IDEAL Wire Connectors

Secure multiple wires with a twist-on connection. ► MORE ONLINE

#### 71B Gray

Minimum combination #22 standard (2). Maximum combination #16 (2). 300V (max).  
G2762182 100-pack **\$6.44**

#### 72B Blue

Minimum combination #22 (2). Maximum combination #16 (3). 300V (max).  
G3451192 100-pack **\$4.59**

#### G73B Orange

Minimum combination #18 (1) & #20 (1). Maximum combination #14 (2). 600V (max).  
G1526305 100-pack **\$6.95**  
G0892071 300-pack **\$17.24**

#### 74B Yellow

Minimum combination #18 (2). Maximum combination #14 (4) & #18 (1). 600V (max).  
G2981842 175-pack **\$10.27**



### IDEAL Twister Wire Connectors

Twist-on wire connectors are for use on aluminum-to-copper connections and are not reusable. Connector type 65. Minimum combination #18 (2). Maximum combination #10 (4). 600V (max).  
G1040794 100-pack **\$53.99**



### IDEAL Wing-Nut Wire Connectors

Wing-nut wire connectors feature a twist-on connection. Connector type 451. Minimum combination #18 (2). Maximum combination #12 (3). 600V (max). ► MORE ONLINE  
G3477984 100-pack **\$10.89**



### 3M Premium Wire Connectors

Flexible skirt covers over stripped wire and conforms to tight spaces. Wide wire-taking range so each connector does the work of two or more standard connectors. For 600V pigtail applications with solid and stranded wire. Provides a secure hold. ■ UL, CSA STANDARDS  
► MORE ONLINE

#### Tan/Red

Minimum combination 18 AWG (2). Maximum combination 12 AWG (5). Replaces yellow, red and tan connectors.  
G1321047 750-pack **\$62.99**


#### Tan/Yellow

Minimum combination 22 AWG (2). Maximum combination 12 AWG (3). Replaces tan and yellow connectors.  
G2022666 500-pack **\$31.99**

#### Orange/Blue

Minimum combination 20 AWG (2). Maximum combination 12 AWG (3). Replaces orange, blue and gray connectors.  
G1441894 500-pack **\$33.93**





**COOPER BUSSMANN  
Miniature 16000 Series Power  
Distribution Blocks**

Splice cables or split primary power into a wide range of secondary circuits and provide a fixed tap-off point. Aluminum block accepts aluminum or copper wire. One primary connection per pole (14 to 2/0 CU, 8 to 2/0 AL). Four secondary connections per pole (4 to 14 CU, 4 to 8 AL). 600V. 175 A. ■ UL, CSA STANDARDS

- G2634816 2-pole **\$25.99**
- G1615801 3-pole **\$36.99**

**MAGNECRAFT Relay Sockets**

DIN rail/panel mount sockets feature screw clamp terminals. ■ UL, CSA STANDARDS

**8-Pin Octal Base**

Socket code A. 300/600V. 15/10 AAC.  
G1335993 **\$2.40**




**11-Pin Octal Base**

Socket code B. 300/600V. 15/5 AAC.  
G1367527 **\$4.47**



**11-Pin Square Base**

Socket code C. 300V. 15 AAC.  
G2708842 **\$3.98**



**8-Pin Square Base**

Socket code D. 300V. 10 AAC.  
G1656015 **\$3.89**



**DAYTON Octal Relay Sockets**

DIN rail/screw mount sockets feature screw terminals. 300V. 15 AAC. ■ UL, CSA STANDARDS

- G1753902 8 pins **\$5.35**
- G0895711 11 pins **\$9.07**



**DAYTON  
Time-Delay Relay**

Features a DIN rail base and LED display. SPDT contact. 0.1sec to 240hr. ½HP @ 120V. 1HP @ 240V. 12-240VAC/DC. 15 A resistive. 7 A inductive. ■ UL/CUL, CE STANDARDS  
✓ RoHS COMPLIANT  
G1602316 **\$88.06**



**OMRON G7 Series Power Relays**

Features include a flange-type mounting bracket, top-mounted terminals and a push-to-test button. DPST-NO contact. 6 pins. 25 A resistive/inductive.

**Screw Terminals**

24VDC.  
G0783273 **\$10.56**



**Tab Terminals**

24VAC.  
G1498691 **\$6.88**



**MAGNECRAFT Enclosed Power Relays**

Features include a DIN base with flange-type mounting bracket, top-mounted terminals and silver alloy contact material. 30 A. ■ CE, CSA STANDARDS

**92S Series with  
DPST-NO Contact**

DIN base. 6 pins.  
G2290127 120VAC **\$7.59**



**92S Series with  
DPDT Contact**

DIN base. 8 pins.  
G3131021 12 VDC **\$7.98**  
G2055042 24 VAC **\$8.69**  
G3266794 120 VAC **\$9.18**



**9AS Series with  
SPDT Contact**

5 pins.  
G3259706 120 VAC **\$5.52**



**OMRON Time-Delay Relay**

Multifunction features include on delay, off delay 1, off delay 2, interval display, cycle 1 shot, repeat cycle equal on/off time, signal interval/off delay and signal on delay/off delay. Octal base. SPDT contact. 11 pins. 0.1sec to 9990hr. 24-240VAC/12-240VDC. 3 A resistive. ■ UL/CUL, CE STANDARDS  
G1524047 **\$71.65**



**OMRON Time-Delay Relay**

Multifunction features include a repeat cycle time and independent on/off time functions. Octal base. DPDT contact. 8 pins. 1.2sec to 300hr. 100-240VAC. 5 A resistive. ■ UL/CUL, CE STANDARDS  
G0778687 **\$74.99**



**DAYTON Time-Delay Relay**

Multifunction features include on delay, off delay, interval delay, repeat cycle equal on/off times and cycle 1 shot functions. DPDT contact. 11 pins. 0.05sec to 999hr. ½HP @ 120V. ½HP @ 240V. 120VAC/DC. 10 A resistive. ■ UL/CUL, CE STANDARDS  
G0730231 **\$102.80**



**DAYTON Solid-State Time-Delay Relay**

Solid-state technology provides a long service life, reducing maintenance costs and production loss due to downtime. ¼" quick-connect tab connections (2). 1NO contact. 3 to 60sec. 24-240VAC/12-48VDC.  
G0567987 **\$28.43**



**3M Scotchlock Butt Splice Connectors**

Vinyl-insulated connectors feature a butted seam and a copper crimp connection. 600V (max). ■ UL, CSA STANDARDS

**Red**  
22 to 18 AWG.  
G2946973  
100-pack **\$13.99**



**Blue**  
16 to 14 AWG.  
G1913292  
100-pack **\$13.99**



**Yellow**  
12 to 10 AWG.  
G3250301  
100-pack **\$8.02**



**3M Scotchlok Fork Terminals**

Vinyl-insulated connectors feature a butted seam and a copper lug connection. 600V (max). ■ UL, CSA STANDARDS ► MORE SIZES ONLINE

**Red**  
22 to 18 AWG.  
G1792551 #8 stud  
G0653965 #10 stud  
100-pack **\$11.79**



**Blue**  
16 to 14 AWG.  
G2397324 #8 stud  
G1783162 #10 stud  
100-pack **\$11.79**



**Yellow**  
12 to 10 AWG.  
G1656164 #8 stud  
G1690674 #10 stud  
50-pack **\$7.59**



**HUBBELL WIRING DEVICE-KELLEMS  
Floor Box Cover**

Brass flush replacement plug is for a 2½" opening.  
G1316436 **\$17.99**



**LEVITON Duplex Receptacles**

Commercial-grade receptacles are self grounding. Heavy-duty thermoplastic construction with steel strap. Side wired. NEMA 5-20R configuration. 1HP. 125 VAC. 20A.

- G1459473 *ivory*
  - G0931874 *white*
  - G3080752 *gray*
  - G1645052 *brown*
- each **\$1.27**



**HUBBELL WIRING DEVICE-KELLEMS GFCI Receptacle**

GFCI receptacles protect from shock hazards that can occur in electrical appliances and tools, especially in wet and damp locations. Commercial-grade duplex receptacle features a an LED indicator light and manual reset. NEMA 5-20R configuration. 120 V. 20 A. Ivory. ■ UL, CSA STANDARDS

G2445003 **\$9.89**



**KILLARK Hazardous Area Plug and Receptacle**

Constructed of copper-free aluminum, plug and receptacle feature a polyester epoxy finish, stainless steel screws and a ½" feed-thru hub. NEMA 6-15 configuration. 2HP. 250 V. 15 A.

- G2030576 *plug* **\$67.40**
- G0590344 *receptacle* **\$290.91**



**STRAIGHT-BLADE PLUGS & CONNECTORS**

Hubbell and Leviton offer a wide variety of NEMA plugs and connectors specifically designed to meet a variety of electrical needs. Here are just a few...

**LEVITON Armored Plug**

Industrial-grade plug is constructed of PVC and steel. a NEMA 5-15P configuration. 0.254" to 0.700" cord. ½HP. 125 VAC. 15A. ■ UL, CSA

STANDARDS  
G2213915 **\$2.39**



**LEVITON Rubber Grip Plugs and Connector**

Dead-front nylon blade holder has an elastomeric body and metallic cord clamp. ½HP. 125 VAC. 15A. ■ UL, CSA STANDARDS

**NEMA 1-15P Configuration**  
General grade. 0.254" to 0.655" cord.  
G1509462 **\$1.75**

**NEMA 5-15P Configuration**  
Commercial grade.  
0.254" to 0.700" cord.  
G2308713 **\$1.79**

**NEMA 5-15R Configuration**  
Commercial grade.  
0.254" to 0.700" cord.  
G2579446 **\$2.99**



**HUBBELL WIRING DEVICE-KELLEMS Insulgrip Plug**

Tough, ribbed nylon housing withstands heavy abuse and holds securely without slippage. Powerful Vari-size cord grip adjusts to a wide range of cord sizes—10/3 SO to 18/3 S.J. "Picture Window" wiring gives visual assurance that conductors are inserted and terminated correctly. NEMA 5-15P configuration. ½HP. 125 VAC. 15 A.

G2165773 **\$14.29**



**LEVITON Nylon Plugs and Connector**

plugs are constructed of super tough nylon. 0.254" to 0.700" cord. ½HP.

■ UL, CSA STANDARDS

**NEMA 6-20P Configuration**  
Industrial grade. 250 VAC. 20 A.  
G0290814 **\$7.88**

**NEMA 5-15P Configuration**  
Industrial grade. 125 VAC. 15 A.  
G3124466 **\$4.29**

**NEMA 5-15R Configuration**  
General grade. 125 VAC. 15 A.  
G1704017 **\$6.79**



**HUBBELL WIRING DEVICE-KELLEMS Flanged Inlet**

Marine-grade flanged inlet is constructed of nylon. Side wired. NEMA 5-15P configuration. IP 20 rating. ½HP. 125 VAC. 15 A.

■ UL, CSA STANDARDS  
G3389285 **\$39.82**



**HUBBELL WIRING DEVICE-KELLEMS Miniature Flanged Inlet**

Heavy-duty flanged inlet is constructed of nylon/polycarbonate. Back wired. NEMA 5-15P configuration. ½HP. 125 VAC. 15 A. ■ UL, CSA STANDARDS

G2300803 **\$14.79**



**INTERMATIC 24-Hour Electromechanical Timers**

Gray enamel enclosures feature lock hasp and knockouts. Snap-out timing mechanism with manual "on/off" override does not interfere with program. Heavy-duty clutchless gears prevent slipping. Contacts are tungsten-rated to handle inrush currents 10x their rating. Self-lubricating, synchronous motors. Up to 12 "on/off" cycles per day. Includes trippers (2). 1 to 23hr. 40A. ■ UL, CSA STANDARDS

**T101 Timer**  
Indoor steel enclosure. SPST-NO contact. 2HP @ 120 V. 120 V. 5" w x 3" d x 7.8" h.  
G1814854 **\$46.00**



**T103 Timer**  
Indoor steel enclosure. DPST-NO contact. 2HP @ 120 V. 5HP @ 240 V. 120 V. 5" w x 3" d x 7.8" h.  
G2547036 **\$40.88**

**T104 Timer**  
Indoor steel enclosure. DPST-NO contact. 2HP @ 120 V. 5HP @ 240 V. 208-277 V. 5" w x 3" d x 7.8" h.  
G0428382 **\$34.89**



**T104R Timer**  
NEMA 3R outdoor steel enclosure. DPST-NO contact. 2HP @ 120 V. 5HP @ 240 V. 208-277 V. 5.3" w x 3.6" d x 9.4" h.  
G2848361 **\$49.99**



**T104P Timer**  
NEMA 3R outdoor plastic enclosure. DPST-NO contact. 2HP @ 120 V. 5HP @ 240 V. 208-277 V. 5.3" w x 3.8" d x 9.4" h.  
G2997181 **\$61.19**

**INTERMATIC Timer Replacement Parts**

Replacement parts are for use with Intermatic timers. ► CHECK ONLINE FOR THE RIGHT ONE FOR YOU

- Trippers**
- G2238957 *MFR# 156T1961A* 1-pair **\$1.42**
- G0393671 *MFR# 156T2978A* 12-pack **\$2.16**

- Replacement Motors**
- G2107996 *MFR# WG730* **\$14.25**
- G2612346 *MFR# WG1570* **\$14.93**
- G0271616 *MFR# WG1573* **\$12.92**
- G0623664 *MFR# WG733* **\$15.74**







#### TORK Digital Plug-In Timer

Compact timer plugs into standard receptacle and includes a manual "on/off" override. Timer features a grounded plug and outlet, manual daylight savings mode, battery backup, random mode and countdown feature. NEMA 5-15R receptacle. 1min to 7 day. 120 V. 15 A. 3¼" w x 2½" d x 3¼" h. ■ CSA STANDARDS  
G3658015 **\$10.92**



#### LEVITON Indoor Lamp and Appliance Timer

Compact timer plugs into standard receptacle and includes a manual "on/off" override. Timer features random settings, astronomical clock and daylight savings auto adjust. NEMA 5-15R receptacle. 1min to 7 day. 120 V. 15 A. 2¾" w x 1¼" d x 3¾" h. ■ UL/NOM STANDARDS  
G3689691 **\$19.12**

#### INTERMATIC Spring-Wound Mechanical Timers

Features include a gray polycarbonate wall plate with plastic time knob and all-metal gear timing mechanism. Mount in single-gang outlet box. 1HP @ 120V. 2HP @ 240V.  
■ UL, CSA STANDARDS

**SPST Contact**  
G2484973 0 to 60 min **\$16.93**  
G2940235 0 to 6hr **\$21.94**

**SPST Contact with Hold Feature**  
Hold feature allows for continuous "on" applications.

G2350171 0 to 12hr **\$26.08**



#### DIEHL Electromechanical Modules

Synchronous motor modules are for panel-mount installations. A 2½" diameter dial opening is required to mount module through panel. SPST-NO contact. 120 VAC timer input. ½HP @ 120 V. 120 V. 20/15 A.  
■ UL, CSA STANDARDS



**24-Hour Module**  
24-hour timers have up to 48 "on/off" settings per day. 15 min to 23½ hr.  
G1520802 **\$27.13**

**7-Day Module**  
7-day timers have 42 "on/off" settings per week, 6 settings per day. 2 hr to 6 day/20 hr.  
G0428066 **\$30.91**




#### SQUARE D Definite Purpose Contactors

Suitable for air compressors, agricultural equipment, pumps, food service equipment and HVACR equipment. Quick-connect terminals and binder head screws enable easy straight-through wiring. Double-break contacts. Industry-standard mounting. 500,000-operation mechanical life. 600 VAC (max).  
■ UL, CSA STANDARDS

**Compact Contactors**  
2 poles. 30 A inductive.  
40 A resistive.  
2.16" w x 2.22" d x 3.29" h.  
G0937912 24 VAC coil **\$9.89**  
G0559002 120 VAC coil **\$18.54**

**Standard Contactor**  
3 poles. 40 A inductive.  
50 A resistive. 2.5" w x 3.12" d x 4" h.  
G2315381 120 VAC coil **\$34.93**



#### DAYTON Drum Reversing Switches

Use for reversing motors—should be used in conjunction with a motor that has overload protection or where no overload protection is required. Heavy copper drum contacts and metal enclosure with pressed steel case and frame. ■ UL, CSA STANDARDS

**Single-Phase Switch**  
1½ HP @ 115 VAC.  
2HP @ 230 VAC.  
¼ HP @ 115 VDC.  
¼ HP @ 230 VDC.  
G0754241 **\$52.75**

**Poly-Phase Switch**  
1½ HP @ 1-phase 115 VAC.  
2HP @ 1-phase 230 VAC.  
2HP @ 3-phase 230 VAC.  
1HP @ 3-phase 460 VAC.  
¼ HP @ 115 VDC.  
¼ HP @ 230 VDC.  
G3423901 **\$59.88**



#### INTERMATIC Water Heater Timers

Mechanical and digital water heater timers automatically turn off water heater at designated times. Timers feature an indoor steel enclosure with lock hasp. DPST contact. 40 A. 5" w x 3" d x 7¾" h. ■ UL, CSA STANDARDS

**Mechanical Timers**  
Includes trippers (2). 5HP @ 240 V. 60 min to 23½ hr. Can accommodate up to 12 "on/off" cycles.  
G1337341 T104-20 (208-240 V) **\$60.73**  
G1311536 WH-40 (240 V) **\$39.89**

**Digital Timer**  
Programmable with LED and battery backup. 1.5HP @ 240 V. 240 V. 1min to 6 day/23½ hr/59 min. Can accommodate up to 42 "on/off" cycles.  
G0632073 EH40 (240 V) **\$60.20**



#### TORK Programmable Electronic Timers

Features include capacitor power outage backup, permanent schedule retention and a tan plastic indoor/outdoor enclosure with locking hasp. NEMA 3R enclosure. Minimum setting is 1 minute. Single channel. 1HP @ 120 V. 2HP @ 240 V. 120-277 V. 40 A. 5½" w x 3½" d x 8½" h. ■ UL/CUL, CSA STANDARDS

**SPST Contact**  
G0759936 24-hour **\$67.28**  
G3268727 7-day **\$118.43**

**DPST Contact**  
G1940827 7-day **\$130.96**

**BELL Weatherproof Outlet Boxes**

Standard single-gang boxes are supplied with closure plugs and a self-threading ground screw. Heavy-duty cast aluminum construction with polyester powder-protective silver-gray finish. 18.3 cu-in capacity.

■ UL, CSA STANDARDS

G1091964 3 inlets **\$1.95**  
G0735874 4 inlets **\$3.47**

**RACO Conduit Boxes and Covers**

Conduit boxes and covers feature galvanized zinc construction. ■ UL STANDARDS




**Square Box**  
Welded corner edges. 30.3 cu-in capacity. 4" w x 2 1/8" d x 4" h.

G2248626 **\$1.29**

**Blank Cover**

Flat design. 4" x 4".

G1115371 **\$0.49**



**Duplex Receptacle Cover**  
Raised design with crushed corners. For use with two duplex receptacles. Includes screws. 4" x 4".

G3339734 **\$1.29**

**STEEL CITY Floor Box and Cover**

Open-office planning options abound with boxes that deliver power, communications and data service from standard conduit with no exposed service fittings. Quick leveling to desired concrete depth. ■ UL STANDARDS

**Floor Box**


Steel construction with a hinged floor plate. 90 cu-in capacity. 10 1/4" w x 4 1/16" d x 3 3/4" h.

G1435156 **\$77.57**

**Floor Box Cover**

Gray polycarbonate construction with a steel reinforcement plate. 8 1/4" w x 5 1/4" d x 4" h.

G3312093 **\$85.99**

**THOMAS & BETTS Cord Grip Connectors**

Nonmetallic connectors are excellent for use in limited-space environments where multiple cables enter an enclosure. Liquid-tight nylon 6 construction provides excellent corrosion, chemical and impact resistance. NEMA 4 and IP68 rated. Gray.

■ UL, CSA STANDARDS

Q #	conduit size	cord diameter	connector type	length	price
G2446044	3/8"	0.197" to 0.394"	1 cord	1.66"	<b>\$1.85</b>
G1448212	1/2"	0.394" to 0.551"	1 cord	1.76"	<b>\$1.78</b>
G1431683	1/2"	0.190" to 0.250"	2 cord	1.76"	<b>\$3.29</b>
G3472235	1/2"	0.190" to 0.250"	3 cord	1.76"	<b>\$3.44</b>
G2887561	3/4"	0.230" to 0.290"	4 cord	1.97"	<b>\$4.59</b>

**WIREMOLD Plastic Raceway**

Plastic construction features a single channel, snap-on cover and entrance-end connector. Includes wide adhesive tape along entire length for mounting. Ivory.

■ UL, CSA STANDARDS

**400 Series**


7/8" w x 60" d x 7/16" h

G2397385 **\$8.36**

**2300 Series**

2 1/4" w x 60" d x 1 1/16" h

G0605561 **\$20.80**

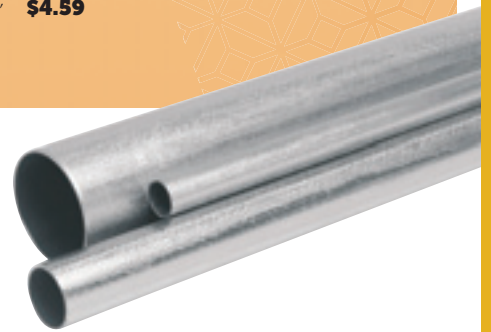**VALUE BRAND Metal Conduit**

Electrical metallic tubing (EMT) unthreaded steel conduit is hot galvanized and provides easy bending, cutting and joining. Resists flattening, kinking and splitting to help create smooth continuous raceways for faster wire pulling. 10' length. ■ UL STANDARDS

Q #	trade size	outer diameter	wall thickness	price
G0518883	1/2"	0.706"	0.042"	<b>\$2.97</b>
G2051707	3/4"	0.922"	0.049"	<b>\$6.90</b>
G2374924	1"	1.163"	0.057"	<b>\$11.85</b>
G2111645	1 1/4"	1.51"	0.065"	<b>\$14.87</b>
G1435384	1 1/2"	1.74"	0.065"	<b>\$22.17</b>
G1955274	2"	2.197"	0.065"	<b>\$26.45</b>

**WIREMOLD****G4000 Series Metal Raceway**

Ideal for use in power and communication wiring applications. Units can be divided for multiservice applications in large installations. Ivory. ■ UL/CUL, CSA STANDARDS

**Manually Operated Base**

Single-channel base is constructed of 0.054" thick galvanized steel with two 3/32" knockouts approximately every 18" throughout. 4 3/4" w x 10" d x 1 1/4" h.

G0311595 **\$48.64**

**Cover**


Raceway cover is constructed of 0.04" thick galvanized steel. 4 3/4" w x 5" d x 1/2" h.

G0258492 **\$17.99**

**Blank End**

Raceway fitting is for closing the open end of base. Features two 1/2" knockouts to facilitate end feeding. 4 3/4" w x 1 1/4" d x 1 1/4" h.


G0242733 **\$4.95**

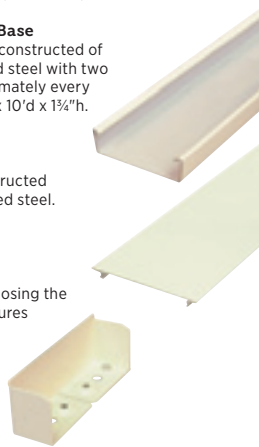**ERITECH****Ground Rods**

Pointed-end ground rod electrodes dissipate electric current directly into the earth. Bonded copper steel construction. 30-year service life. 5/8" diameter.

■ UL STANDARDS

G1320401 4' length **\$10.70**  
G0255595 8' length **\$15.22**  
G0815972 10' length **\$17.99**

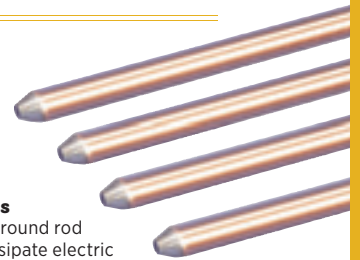**STEEL CITY Floor Box Cover**

Duplex receptacle cover features polycarbonate construction and includes carpet plate. For use with Steel City 68-P floor box. Brown. ■ UL STANDARDS

G0744721 **\$22.99**

**ERITECH Ground Rod Clamp**

Acorn-style ground rod features bronze construction and is suitable for direct burial application. 1/2" to 5/8" rod diameter. 8AWG solid to 2AWG stranded conductor size.

■ UL STANDARDS

G1239743 **\$1.49**





MORE THAN 400,000 ITEMS ONLINE



**3M Wire Marker Tape Dispenser**

ScotchCode dispenser is compact and refillable with easy cut-off. Provides fast, convenient access to 10 rolls of wire and cable marking tape. Rolls are preprinted black on white. Nonsmear polyester construction with high-tack acrylic adhesive. Pre-printed numbers 0 to 9. 1¼" label width.

G3472226 **\$27.62**

**3M Cable Ties**

Nylon construction resists flame, fungus, solvents, alkalies and grease. Standard locking design.

**12" Length**

3" bundle (max). 50 lb tensile strength. 0.18" width.

G1722034 *black* 100-pack **\$6.09**  
 G1929191 *natural* 100-pack **\$2.99**

**15" Length**

4" bundle (max). 120 lb tensile strength. 0.3" width.

G1039193 *natural* 100-pack **\$14.99**



**THOMAS & BETTS**

**Cable Tie Mounting Pads**

Cable tie mounting pads accept cable ties from 18 lb to 50 lb tensile strength (miniature through standard).

Nylon construction with synthetic rubber adhesive. 4-way. 1½" x 1½".

■ UL STANDARDS

G1731414 100-pack **\$9.99**



**ENERGY CHAIN**

**Zipper Style Cable Carriers**


Small zipper-style cable and hose carriers feature plastic construction. Extremely quiet—suitable for noise-sensitive areas. Hinged-opening cavity bars allow quick installation of cables and hoses. Designed for applications with smaller conduits, short travels and limited space. The lids on the outer radius snap-open like a zipper. Although the lids are interconnected, they can still be separated as needed. 1.5" bend radius. 7.28" x 3.94" loop.

**Cable Carriers**

Z#	cavity	length	links	price
G3044763	0.59" x 0.67"	1'	10	<b>\$15.85</b>
G0258282	1.50" x 0.67"	3'	30	<b>\$50.86</b>

**Mounting Brackets**

Z#	cavity	price
G2817087	0.59" x 0.67"	<b>\$10.68</b>
G0887171	1.50" x 0.67"	<b>\$13.19</b>

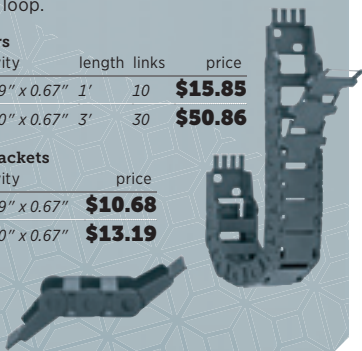

**VALUE BRAND VGA Adapter**

Video adapter converts VGA signal to RCA/S-Video. Plug and play installation. 3 ports.

G4474662 **\$3.00**



**VALUE BRAND Cable Splitter**

RG-59 cable features one set of 3-RCA male connections to two sets of 3-RCA female connections.

G0345423 **\$7.22**



**133**  
PIECE

**3M Heat-Shrink Tubing Kit**

Flame-retardant polyolefin tubing is split-resistant and fast-shrinking for rapid installation. Versatile assortment provides a complete selection of popular sizes and colors. Kits include 30 to 1AWG tubes in a translucent plastic box. 2:1 shrink ratio. 600 V (max).

■ UL STANDARDS

G3186206 133-piece kit **\$67.70**

kit includes: black, red, white, yellow, blue, green and clear tubes {½" (35), ⅜" (28), ⅜" (21), ¼" (21), ⅜" (14), ½" (14)}

**SCHNEIDER ELECTRIC Contact Blocks**

Terminals are at 20° angle to eliminate interference with other contact blocks mounted in tandem. Double-break fine silver contacts with wiping action. Screw/clamp terminal connection. 12 to 24 AWG wire range. Finger-proof shroud operator. For use with Schneider 9001K Series 30mm operators. NEMA A600/P600 rating. 10A @ 250VAC. ■ UL, CSA, CE STANDARDS

G2867234 1 NO contact **\$9.70**  
 G2671277 1 NC contact **\$9.70**  
 G3438023 1 NO, 1 NC contact **\$19.39**



**GREENLEE**

**Electrician's Tool Bag**

Heavy-duty bag is constructed of black nylon and features reinforced pockets, large-opening steel-framed mouth with hinge and zipper, padded handles and adjustable shoulder strap. Large interior can carry large tools. Elastic straps on outside of bag can hold levels, hammers and crowbars. 31 pockets (26 inside, 5 outside). 11" w x 18" d x 10" h.

G2804496 **\$37.19**



**HUBBELL WIRING DEVICE-KELLEMS**

**Floor Cable Covers**

Floor cable covers are constructed of durable, flexible, nonmetallic PVC and feature a preslit bottom. Tapered covers reduce tripping hazards and protect cords and cables from light traffic.

**0.31" Maximum Cable**

2.75" w x 10" d x 0.53" h.

G2947935 *black*  
 G0716791 *beige*  
 G1923171 *brown*  
 each **\$15.93**


**0.5" Maximum Cable**

3" w x 5" d x 0.75" h.

G2294135 *black*  
 G2635157 *beige*  
 G1326087 *brown*  
 each **\$12.27**







#### WHITE-RODGERS

##### Class 2 Transformers

Provide energy limiting to power 24VAC control systems and step down available line voltage. All units include primary and secondary leads. Single phase. 24 VAC output. ■ eURus STANDARDS

##### Multi Mount

Closed enclosure. 40VA rating. 3" w x 4.25" d x 4.25" h.

G1296741 120 VAC input **\$10.78**

G3231803 120/208/240 VAC input **\$12.08**

##### Foot Mount

Open enclosure. 40VA rating. 2.7" w x 4" d x 3.2" h.

G1296924 120/208/240 VAC input **\$8.20**

##### Multi Mount w/Circuit Breaker

Open enclosure and secondary circuit breaker. 60VA rating. 4.4" w x 3.3" d x 3.4" h.

G1012636 120/208/240 VAC input **\$28.88**

#### POMONA Test Lead Wires

Test lead wire features silicon insulation. 18 AWG wire gauge. 65 AWG/36 tinned copper conductor stranding. 33VAC/70VDC. 20A (max). 0.144" nominal OD. 50' roll.

G3141232 black

G1169917 red

each **\$24.95**



#### SQUARE D

##### Hardwired Surge Protector

Panel-mount surge suppressor features plastic construction with a NEMA 4X enclosure and provides six modes of protection. Includes mounting for nipple installation. 2 poles. 3 wires. 12 AWG wire gauge. 120/240V. 10kA nominal discharge. ■ UL STANDARDS

RoHS COMPLIANT  
G4618844 **\$105.23**



#### SCHNEIDER ELECTRIC Contact Blocks


For use with chrome operators. Screw clamp terminal connection. 22mm. 1.0A @ 600VAC.

■ UL, CSA, CE STANDARDS

G1607602 1NO slow break

G0977611 1NC slow break

each **\$7.40**



#### THOMAS & BETTS Cord Grip Connector

Easy-to-use Ranger Series strain-relief connectors can be tightened with pliers or screwdrivers when working in tight areas. Straight, liquid-tight cord grip connectors are 1 3/4" in length with a 9/16" minimum throat diameter. 1/2" conduit size.

■ UL, CSA, NEC STANDARDS ► MORE ONLINE

##### Steel

G2188374 0.125" to 0.375" cord

G1997825 0.310" to 0.560" cord

each **\$5.21**

##### Aluminum

G3144924 0.125" to 0.375" cord

G1238824 0.310" to 0.560" cord

each **\$5.52**



#### VALUE BRAND

##### Indoor/Outdoor Extension Cords

General-purpose extension cords feature a SJTW cord with round PVC jacket. Power indicator light on receptacle. NEMA 5-15 plug and receptacle configuration. Power indicator in receptacle end. 125V. 15A. ■ UL STANDARDS

##### 14/3 Cord with 1 Outlet

Orange jacket with black stripe.

G1123945 25' **\$12.99**

G0935663 50' **\$19.99**

##### 12/3 Cord with 1 Outlet

Yellow jacket with black stripe.

G3411204 10' **\$11.09**

G2647032 25' **\$24.08**

G1878624 50' **\$29.99**

G2029237 100' **\$59.99**

##### 12/3 Cord with 3 Outlets

Yellow jacket with black stripe.

G2093007 25' **\$24.99**



#### VALUE BRAND

##### Extreme Temperature Extension Cords

All-weather PVC alloy stays flexible to -58°F without cracking or compromising the integrity of the cord. SJTOW cord with PVC alloy jacket provides excellent resistance to UV, oils, chemicals, moisture and abrasion. Power indicator light on receptacle. For indoor or outdoor use. 120V. ■ UL/CUL, OSHA STANDARDS

► MORE ONLINE

##### 1 Outlet

10/3 cord. NEMA 5-20 plug and receptacle configuration. 20A (max).

G0958465 50' **\$70.38**

G0646265 100' **\$127.49**

##### 6 Outlets

12/3 cord. NEMA 5-15 plug and receptacle configuration. 15A (max).

G2281675 6' **\$7.69**

G0762377 25' **\$23.83**



#### SCHNEIDER ELECTRIC Emergency Stop Push Buttons

Complete unit includes operator, cap and contact block for easy installation. Aluminum-zinc alloy head with chrome-plated die-cast bezel. 22mm with non-illuminated 40mm mushroom head. Screw clamp terminal connection. 1NC contact. NEMA 1, 2, 3, 4, 4X, 12 and 13 ratings. ■ UL, CSA, CE, IEC STANDARDS

G1082347 push/pull **\$29.99**

G1400707 turn to release **\$61.87**

#### HUBBELL WIRING DEVICE-KELLEMS Pendant Push-Button Stations

NEMA 4X pendant stations feature a nylon cord grip and sealing ring keep out dust and moisture. Momentary operation for control circuit operation of electric motor hoists and other machinery. 6A at 120V. 3A at 240V.

■ UL, CSA STANDARDS

##### 2NO Contact

Up/Down functions—mechanical interlock prevents activating both buttons simultaneously.

G2927696 **\$79.69**

##### 1NO/1NC Contact

Start/Stop functions.

G0278713 **\$79.99**



#### BAYCO Retractable Cord Reels

Steel retractable cord reels includes cord.

■ UL, CSA STANDARDS

##### 14/3 Cord

30' SJTW cord. 600V. 16A (max). 12 1/2" w x 16 1/2" d x 17 1/2" h.

G4140613 **\$49.99**



##### 12/3 Cord with Circuit Breaker

50' SJTW cord. 125V. 15A (max). 19 1/8" w x 9 3/8" d x 13 3/8" h.

G4223554 **\$81.70**



##### 12/3 Cord with Circuit Breaker

50' SEOW cord. 600V. 20A (max). 16" w x 19" d x 20 1/4" h.

G4191747 **\$93.47**





#### WHITE-RODGERS DC Power Solenoids

70 Series DC power solenoids are continuous duty and feature a dust-resistant enclosure and standard bracket mounting base. Isolated coil with #10-32 UNF-2A thread termination. Copper contact with  $\frac{5}{16}$ -24 UNF-2A thread termination. SPNO contacts. Rated 6/12V @ 80A. Rated 24/36V @ 50A. ■ UL STANDARDS

G2774143 36 VDC coil **\$28.29**  
G1031852 12 VDC coil **\$32.69**

#### DORMEYER Laundry Equipment Solenoids

Pull-type laundry equipment solenoids are for replacement service on home laundry washers and dryers. Solenoids feature a flanged base and  $\frac{1}{4}$ " spade terminals for fast installation. Intermittent duty with a maximum on time of 3 minutes.

✓ RoHS COMPLIANT

**Pull Range 96 to 128 oz**  
 $\frac{1}{4}$ " to 1" stroke. 120 VAC.  
0.55A seated. 18.3 ohm.  
G3241375 **\$18.04**



**Pull Range 240 to 384 oz**  
 $\frac{1}{4}$ " to 1 $\frac{1}{4}$ " stroke. 115 VAC.  
1.2A seated. 4.8 ohm.  
G1454442 **\$26.44**




#### DORMEYER Laminated Solenoids

Pull-type laminated solenoids are constructed of durable laminated steel with corrosion-resistant frame and plunger. Solenoids have polyester or nylon bobbins, encapsulated or taped coils, steel plunger springs and brass plunger guides. Continuous duty cycle. Solder lug coil terminals. 120 VAC. ✓ RoHS COMPLIANT


**Pull Force 14.4 to 48 oz**  
 $\frac{1}{8}$ " to  $\frac{3}{4}$ " stroke.  
0.24A seated. 88 ohm.  
G0528272 **\$15.20**




**Pull Force 64 to 128 oz**  
 $\frac{1}{8}$ " to 1" stroke. 0.43A seated.  
20.5 ohm.  
G1062792 **\$21.99**



**Pull Force 92.8 to 176 oz**  
 $\frac{1}{8}$ " to 1" stroke. 0.48A seated.  
14.9 ohm.  
G2504686 **\$34.85**



**Pull Force 192 to 256 oz**  
 $\frac{1}{8}$ " to 1 $\frac{1}{4}$ " stroke.  
0.66A seated. 6.5 ohm.  
G2959004 **\$30.41**



#### REDINGTON Quartz Hour Meters

722/732 Series hour meters feature reliable quartz accuracy for precise timekeeping. Units feature a sealed black polymer case, mounting holes and  $\frac{1}{4}$ " spade terminals. Display shows elapsed time to 99999.9 and features white-on-black hours and black on white 10ths. ■ UL/CUL, CE STANDARDS



##### Rectangular Bezel

Rectangular bezel face measures 2.12" x 1.25", features 2 holes for mounting and fits panel opening of 1.45" x 0.95".

G1689721 10 to 80 VDC  
G1427885 90 to 264 VAC  
each **\$11.08**



##### Round Bezel

Round bezel face measures 2.8", features 3 holes for mounting and fits panel opening of 2".

G3184842 10 to 80 VDC  
G3482464 90 to 264 VAC  
each **\$11.09**

#### ENM Electrical Hour Meter

Hour meters feature ABS construction with 99999.9-hour elapsed time display and spade terminals.

##### Electrical Rectangular Bezel

Flush bezel face measures 1.77" x 1.25", features a back flange for mounting and fits panel opening of 1.45" x 0.95".

G1464897 **\$19.99**



##### Electrical Round Bezel

Round bezel face measures 2.8", features 3 holes for mounting and fits panel opening of 2".

G1946052 **\$19.99**



##### Electronic Rectangular Bezel

LCD display with remote signal reset. Rectangular bezel face measures 2.12" x 1.25", features 2 holes for mounting and fits panel opening of 1.45" x 0.95".

G0764881 **\$28.99**



#### ARLINGTON

##### Strain-Relief Cord Connectors

Low-profile straight cord grips are constructed of nylon. Gripping grommet creates a liquid-tight seal with superior pullout resistance. Sealing ring assures a liquid-tight seal with nonthreaded openings.  $\frac{1}{2}$ " conduit size. 1.792" length.

■ CSA STANDARDS

G1800802 0.100" to 0.300" cord **\$1.69**  
G1205696 0.200" to 0.472" cord **\$1.20**



#### HUBBELL WIRING DEVICE-KELLEMS

##### Nylon Cord Connectors

Straight connectors provide excellent pullout strength and can be installed without disassembly. Threaded body guards against skipping and speeds installation. Compression nut ratchet prevents unintentional loosening. For use with 0.17" to 0.45" cord.  $\frac{1}{2}$ " conduit size. 1.7" length. ■ UL, CSA STANDARDS

G1693921 connector **\$2.42**  
G0746347 locknut **\$0.58**



#### HOBBS DC Quartz Hour Meters

Quartz hour meters record operating time of vehicles or powered equipment which is useful for measuring maintenance intervals or tracking cost vs. operating time. Shock-resistant cases are sealed to prevent premature wear and failure in dusty or damp environments. Hour meters feature quartz accuracy to within  $\pm 0.02\%$  over entire voltage. Display shows elapsed time to 9999.9 and features white-on-black hours and black on white 10ths. Relay-driven odometer. 10 to 80 VDC. ■ UL, CSA, STANDARDS

✓ RoHS COMPLIANT

##### Rectangular Bezel with Flanges

Rectangular bezel face measures 2.13" x 1.26" and fits panel opening of 1.45" x 0.95".

G2065655 **\$46.99**



##### Round Bezel with Flanges

Round bezel face measures 2.86" and fits panel opening of 2".

G0814134 **\$37.99**



##### Round Bezel with Bracket

Round bezel face measures 2.5", with a 2.18" bezel-to-back length and fits panel opening of 2".

G1046062 **\$35.99**



#### ENM Counter

Mechanical hand-tally counter features four white-on-black digits, reset knob and 2.09" base for mounting. 2.76" height.

G0250196 **\$10.45**

#### KLEIN TOOLS

##### Wire Stripper/Cutter

For use with 10 to 18 AWG solid and 12 to 20 AWG stranded wires. Marked on both sides.  $\frac{6}{16}$ " length.

G2891043 **\$10.46**



#### VALUE BRAND Electrical Tape

Electrical tape is constructed of vinyl. 7mm thickness.  $\frac{3}{4}$ " x 22 yd roll.

G3851696 red  
G3851687 orange  
G3851705 white  
each **\$0.87**



#### 3M Utility Tape

Vinyl utility tape features a rubber adhesive and is UV resistant. 6mm thickness. 2" x 150' roll.

G4171081 **\$4.47**







CHECK ONLINE FOR THE RIGHT ONE FOR YOU

**GENERAC Generator Maintenance Kits**  
Maintenance kits offer the components needed to perform regular upkeep. » CHECK ONLINE FOR THE RIGHT ONE FOR YOU

#### Air-Cooled Kit

Includes air filter, oil filter, spark plugs, oil funnel, chamois, and reminder sticker.

G3990122 MFR# 6004 **\$18.99**

#### Liquid-Cooled Kits

Includes air filter, oil filter, spark plugs, oil funnel, chamois and reminder sticker.

G4212643 MFR# 6171 **\$57.99**

G4087404 MFR# 5984 **\$57.99**

G3903532 MFR# 5985 **\$89.99**

#### Cold-Weather Kit

Includes battery warmer and crankcase heater.

G4109944 MFR# 5865 **\$269.50**

#### GENERAC Wet Cell Battery

12V battery is for use with all air and liquid cooled units 60kW and below, except for 48kW models. 525 CCA. 6½" width. 7⅝" height.

G3990813 **\$89.00**



**GENERAC Nexus Smart Switches**  
Digital load management (DLM) technology provides the capability to manage two air conditioning loads with no need for additional hardware. Automatic transfer switches are for use with Nexus Digital Controllers on Generac air- and liquid-cooled generators through 150kW. Match the transfer switch to the electrical service voltage/phase and generator voltage/phase. Aluminum NEMA 3R enclosure. Single phase. 240 V.

#	max amps	for use with	price
G2225203	100 A	8 to 22 kW	<b>\$342.00</b>
G0651341*	100 A	8 to 22 kW	<b>\$489.00</b>
G2584547	200 A	8 to 48 kW	<b>\$587.00</b>
G2011405*	200 A	8 to 48 kW	<b>\$685.00</b>

\* service rated

#### GENERAC Automatic Transfer Switch with Load Center

Load center includes 30' and 2' color-coded electrical conduit prewired for easy installation. Includes 16 circuit load center. Steel NEMA 1 enclosure. Single phase. 240 V. 100 A (max). For use with 24kW (max). 12½" x 7" d x 29¼" h.

■ CSA STANDARDS  
G0822631 **\$489.00**



#### GENERAC Automatic Standby Generators

Air-cooled automatic standby generators feature a Generac OHVI industrial engine and True Power Technology for smooth, consistent power. For residential or commercial applications as backup only. Units include 1" flexible fuel line connector and composite mounting pad for easy installation. Runs on natural or liquid propane gas. Power factor 1. 525 CCA battery required. RTS transfer switch required. 25" w x 48" d x 29" h. ■ UL, CSA, NEMA, EGSA STANDARDS

#### Steel Enclosure

#	kW	voltage	connection	price
G3181001	8 LP/7 NG	240	½" NPT	<b>\$1998.00</b>
G1870136	10 LP/9 NG	120/240	½" NPT	<b>\$2599.99</b>

#### Aluminum Enclosure

Models equipped with aluminum housing are designed to withstand highly corrosive environments.

#	kW	voltage	connection	price
G0364743	17 LP/16 NG	240	½" NPT	<b>\$3850.00</b>
G2601977	20 LP/18 NG	240	¾" NPT	<b>\$3997.00</b>



#### BRIGGS & STRATTON Portable Generators

Portable generators feature wheels and fold-down handle for easy mobility. Elevated control panel with rubber outlet cover and hour meter. For outdoor use only. First oil included.

#### 251 cc Engine

Recoil starter. Power Surge alternator. 4 gal capacity. 8hr run time @ ½ load. 23½" w x 22½" d x 18½" h.

G5079015 3500 W rated/4375 W surge **\$462.99**

#### 420 cc Engine

Electric/recoil starter. Power Surge alternator. Includes battery. 7 gal capacity. 9hr run time @ ½ load. 34¾" w x 23" d x 26¾" h.

G1744872 7000 W rated/8750 W surge **\$1009.31**

G1994447 8000 W rated/10000 W surge **\$1299.99**

#### 570 cc Engine

Electric/recoil starter. Brushless alternator. Includes battery. 7 gal capacity. 7hr run time @ ½ load. 31" w x 27½" d x 27⅞" h.

G1903675 10000 W rated/12500 W surge **\$2157.99**



#### OMRON Temperature Controls

Designed to monitor and control heating and/or cooling process applications. Display shows the desired temperature setpoint value (SV) and the process temperature (PV). Easily programmed from the front panel. Units feature water-resistant NEMA 4X construction. Thermocouple input—no calibration required. ½" DIN. SPST-NO switch. 20 second control period. 100 to 240 VAC input.

■ UL, CSA, CE STANDARDS

#### On/Off or PID Modes

Units feature easy setting through internal DIP and rotary switches, on-demand auto-tune, multiple input, deviation indicator for easy monitoring, 8-mode alarm output and sensor error detection. Input shift function adjusts display to reflect known sensor offsets. 1.89" w x 3.31" d x 1.89" h

G2649403 relay output **\$159.99**  
G2563215 voltage output **\$159.99**

#### On/Off or 2-PID Auto-Tune Modes

Unit features auto/manual operation, run/stop and alarm. 7.5 VA power consumption. 1.89" w x 3.82" d x 1.89" h

G2536904 relay output **\$183.99**





LANTERN BATTERIES

Rayovac batteries feature a mercury-free formula.



**RAYOVAC Industrial General Purpose Lantern Battery**  
Spring terminal. 6V.  
2¾" w x 2¾" d x 4½" h.  
G0299887 **\$2.08**



**RAYOVAC Industrial Heavy Duty Lantern Battery**  
Spring terminal. 6V.  
2¾" w x 2¾" d x 4½" h.  
G0566115 **\$1.88**



**RAYOVAC General Purpose Lantern Battery**  
Screw terminal. 6V.  
2¾" w x 5½" d x 4¾" h.  
G1723477 **\$8.03**



**RAYOVAC General Purpose Lantern Battery**  
Screw terminal. 12V.  
2¾" w x 5¼" d x 4¾" h.  
G3330512 **\$7.69**



**RAYOVAC Industrial Heavy Duty Max Lantern Battery**  
Spring terminal. 6V.  
2¾" w x 2¾" d x 4½" h.  
G1261443 **\$2.44**



**RAYOVAC Heavy Duty Lantern Battery**  
Screw terminal. 6V.  
2¾" w x 2¾" d x 4½" h.  
G3056584 **\$4.29**



**RAYOVAC Alkaline Lantern Battery**  
Screw terminal. 7.5V. 4" w x 7¼" d x 3¾" h.  
G0847217 **\$26.33**

**VALUE BRAND Alkaline Batteries**

Standard alkaline batteries are suitable for flashlights, smoke detectors and multimeters. 1.5V (except 9V). Date coded. Mercury free.

G3729266	AAA	24-pack	<b>\$6.14</b>
G4213964	AA	24-pack	<b>\$6.48</b>
G1960621	C	6-pack	<b>\$3.99</b>
G0409236	D	6-pack	<b>\$5.79</b>
G0590807	9V	4-pack	<b>\$4.49</b>



**DURACELL Button Cell Batteries**

Silver oxide button cell batteries with Duralock Power Preserve technology can power test equipment and measurement tools. They can also provide memory backup. Designed for small electronics and watches. Offers reliable, long lasting, optimum performance. Mercury free. 1.5V. ■ ANSI STANDARDS

G2622706	303/357	<b>\$0.94</b>
G2157994	384/392	<b>\$0.87</b>
G0895885	389/390	<b>\$0.79</b>



**DURACELL Coin Cell Batteries**

Lithium coin cell batteries with Duralock Power Preserve technology can power electronic devices including calculators, key fobs, memory backups and testing meters. High capacity, low self-discharge for longer service life. Mercury free. 3V. ■ ANSI STANDARDS

G0250625	2016	each	<b>\$1.47</b>
G0268441	2450	each	<b>\$1.94</b>
G2232264	2032	2-pack	<b>\$2.13</b>



**VALUE BRAND Coin Cell Batteries**

Button and coin cell batteries provide power for test instruments, calculators, timers, watches, keyless locks, and other small electronic devices. Lithium. 3V.

G2048882	2032	<b>\$0.59</b>
G1568953	2450	<b>\$0.55</b>



**DURACELL Procell Alkaline Batteries**

Engineered for intermittent use so the battery is not expelling energy when the device is off, providing longer life and increased productivity. Economically packaged for professional applications. Procell batteries have a 7 year shelf life (each battery is individually date coded to ensure freshness). Reliable operation in temperatures between -4°F to 129°F. Contains no added mercury.

G2916952	AAA	24-pack	<b>\$8.15</b>
G2205445	AA	24-pack	<b>\$5.69</b>
G1714386	C	12-pack	<b>\$6.29</b>
G1166277	D	12-pack	<b>\$7.99</b>
G2313832	9V	12-pack	<b>\$13.90</b>



**DUAL-LITE Sealed Lead Acid Battery**

Male faston terminal connections. 6V. 4.5Ah capacity. 1¼" w x 1½" d x 3¼" h.

G3937367 **\$6.74**

MORE THAN 400,000 ITEMS ONLINE

**PHILIPS ADVANCE Magnetic Ballast**

For use with one lamp—FC8T9 or FC8T9. Rapid start. Thermal protection. 120V. 25W input. Ballast factor 0.76. Power factor 0.36. Sockets included. 1 $\frac{1}{16}$ "w x 6 $\frac{1}{2}$ "d x 1 $\frac{3}{8}$ "h. G1738037 **\$23.16**

**PHILIPS ADVANCE Centium T12 Electronic Ballast**

Provides energy savings of up to 25% over magnetic models. Rapid-start ballast requires nonshunted sockets. Great with frequent on/off switching cycles. For use with two lamps—F30T12, F34T12 or F40T12. Series wiring. 120/277V. 70 to 72W. 0.62 to 0.26 AAC. Ballast factor 0.85. Power factor greater than 0.98. 1 $\frac{1}{16}$ "w x 9 $\frac{1}{2}$ "d x 1" h. **CONTRIBUTES TO REDUCING ENERGY CONSUMPTION** G1857222 **\$12.55**

**VALUE BRAND Miniature Neon Indicator Lamps**

Primarily for use in auto and instrument indicators. Wire terminal base. 105/125V. 25,000hr average life.

**NE-2H Lamp**

T2 bulb. 0.067W. G3390186 10-pack **\$5.26**

**NE-2 Lamp**

T3 bulb. 0.058W. G2969206 10-pack **\$6.84**

**LEVITON Lamp Socket Extenders**

Extenders increase the lighting coverage of lamps used in recessed and track lighting fixtures. Lamp socket extensions extend incandescent and halogen lamps by 1 $\frac{1}{4}$ ". Two extenders can be used to increase lamp extension further. Medium-base-to-medium-base adapter. Porcelain body performs better in high-heat applications. 250V. 660W.



G2533876 *black phenolic body* **\$1.77**  
G3110651 *white porcelain body* **\$2.35**

**LEVITON Lamp Socket Adapters**

Mogul-to-medium adapters have an aluminum screw shell socket and a porcelain body. 250V. 660W.



G3093413 *standard adapter* **\$2.19**  
G2942475 *4kV adapter* **\$6.26**

**VALUE BRAND Miniature T3 LED Lamp**

Non-dimmable T3 1/4 lamp features a miniature bayonet base. 120V. 0.84W. 7mA. 7 initial lumens. 20,000hr average life. Green light. G5038686 **\$6.58**

**VALUE BRAND Miniature T6 LED Lamp**

Non-dimmable T6 lamp features a candelabra screw base. 120V. 1.2W. 10mA. 8 initial lumens. 20,000hr average life. White light. G5038643 **\$6.86**

**LEVITON Fluorescent Lamp Holders**

Holders feature quickwire push-in connections. 600V. 660W.

**13354-NX Holder**

Slide-on mounting. For use with 2.04" high medium bipin slide-on and screw mount. G0545036 **\$1.86**

**523 Holder**

Snap-in 1.52" diameter mounting. For use with high-output plunger. G2438834 **\$2.29**

**13464 Plunger Holder**

Double pedestal mounting. For use with MFR# 13465. 18 AWG. G0621433 **\$3.09**

**13350-NW Plunger Holder**

Low-profile slide-on mounting. Pedestal recessed double contact socket. For use with high output fluorescent lamps. G1328966 **\$1.67**

**13465 Fixed Holder**

Double pedestal mounting. For use with MFR# 13464. 18 AWG. G1028361 **\$2.69**

**13551-NW Fixed Holder**

Low-profile slide-on mounting. Pedestal recessed double contact socket. For use with high output fluorescent lamps. G2609065 **\$1.83**

**PHILIPS LED T8 Specifier Series Lamp**

Lamps instantly turn "on" with no flicker or buzz and fit into existing linear fixtures. No "on/off" requirements make them ideal for occupancy sensor applications. For indoor use. Non-dimmable. 180° beam angle. Medium screw base (E26). 100 to 277V. 3500K warm light. 22.5W. 2500 initial lumens. 50,000hr average life. 1.3" diameter. 48" length. **CONTRIBUTES TO REDUCING ENERGY CONSUMPTION, RoHS COMPLIANT** G5027136 **\$63.67**

**PHILIPS PAR20 Dimmable LED Lamps**

EnduraLED reflector lamps are for indoor and outdoor use. Dimmable. Medium screw base (E26). 120V. 3000K warm light. 8W. 25,000hr average life. 2 $\frac{1}{2}$ " diameter.

**CONTRIBUTES TO REDUCING ENERGY CONSUMPTION, ENERGY STAR RATED**

G4883663 25° beam angle **\$21.81**  
G4883681 36° beam angle **\$23.59**

**PHILIPS BR30 DimTone LED Lamp**

EnduraLED reflector lamps are for indoor and outdoor use. Dimmable. Medium screw base (E26). 90° beam angle. 120V. 2200-2700K soft white light. 13W. 730 initial lumens. 25,000hr average life. 3.6" diameter.

**CONTRIBUTES TO REDUCING ENERGY CONSUMPTION** G4883715 **\$28.99**

**LEDNOVATION EnhanceLite A19 Omnidirectional Lamp**

Use as 1-for-1 replacements for existing lamps in existing fixtures. Long life and low energy draw provide long-term cost savings. Dimmable. A-line lamp. Medium screw base (E26). 120V. 2700K soft white light. 13.8W. 1100 initial lumens. 50,000hr average life. 2.36" diameter. **CONTRIBUTES TO REDUCING ENERGY CONSUMPTION, RoHS COMPLIANT**

G4996871 **\$50.99**





**HALO Recessed Lighting Trim**  
Housing and lamps are sold separately.

**10P Albalite Lens**

Metal trim with glass lens fits 8" square housing. A19 lamp.

G0691433 **\$12.37**



**170PS Abalite Lens**

Metal trim with glass shower lens fits 6" housing. A19, 40 W lamp.

G2392232 **\$18.22**



**70PS Abalite Lens**

Metal trim with glass shower lens fits 6" housing. A19, 60 W lamp.

G1467426 **\$12.53**



**5001P Baffle Splay**

Metal ring and baffle trim fits 5" housings. Splay design offers wider beam. R20, PAR20, BR30, PAR30 lamps.

G2016454 **\$10.83**



**310P Collex Baffle**

Metal and plastic trim features white ring, black baffle and fits 6" housings. Splay design offers wider beam. PAR30, BR30, R30 lamps.

G0681834 **\$8.59**



**ENERGIZER Industrial LED Headlight**

Headlamp features spot, flood and red beams. ABS body with polycarbonate lens. 36 lm output. Includes reflective pads, hard hat grips and AAA batteries (3).

G1308151 **\$12.30**



**ENERGIZER Industrial Brilliant Beam LED Headlight**

Headlamp features 4 modes and a shatterproof lens. ABS body with polycarbonate lens. 100 lm output. Includes AAA batteries (3).

G4875717 **\$21.88**



**ENERGIZER Hardhat LED Headlight**

Pivoting headlamp features slide-out diffuser and spot to wide angle diffused beam. 4 light modes—red, green and 2 levels of white. ABS body with polycarbonate lens. 70 lm output. Includes AA batteries (3).

G2658424 **\$26.66**



**ACUITY LITHONIA Lens Troffers**

Fluorescent commercial recessed troffers maximize light output for use in offices, schools, healthcare facilities and retail applications. Low-profile design is ideal for restricted plenum applications. Smooth hemmed sides and smooth ends promote easy handling during installation. Instant start electronic ballast. 120/277 V. Acrylic diffuser. For use with F32T8 lamps—NOT included. 24" w x 48" d x 3 3/16" h.

G1902537 3-lamp fixture **\$53.99**  
G2886405 4-lamp fixture **\$53.90**  
G1380443 replacement lens **\$17.99**



**ACUITY LITHONIA Wall Bracket Fixture**

Premium-grade commercial fixture for areas that require contemporary, low-profile lighting. Fixtures feature detachable, hinged electrical service tray for easy installation and maintenance. Mounts horizontally on wall. Electronic ballast. 120/277 V. Snap-in acrylic diffuser. For use with F32T8 lamps—NOT included. 7 1/4" w x 48 7/16" d x 3 1/4" h.

G3194414 2-lamp fixture **\$179.85**  
G3487854 replacement diffuser **\$39.99**

**MAG-LITE Mini Maglites**

Tactical flashlights feature a candle mode. Aluminum construction. Incandescent lamp. 12 lm output. 5 3/4" length. Includes AA batteries (2).

G0172733 black  
G3834722 silver  
G3834713 red  
G3834731 blue  
G3848153 green  
each **\$13.59**




**BAYCO**

**Nightstick Safety-Approved Flashlight**

Designed for the industrial market, flashlight is waterproof and impact resistant. Dual-Light innovation combines a tight focused flashlight beam and a super bright floodlight. ABS plastic construction. LED lamp. 80 lm output. 7" length.

■ ETL STANDARDS  
G1684094 **\$34.88**



**HIGH-INTENSITY PORTABLE SPOTLIGHTS**

Tough, weather-resistant spotlights deliver bright, tight beams of light. Comfortable to use, compact and easy to store.

**BRINKMANN Q-Beam Spot-Flood Spotlight**

Light features a sealed beam lamp. Yellow plastic body. 1,395 lm output. 628 m beam distance. Includes 8' coil cord with lighter plug.

G2853611 **\$27.99**



**BRINKMANN Q-Beam Spot-Flood Light**

Light features a magnetic base and a sealed beam lamp. Black plastic body. 1,395 lm output. 628 m beam distance. Includes 12 V straight cord with lighter plug.

G1053394 **\$38.74**



**BRINKMANN Tuff Max LED Spotlight**

Dual LED spotlight features a pivot head. Gray ABS plastic body. 300 lm output. 197 m beam distance. Includes AA alkaline batteries (6).

G2702411 **\$33.57**



**BRINKMANN Q-Beam LED Rechargeable Spotlight**

Spotlight features night vision. Black ABS plastic body. 675 lm output. 456 m beam distance. Includes AC charger.

G1078016 **\$45.69**



**BRINKMANN Q-Beam Max Million II Rechargeable Spotlight**

Spotlight features 2,000,000 candlepower halogen lamp. Black ABS plastic body. 820 lm output. 593 m beam distance. Includes AC/DC charger.

G1813131 **\$28.92**







**ACUITY LITHONIA LHQM Quantum Exit Sign with Lights**  
Impact-, scratch- and corrosion-resistant thermoplastic housing snaps together with no additional fasteners. Streamlined design is great for above-the-door applications and other tight fits. 6" letter size. Universal mount. LED/Krypton lamp. 10.8W. 6V. Lead calcium battery backup. 2 1/4" w x 5 5/8" d x 9 7/8" h. ■ UL, NFPA, NEC, OSHA STANDARDS  
✔ CONTRIBUTES TO REDUCING ENERGY CONSUMPTION  
G0503526 **\$129.99**



**ACUITY LITHONIA Fluorescent Battery Packs**


Compatible with electronic, magnetic, instant-start, rapid-start and slimline ballasts. Work with switched or unswitched fluorescent fixtures and compact fluorescent downlights to provide at least 90 min of emergency lighting upon loss of normal power. Sealed, maintenance-free nickel-cadmium batteries recharge automatically. Includes pilot light and test switches. Quick disconnect system allows for easy installation and maintenance. 120/277 VAC input.  
■ UL, NFPA, NEC, OSHA STANDARDS

**Power Sentry Thermoplastic Battery Packs**

G#	# lumens	watts	lamp type	dimensions	price
G2647531	300	40	T8, T12	2 3/8" w x 9 3/4" d x 1 3/8" h	<b>\$79.42</b>
G2137913	600 to 700	75	T5, T8, T12, HO, Biax	2 3/8" w x 9 3/4" d x 1 3/8" h	<b>\$119.99</b>
G1633432	1100 to 1400	80	T5, T8, T12, HO, Biax	2 3/8" w x 13 3/8" d x 1 3/8" h	<b>\$150.74</b>

**Contractor Select Steel Battery Pack**

G#	lumens	watts	lamp type	dimensions	price
G0625353	500	40	T8, T12	2 1/2" w x 9 3/8" d x 1" h	<b>\$49.89</b>



**VALUE BRAND Incandescent Task Light**  
Gooseneck light features an 18" flexible arm and 8' cord. Magnetic mount. 120 V. 60 W.  
G3163081 **\$36.87**



**CEP LED String Lights**  
Designed with end-to-end capability. 50' strings feature 18/2 SJTW cord with 5 sockets. 150 lm output. 33 W. 120 V.  
G4309654 **\$269.99**

**ELECTRIX Halogen Task Lamps**

The 25" flexible steel gooseneck delivers light exactly where needed. Includes lamp. 9' cord. 120 V. 20 W. ■ UL STANDARDS

G1045231 *clamp-on mount* **\$91.96**  
G0910892 *magnetic mount* **\$104.24**



**ELECTRIX Halogen Task Lamp**

The 27" gooseneck flexes and maintains most positions. Bolt or clamp-on mount. Waterproof. 9 cord. 120 V. 55 W. ■ UL STANDARDS  
G2463264 **\$229.99**



**WOBBLE LIGHT Portable Work Lights**

Self-righting bases cannot be knocked over, creating stable lighting with no bulb breakage. Requires no setup—just plug in with special plug that allows several lights to be strung together. Internal ventilation system keeps lights cool to the touch. Yellow ABS housing with dust-resistant rocker switch. Polycarbonate dome protects bulb. Provides 360° lighting. 120 V. Each includes a metal halide lamp and convenience outlet. 18" diameter. 36" height.

**15,000 Lumen Output**  
G2063844 *work light* **\$241.99**  
G1000386 *175 W lamp* **\$23.99**  
**40,000 Lumen Output**  
G1673314 *work light* **\$304.99**  
G1637492 *400 W lamp* **\$49.99**



**ACUITY LITHONIA ELM2 Quantum Emergency Light**  
Corrosion-proof, UV-stable thermoplastic housing resists impact, scratches and discoloration. Provides 90 min illumination upon loss of AC power. Brownout protection. Includes maintenance-free, sealed lead-calcium battery. 120/277 V input, 6VDC output. 5.4 W krypton-type lamps (2). Universal-mount. 12 1/2" w x 3 3/4" d x 5" h. ■ NOM, UL, OSHA STANDARDS  
G0950573 **\$34.79**



**ACUITY LITHONIA Contractor Select Series Emergency Light**  
Flame-retardant high-impact thermoplastic housing has snap-fit components for easy installation. Features adjustable lamp heads that provide 90 min illumination upon loss of AC power. Brownout protection. Includes nickel cadmium battery. 120/277 V input. 3.6 VDC output. 3.6 W LED (2). Universal mount. 2 1/4" w x 10" d x 4 1/4" h.  
■ NOM, UL, NFPA, OSHA STANDARDS  
G4312926 **\$22.88**

**ACUITY LITHONIA LED Security Light**  
Building-mounted lighting can be used indoors or out. Rugged, weather-resistant die-cast aluminum housing with bronze finish. Cool white light. 180° viewing angle. 30 W load (max), 120 V.  
✔ CONTRIBUTES TO REDUCING ENERGY CONSUMPTION

**Dusk to Dawn Security Light**  
Photozell automatically turns lights on at dusk and off at dawn.

G2518214 *2 head* **\$124.31**  
G2405952 *3 head* **\$126.84**



**Motion Security Light**  
180° sensors and downward perimeter protection activate lighting whenever motion is detected.

G0362853 *2 head* **\$142.99**  
G1381021 *3 head* **\$144.85**



**CYALUME TECHNOLOGIES SnapLight Lightsticks**  
Simply bend, snap and shake lightsticks for 360° of illumination and visibility during an emergency. Emits no heat, flames or sparks. 4-year shelf life. 12-hour duration. 6" length with hanging hook.

G2948644 *green*  
G0983394 *yellow*  
G2138814 *red*  
G3004601 *orange*  
10-pack **\$9.99**



DIGITAL POCKET THERMOMETERS

Taylor thermometers feature stainless steel stems and LCD displays with "on/off" and "°F/°C" buttons. Batteries included.

**TAYLOR High Temperature Digital Thermometer**

High temperature model features a range of -40°F to 500°F (-40°C to 260°C). Accuracy varies. 4¾" stem. 1.5V silver oxide battery. Includes storage sleeve with clip.

■ NSF STANDARDS  
G3140715 **\$7.95**



**TAYLOR Digital Instant Read Thermometer**

Digital thermometer measures a range of -40° to 392°F (-40° to 150°F). 4¾" stem. 1.5V silver oxide battery.

Includes storage sleeve with clip.  
■ NSF STANDARDS  
G1572365 **\$5.47**



**TAYLOR Classic Instant Read Pocket Thermometer**

Classic thermometer measures a range of -40° to 392°F (-40° to 150°F). 4¾" stem. 1.5V silver oxide battery. Includes protective rubber boot and storage sleeve with clip.

■ NSF STANDARDS  
G0712397 **\$8.04**



**TAYLOR Pro Waterproof Instant Read Thermometer**

Field-calibrated waterproof design features a 5" stem. Anti-microbial plastic storage case inhibits growth of bacterial odor and mold. -40° to 450°F (-40° to 230°C).

±1° accuracy from 0° to 230°F. ±3.6° accuracy above 230°F. 1.5V alkaline battery. ■ NSF STANDARDS  
G1117767 **\$7.93**



**TAYLOR Commercial Anti-Microbial Instant Read Thermometer**

Dishwasher-safe unit is waterproof and features a 2¾" stem. Thermometer can be field calibrated. Anti-microbial plastic storage case inhibits growth of bacterial odor and mold. -40°F to 450°F (-40°C to 230°C). ±2°F or ±1°C accuracy. 3V lithium battery. Includes lanyard.

■ NSF STANDARDS  
G3209595 **\$12.80**



**COOPER ATKINS Cooler Thermometer**

Thermometer features a magnetic back for moveable mounting and self-adhesive tabs for permanent mounting. 1½" dial. -20° to 120°F (-30° to 50°C). ±5°F or ±2°C accuracy.

■ NSF STANDARDS  
G4106882 **\$2.80**



**TAYLOR Commercial Digital Refrigerator/Freezer Thermometer**

Help avoid food spoilage with a thermometer in your refrigerator and freezer. Easy-to-read LCD display features large 0.8" digits. Foldable hanger allows thermometer to hang inside freezer or refrigerator. -4° to 140°F (-20° to 60°C).

±0.1° accuracy. Battery included.  
G4038167 **\$5.52**



**COOPER ATKINS Oven Thermometer**

Stainless steel housing with 2" dial featuring an HACCP reference. Thermometer can hang or stand. 100° to 600°F (50° to 300°C).

±25°F accuracy.  
■ NSF STANDARDS  
G4059307 **\$4.29**



**REOTEMP Compost Dial Thermometer**

Thermometer features a bimetal sensing element and plain bushing back connection. Stainless steel construction with plastic lens. 2" dial. 200° stem. 0° to 200°F. ±1% accuracy.

G4025427 **\$19.04**



**MILJOCO Bimetal Thermometer**

Rear connected thermometer features a compact design. The hermetically-sealed, stainless steel case prevents moisture from entering into the instrument and fogging the lens. Polycarbonate lens. ¼" NPT stainless steel connection. 0° to 250°F (-20° to 120°C).

±1% accuracy.  
G3160805 **\$9.75**



**TAYLOR ClearVu Rain Gauge**

Gauge clearly measures rain water up to 5" in 0.1" graduations. Polycarbonate construction. 12½" overall height. Mounts with keyholes (2).

G2090261 **\$5.99**

**BACHARACH Sling Psychrometer**

Slide rule calculator correlates wet and dry bulb thermometer indications for direct reading of relative humidity. One-piece design prevents fly-away—thermometer case telescopes into handle for protection. Dual range for better resolution. 10 to 100% relative humidity (±5% accuracy). 25° to 120°F (±1° accuracy). Red spirit liquid fill.

G1810846 *psychrometer* **\$39.99**  
G0291121 *replacement thermometer* **\$28.43**



**VALUE BRAND Pressure Gauges**

Use with air and noncorrosive fluids such as water and oil in pumps, filters, compressors and regulators. Liquid-filled gauges are filled with glycerin to reduce pulsation and pointer vibration. ABS plastic housing with acrylic lens. 2" dial. ¼" NPT back connection. -40° to 150°F operating temp. ±3-2-3% accuracy.

Z#	psi	kPa	graduation	price
G0038753	0 to 100	0 to 700	2 psi	<b>\$12.39</b>
G0038762	0 to 160	0 to 1,100	5 psi	<b>\$12.39</b>
G0038771	0 to 200	0 to 1,400	5 psi	<b>\$12.39</b>
G0038796	0 to 400	0 to 2,800	10 psi	<b>\$12.39</b>



MORE THAN 400,000 ITEMS ONLINE





**PHILIPS ADVANCE Ballast Checker**

Handheld device confirms ballast type and status from up to 15'. Point device at fixture and LED turns green if light source is powered by an electronic ballast; turns orange if powered by an electromagnetic ballast. Compact unit is 4½" x 2¼". Includes battery and lanyard.

G2471217 **\$42.93**



**VALUE BRAND Mortar and Pestle**

Mortars are glazed on the outside only. Pestles feature a porcelain glaze on grinding surface.

- G4168455 60 mm diameter (80 mL) **\$2.90**
- G4109682 75 mm diameter (125 mL) **\$3.45**
- G4160712 100 mm diameter (300 mL) **\$4.05**
- G4156582 125 mm diameter (500 mL) **\$4.83**

**BEL-ART SCIENCEWARE Micro Spatulas**

Double-ended spatulas feature FEP-coated stainless steel, non-slip handle and non-stick end. 300°F (148°C) working temperature.

■ FDA STANDARDS ► MORE SIZES ONLINE

**Tapered End**


⅛" diameter. 7½" length. 0.105" handle diameter. ⅜" taper.

G4073763 2-pack **\$21.00**

**Straight End**

⅛" diameter. 7¼" length. 0.156" handle diameter.

G4709345 2-pack **\$58.91**

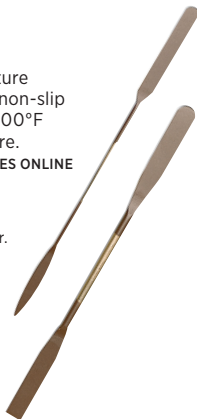

**HANNA Mini Magnetic Stirrer**

Mixes up to 1 liter. ABS housing. Speedsafe. Includes 25mm magnetic stir bar. 100 to 1000 rpm. 110 V. 4.8" w x 4.8" d x 1.8" h.

G4057322 **\$79.61**

**MICRO ESSENTIAL**

**Hydriox Spectral Plastic pH Strips**

Test strips provide instant, easy-to-read results, with bright, long-lasting single-color matches across the entire pH range. 2¾" x ¼" strips are packaged in convenient flip-top vials, complete with matching color charts.

- G4144831 0 to 6 pH
- G4174834 5 to 9 pH
- G3940991 6.5 to 13 pH
- G3979132 5.5 to 8 pH
- G4029453 0 to 14 pH

100-pack **\$12.99**



**VALUE BRAND Wide Mouth Wash Bottles**

Nozzled squeeze bottles provide quick, handy cleanout of laboratory glassware and plasticware. LDPE construction. 500 mL. 16 oz. ► MORE SIZES ONLINE

**Clear Cap**  
G1944415 **\$2.91**

- Colored Caps**
- G2539311 blue
- G3408702 green
- G0797282 red
- G3043957 yellow

each **\$3.12**



**LABCHEM Deionized Water**

H2O formula. 7732-18-5 CAS number. Not to be used with food.

■ ASTM STANDARDS

- G4524161 4 L poly bottle **\$14.89**
- G4532236 20 L cubitainer **\$47.83**

**AIR-TITE Reusable Glass Syringes**  
For use with hypodermic needles.

**Glass Luer**

- G4824075 1 mL **\$8.79**
- G4822754 3 mL **\$8.89**
- G4824093 5 mL **\$8.99**
- G4824102 10 mL **\$9.99**

**Metal Luer Lock**

- G4824154 1 mL **\$11.47**
- G4824172 3 mL **\$11.65**
- G4824181 5 mL **\$11.82**
- G4822763 10 mL **\$11.99**



**EXTECH Coating Thickness Tester Kit**

Tester provides automatic substrate recognition—magnetic induction for ferrous substrates, eddy current measurement for nonferrous. Features two measuring modes, two working modes and memory storage of 400 readings.

User-settable high/low alarms. Min/max/average measurement. 1- or 2-point calibration. 0 to 49 measuring range. ±3% reading + 0.04 mil ferrous. ±3% reading + 0.06 mil non-ferrous.

G2001982 kit **\$259.99**  
kit includes: AAA batteries (2), USB interface cable, software, calibration iron, calibration aluminum, precision standards, carrying case, instructions



**BEL-ART SCIENCEWARE Space Saver Vacuum Desiccators**

'Space Saver' desiccators will hold a full vacuum at room temperature for 24 hours and remain airtight even if not under vacuum. Polypropylene stopcock with PTFE plug accepts ¼" tubing.

Q #	inside diameter	overall diameter	overall height	overall length	price
G4655463	6¾"	8¾"	5½"		<b>\$45.99</b>
G4688047	10¾"	12¾"	9½"		<b>\$114.99</b>



**BEL-ART SCIENCEWARE Acrylic Desiccator Cabinet**

Designed to provide low humidity and particulate-free storage on the bench top or in refrigerator or freezers. Slide-in trays make sample removal simple and are perforated for best air circulation. 0.21 cu-ft capacity. 12" w x 12" d x 12" h. Clear.

G4689176 **\$420.88**





**GENERAL Soil pH Tester**

Instantly reads soil or compost acidity. Analog display—no batteries needed. Includes plant pH chart. 3 to 10 pH range.

G2311696 **\$7.79**

**GENERAL Soil Moisture Meter**

Instantly indicates watering needs by checking for adequate moisture. Analog display. Includes plant watering and light chart.

G2472601 **\$7.76**

**NUPLA Soil Probe/Locator**

Tools are used to locate below-ground pipes and conduit. T-grip fiberglass handle with metal tip that protects fiberglass shaft.

G1276037 4' probe **\$27.92**

G3904476 5' probe **\$23.59**

G4239742 replacement tip **\$5.99**



**GENERAL Jumper Lead Set**

Easy-to-use multicolored test leads feature shielded alligator clips on both ends. 22 AWG wire gauge. 300V rating. 18" length.

G2042573 set **\$6.90**

set includes: white (2), red (2), black (2), yellow (2), green (2)

**SUPCO SL Series Mini Datalogger**

Selectable PC-control, delayed start and push-button start/stop recording options. Stop-when-full and continuous rollover memory settings. Display choice of °F or °C. USB interface. Compatible with Windows 98 and higher. 1s to 18 hr sample interval. Includes cable and software. -40° to 160°F. 3 V. 3" w x 1½" d x 2½" h.

G0304044 **\$61.57**



**LAMOTTE ColorQ PRO 7 Photometer Kit**

Designed for professionals to measure seven primary pool and spa tests directly on a digital display. Test factors include free chlorine, total chlorine, bromine, pH, alkalinity and calcium hardness. No color matching—easy push-button control.

G0856274 kit **\$113.84**

kit includes: reagents for 144 tests, reagents for 50 cyanuric acid tests, sample vials, AA batteries (2), carrying case, instructions



**AMPROBE ACD-10 Plus Digital Clamp Multimeter Kit**

Digital instrument features LCD display, audible continuity, auto ranging and data hold. Extra-thin jaws. 600 VAC (max). 600 AAC (max). 40 ohm max. 1" jaw capacity. 4,000 counts.

G2943263 kit **\$79.95**

kit includes: multimeter, test leads, battery, soft carrying pouch, manual



**AMPROBE ACD-14 Plus Clamp-On Multimeter Kit**

Digital instrument features dual LCD displays, audible continuity, auto ranging and data hold. Features 0 to 2000 µAAC and DC ranges. 600 VAC (max). 600 AAC (max). 40 ohm max. 1" jaw capacity. 4,000 counts.

G1115283 kit **\$129.95**

kit includes: multimeter, test leads, battery, soft carrying pouch, manual, type K bead thermocouple with banana plug



**AMPROBE PM51A Digital Multimeter**

Meter displays large digits with icons. Autoranging. Test leads attached for convenience. Battery included. 600 VAC/VDC (max). 10 AAC/DDC (max). 40 megaohm resistance. ±0.8% + 3 digits DC accuracy. 4,000 counts. ■ CE, UL STANDARDS

G2222945 **\$39.95**



**AMPROBE DM78C Digital Multi-Tester**

Meter displays digits and analog bargraph. Features polarity indication. Test leads, battery and pocket-size carrying case included. 600 VAC/VDC (max). 10 AAC/DDC (max). 34 megaohm resistance. ±1% + 2 digits DC accuracy. 3,400 counts. ■ CE, UL STANDARDS

G1547052 **\$44.95**



**EXTECH Temperature and Humidity USB Data Logger**

Monitors humidity and temperature levels in warehouses, storage rooms, freezers and shipping vans for water damage restoration. USB connector easily plugs into a computer for data analysis of temperature and humidity. Datalogs 32,000 readings. Dew point indication via Windows software. Selectable data sampling rate—2s to 24 hr intervals. User-programmable alarm thresholds for RH and temperature. Status indication via red/yellow LED and green LED. Includes 3.6V lithium battery, USB cap, software and instructions. 0 to 100% relative humidity. -40° to 158°F dew point. 5.1" w x 0.9" d x 1.1" h.

G1752685 **\$89.99**



**EXTECH Humidity/Temperature Data Logger**

USB interface for easy setup and data download. Dew point indication via Windows software. Selectable data sampling rate—2s to 24 hr intervals. User-programmable alarm thresholds for RH and temperature. LCD displays current readings, min/max and alarm status. Includes 3.6V lithium battery, mounting bracket with combination lock, USB cable, software, instructions. Records up to 16,000 readings for each parameter. 0 to 100% relative humidity. -40° to 158°F. Calculated dew point. 1.9" w x 1.2" d x 3.7" h.

G1153372 **\$139.99**



**EXTECH Temperature and Humidity Data Logger**

Triple LCD displays humidity, temperature and date (year, month, day). Programmable from keypad or PC. Selectable data sampling rate—1s to 12 hr intervals. User programmable audible and visual alarms. Wall, desktop or tripod mount. Includes software, USB cable, 110 VAC adapter and AA batteries (4). 0 to 100% relative humidity range. -4° to 144°F dew point. 4.75" w x 1.5" d x 3.5" h.


G1440485 **\$219.99**



**FLUKE VoltAlert Voltage Detectors**

Pocket-size testers are easy to use—touch the tip to a terminal strip, outlet or cord. Tip glows red and unit beeps, verifying voltage in the line. Electricians, maintenance, service, safety personnel and homeowners can quickly test for energized circuits and defective grounds on the factory floor, in the shop or at home. Batteries and instructions included. ■ CAT IV 1000V

G2002104 90 to 1000 VAC **\$29.95**  
G0343585 20 to 90 VAC **\$29.95**



**FLUKE SureGrip Insulated Test Leads**

Rubber overmolded surfaces and finger-hugging curves provide a comfortable, steady grip that does not distract from obtaining an accurate measurement. DMM test leads with safety shrouded, standard diameter banana plugs. Right angle connector on one end and straight connector on the other. Reinforced strain relief. 10 A max. 59" length. ■ CAT IV 600V, CAT III 1000V, UL STANDARDS

G2041173 pair **\$24.95**



**FLUKE Voltage Detector**

Non-contact AC voltage detector combines with a LED flashlight in one convenient, compact design. Features visual indication and "on/off" switch. 40 to 300 VAC. Includes clip, AAA battery and instructions.

G3093553 **\$24.95**



**GREENLEE Voltage Detectors**

Personal safety tools detect live AC voltage without contact to wire. Includes batteries. Audible and visual indication. Thumb switch.

■ CAT IV 1000V

**Self-Testing**

Features auto turn off. 50 to 1,000 VAC.

G3315024 **\$13.60**

**Adjustable**

Identifies hot and neutral conductors. 5 to 1,000 VAC.


G0433876 **\$17.88**



**FLUKE Hard Point Test Lead Set**

Leads provide superior performance and durability, with advanced strain relief and increased strand count for higher conductance and flexibility. Comfort-grip ergonomic design. PVC insulated test leads with right-angle shrouded banana plugs. Recommended for general-purpose measurements. 1,000 VAC (max). 10 A (max). 48" length. ■ CAT III 1000V, CAT IV 600V, UL STANDARDS

G3377464 pair **\$22.45**



**DANIEL WOODHEAD Receptacle Tension Tester**

Tests the spring contact tension for standard straight-blade receptacles. Safe to use on energized receptacles. Impact-resistant nylon housing. Includes carrying case. 2 to 24 oz tension range.

■ NFPA STANDARDS  
G0494943 **\$72.42**



**LOVE TS2 Digital Temperature Switches**

Switches feature set point adjustments, static defrost timing, compressor mean time, hysteresis and ambient probe adjustment. Each includes gasket and mounting clips. IP64 front panel with 3-digit LED display and 2.8" x 1.14" cutout. SPDT relay. Thermistor sensor. ±1% full scale accuracy. ¾HP.

**-50 to 150°C Temperature Range**

G0409771 24 VAC/DC **\$54.55**  
G2111207 230 VAC **\$44.90**

**-58 to 302°F Temperature Range**

G1313347 24 VAC/DC **\$44.90**  
G1155384 110 VAC **\$44.90**



**EXTECH EzFlex Combustible Gas Detector**

Handheld service instrument helps identify unsafe concentration of gas near furnaces and other equipment. Detects natural gas, propane, methane, gasoline, industrial solvents, lacquer thinners and naphtha. Includes C batteries (3). 16" flexible gooseneck is great for accessing hard-to-reach locations. Audible and visual indicator.

G1592577 **\$129.99**



**IMPERIAL Service Manifolds and Gauges**

Precision flutter- and pulsation-resistant gauges with protective boots. PolarShield high-pressure barrier hoses. For use in air conditioning and stationary refrigeration applications. ■ UL STANDARDS

**400 Series**


2-valve brass manifold. 60" hoses (3).

G2128472 use with R-410A, R-22, R-404A **\$72.44**

**600 Series**

4-valve manifold. 60" hoses (4).

G2076855 use with R-404A, R-507, R-134A **\$189.95**  
G1863784 use with R-410A, R-22, R-404A **\$89.95**



**FLUKE CARRYING CASES**

Fluke offers a wide variety of cases specifically designed to fit and protect test instruments. Here are just a few...

**FLUKE Soft Carrying Cases**

Compatible with Fluke 20, 70, 11X, 170 Series DMMs and other similar format test tools. Durable polyester construction.

**C35 Soft Carrying Case**

Case top opens laterally to allow use of test tool without removing it from the case and includes a strap to secure the test tool. 5" w x 7 3/4" d x 1 1/4" h

G2465915 **\$22.45**

**C115 Soft Carrying Case**

Includes two padded pockets for protection of two test tools and a pouch for test leads and other accessories. 7" w x 9" d x 2" h.

G3058571 **\$29.95**



**C116 Soft Carrying Case**

Includes adjustable padded space with a moveable divider for protection of two test tools. 8 3/4" w x 8 3/4" d x 2" h.

G3326005 **\$34.95**



**C345 Soft Case**

Movable internal divider provides flexibility for odd-sized items like test gauges and current probes. Case features an outer pouch, outer zipper pocket and two slash pockets. Detachable, extendable shoulder strap included. 8" x 14" x 9 1/2" h.

G2752416 **\$84.95**

**FLUKE Extreme Case**

Perfect cases for protecting Fluke handheld test tools in extreme work environments. Includes an automatic purge valve for quick equalization after changes in atmospheric pressure. Features an exclusive ¼" neoprene O-ring and ABS latches for excellent seal. For use with the following test tools—air quality (922), insulation testers (1500 series), multimeters (70 and 110 series), process tools (710 series and 787), temperature (50 series). 12 1/2" w x 11" d x 5" h.

G2137457 **\$189.95**







# FANS & HVAC

NEED HEATERS, FANS, MOTORS OR BLOWERS?  
ZORO HAS EVERYTHING YOU NEED *AND* MORE!

You'll be blown away by this product selection... You can heat, cool, humidify, de-humidify, ventilate, filter and control any environment! Zoro has what you need for residential, office and industrial spaces—including replacement parts for when equipment heads south! With over **20,000** HVAC products available on our website, you'll find the equipment and parts you're looking for.

THERMOSTATS  
// page 63, 68



CLEANERS  
// page 69



MOTORS  
// page 66, 68



WALL FANS  
// page 61, 64

DEHUMIDIFIERS  
// page 62, 64



INDUSTRIAL FANS  
// page 61


## POPULAR BRANDS



BLOWERS  
// page 66



DUCTWORK  
// page 67



PORTABLE BLOWERS  
// page 61, 65





**AIR KING Clip-On Fan**  
 Clip-on air circulator features whisper quiet operation, 2-speeds, adjustable vertical tilt and 360° head pivot. 6" polypropylene propeller. 6' cord. 7¼" w x 6¼" d x 11½" h.  
 ■ ETL, OSHA STANDARDS  
 G1492897 **\$14.99**



**AIR KING Compact Table Fan**  
 Fan features whisper-quiet operation, 2-speeds and adjustable vertical tilt. 6" polypropylene propeller. Non-oscillating. 6' cord. 7¼" w x 6¼" d x 9¾" h.  
 ■ OSHA, ETL STANDARDS  
 G0282572 **\$15.52**



**AIR KING Personal Blower**  
 This space-saving task fan features 2-speed manual control operation and a 3" blower wheel. Non-oscillating. 6' cord. 5½" w x 7" d x 6½" h.  
 ■ ETL, OSHA STANDARDS  
 G3184641 **\$26.79**



**AIR KING Wall Fans**  
 Wall-mounted fans offer 3-speed rotary knob and pull-cord operation. Polypropylene propeller. Includes mounting hardware. Oscillating. 6' cord.  
 G2702481 12" propeller **\$31.59**  
 G2383911 16" propeller **\$35.99**  
 G0584473 18" propeller **\$43.99**



**AIR KING Residential Pedestal Fans**  
 Fans feature an adjustable height with impact- and chemical-resistant polypropylene propellers. Tilting fan heads oscillate 90° side to side and can lock in position. 18" polypropylene propeller. 6' cord.  
 ■ OSHA, ETL STANDARDS

**Standard**  
 Fan features 3-speed rotary knob operation. Fan height adjusts from 37" to 53".  
 G1647256 **\$41.03**

**Remote Controlled**  
 Fan features 3-speed manual and remote control operation. Fan height adjusts from 42" to 50".  
 G1423861 **\$56.69**



**AIR KING Window/Floor Fan**  
 Pivoting tilt fan features 3-speed manual control for both intake and exhaust use. Fan fits in front of screen in windows with a minimum width of 7" and height of 18½". 14" propeller. 6' cord. 18" w x 7" d x 19½" h.  
 ■ ETL, OSHA STANDARDS  
 G1176743 **\$46.99**



**AIR KING Portable Box Fan**  
 Quiet, high-volume air mover features chemical-resistant propellers. Wide-body steel housing features carrying handle and 3-speed selection knob. 20" polypropylene propeller. 6' cord. 22¼" w x 6¾" d x 21¼" h.  
 ■ ETL, OSHA STANDARDS  
 G3328683 **\$26.79**



**AIR KING Filtered Box Fan**  
 Portable air circulator has three selectable filtration volumes—filters dust, smoke, pollen, pet hair, spores and more. Includes high-capacity pleated media filter G3775843. 20" polypropylene propeller. 6' cord. 21¼" w x 6¾" d x 22¾" h.  
 ■ ETL, OSHA STANDARDS  
 G1101904 **\$43.99**



**AIR KING Window Fan**  
 Fan features three reversible speeds. Extender side panels allow fan to fit windows 26½" to 34½" wide and 22" high. Storm Guard feature enables window to be closed behind fan during inclement weather. 16" electrically reversible propeller. 7' cord. 18¼" w x 7" d x 22" h.  
 ■ ETL, OSHA STANDARDS  
 G0842457 **\$78.99**

**FANTECH Bathroom Exhaust Fan**  
 Fan mounts horizontally and features galvanized steel housing with a polymeric grille. Includes hanger bars. Side discharge. 4" duct diameter. 9½" w x 9½" d x 8½" h housing. 110 cfm. 0.7 sones. ENERGY STAR RATED  
 G4967304 **\$97.29**



**BROAN Through-the-Wall Exhaust Fans**  
 Fans are controlled by a separate wall switch, timer or speed control remotely mounted on the wall. Adjustable steel housing with white plastic grille. Housing measures 14½" wide, 14¼" high and adjusts from 4½" to 9½" deep to accommodate various wall depths.  
 G0571803 8½" duct (180 cfm) **\$50.53**  
 G2783907 10½" duct (270 cfm) **\$118.93**



**BROAN Speed Control**  
 Adjustable speed control fits single-gang box and is for use with all Broan fans with appropriate amp rating. Features a built-in radio noise suppressor. White with matching switch plate. 120V. 3A (max).  
 ■ UL STANDARDS  
 G2586613 **\$14.92**



**BROAN Timers**  
 Timers feature a 0 to 60 minute adjustable control with a continuous "on" position option. White with matching switch plate. 120/240V. 20/10A (max).  
 ■ UL STANDARDS

**Adjustable Timer**  
 Timer fits single-gang box.  
 G0501566 **\$29.99**



**Mechanical Timer**  
 Timer fits double-gang box and features a on/off rocker switch.  
 G1313855 **\$35.99**



**DAYTON Portable Blower**  
 Three-speed, heavy-duty utility air mover is designed to quickly dry wet carpets, upholstery and floors. Three operating positions allow user versatility for a variety of applications. Lightweight portable design features a convenient top carry handle. Units are equipped with a cord wrap and are stackable. Polypropylene construction features two power outlets for connecting multiple units. 6½" thermoplastic propeller. 500/300/250 cfm. 9½" w x 12¾" d x 13¼" h.  
 G1644571 **\$102.75**



**FRIGIDAIRE Window Air Conditioners**

Window air conditioners feature 24-hr timer, low-voltage startup, energy saver function and convenient and attractive central control panel. Each includes a window-mounting kit with expandable side or top panels. Electronic control with remote. Antibacterial filter. Fixed chassis. 120 V. ■ UL/CUL, AHAM STANDARDS  
 ✓ ENERGY STAR RATED



**2-Speed**  
 4-way air flow. 5,200 BtuH. 10.7 EER. 16" w x 15 1/4" d x 12" h.  
 G3909193 **\$182.97**

**3-Speed**  
 Remote built-in thermostat to maintain temperature at location of remote. 8-way air flow. 12,000 BtuH. 10.8 EER. 19" w x 21 1/2" d x 14 3/8" h.  
 G4019845 **\$299.99**



**DAYTON Portable Evaporative Cooler**  
 Portable evaporative cooler humidifies, filters, freshens and circulates air throughout the year. Unit features float bulb, overflow water tube, adjustable louvers and casters. Galvanized steel construction. 10' cord. 2-speed. 3600/2376 cfm. 115 V. 6.5/3.6 A. 10.4 gal water capacity. 1,000 to 1,400 sq-ft cooling capacity. 28 3/8" w x 28 3/8" d x 36 3/8" h.  
 G3607082 **\$612.54**



**DAYTON Electric Space Heater**  
 Ceramic heater is safe and powerful, designed to add supplemental heat to a room after a few minutes of operation. Designed to ensure your safety, this ceramic heater includes an overheat protection system that consists of a safety tip-over switch, an overheat thermal cutoff protector and an inlet air sensor. Heater features push-button controls and LED display. Two heat setting plus a "fan only" option. Fan forced. Oscillating. 6' cord. 120 V. 12.5/7.0 AAC. 1,500/900 W. 5,118/3,071 BtuH. 8 1/2" w x 7 7/8" d x 10 7/8" h.  
 ■ UL/CUL STANDARDS  
 G1198827 **\$79.93**


**DAYTON Dehumidifier**  
 Dehumidifier is rugged and compact, providing dependable trouble-free service. For use in residential areas. Digital display shows ambient % humidity and setpoint. Includes drain hose adapter for 3/4" garden hose. 6' cord. 2-speed. Automatic defrost. Washable, slide-out filter. 115 V. 60/90% relative humidity. 65 pt/day. 15 1/2" w x 12 5/8" d x 24 1/2" h.  
 ■ UL STANDARDS  
 G1143283 **\$393.01**



**DAYTON Plug-In Humidity Controllers**  
 Humidity controls provide user-set dew point control of humidification, dehumidification or ventilation equipment. Plug-in outlet with piggyback. 120 V. 2 7/8" w x 2 5/8" d x 5 1/2" h.  
 ■ ETL STANDARDS

**Humidifier Controller**  
 Opens on humidity rise, closes on fall.  
 G0627006 **\$61.17**

**Dehumidifier Controller**  
 Closes on humidity rise, rises on fall.  
 G3370446 **\$61.17**

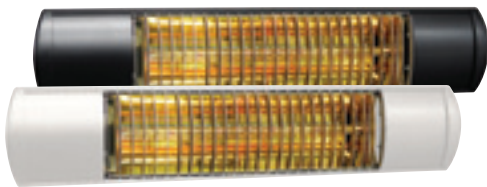

**DAYTON Cosy XL Series Electric Infrared Heaters**  
 Low-profile design is certified for low clearance installation such as under an awning. Waterproof for indoor or outdoor use. Includes mounting hardware, safety grills, warm glow emitters and 15' cord. Higher performance due to 90% radiant efficiency. Features 99% reflective surface and optimized parabolic reflector. 6061 aircraft aluminum housing with epoxy powder coat. Wall, ceiling or suspended mount. 50° beam pattern. Single phase. 120 V. 12.5 A. 1,500 W. 5,120 BtuH. 6" w x 22" d x 5" h.  
 G4298734 white **\$419.50**  
 G4316566 black **\$419.50**



**DAYTON Electric Space Heater**  
 Heater features over-temperature safety cutoff and tip-over switch. The pilot light glows when heater is operating. The thermostat control and fan-only operation features allow versatility and efficiency of operation. Fan forced. Chrome grilles. 6' cord. 120 V. 12.5/10.8 AAC. 1,500/130 W. 5,118/4,436 BtuH. 8" w x 10" d x 16" h.  
 ■ UL/CUL STANDARDS  
 G0600451 **\$70.88**

**DAYTON Electric Radiant Heater**  
 Oil-filled heater is safe and powerful, designed to add supplemental heat to a room after a few minutes of operation. Overheat protection and safety tip-over switch ensure safe heating. Heater features three heat settings, digital display, timer for "on/off" delay and thermostat. Includes casters and 6' cord. 120 V. 12.5/7.0/5.0 AAC. 1,500/900/600 W. 5,120/3,071/2,047 BtuH. 5 3/4" w x 14 3/4" d x 23 1/2" h. ■ ETL STANDARDS  
 G2598696 **\$127.67**





**DAYTON Whole House Fans**

Dayton whole house ventilating fans cool and ventilate the entire home by removing hot, stale air through the attic and drawing in cooler outside air. Fans are fully assembled. 2-speed wall switch allows selection of desired air delivery volume. 12-hour timer with hold function turns the fan off at a predetermined time or will provide continuous operation. Gasket between the venturi and plenum box reduces noise. Horizontal mount. Requires shutter for new installations. Belt drive. Galvanized steel housing. ■ **UL/CUL STANDARDS**



Q#	propeller	cfm (high/low)	amps	watts	HP	fan rpm	width	depth	height	coverage	price
G1681671	24"	3,700/1,610	6.2/3.9	529/279	½	529/230	28"	28"	23"	850 sq-ft	<b>\$437.41</b>
G0456102	30"	6,510/4,280	5.8/2.8	522/243	¾	519/341	34"	34"	24"	1500 sq-ft	<b>\$460.65</b>
G2204255	36"	10,820/7,290	7.0/4.1	685/325	½	472/318	40"	40"	26"	2500 sq-ft	<b>\$533.69</b>
G1553982	42"	11,370/7,600	6.6/3.9	543/265	½	359/240	46"	46"	26"	3000 sq-ft	<b>\$603.41</b>

**VALUE BRAND Pleated Air Filters**

Filters are 5-times more efficient than fiberglass. 100% synthetic construction does not shed fibers. Die-cut chipboard frame is moisture resistant.



Rated to 150°. ■ **UL STANDARDS**

● **MUST BE ORDERED IN MULTIPLES LISTED BELOW FOR SAFE SHIPPING**

**MERV 7**

Standard-capacity filters improve air quality and keep resistance within reasonable operating limits.

Q#	width	depth	height	qty	price
G3774267	25"	1"	16"	12-pack	<b>\$3.89EA</b>
G3774407	20"	1"	20"	12-pack	<b>\$3.99EA</b>
G4638146	20"	2"	16"	12-pack	<b>\$2.79EA</b>
G4638155	25"	2"	16"	12-pack	<b>\$2.99EA</b>
G4638164	20"	2"	20"	12-pack	<b>\$2.99EA</b>
G4638173	25"	2"	20"	12-pack	<b>\$3.29EA</b>
G4638182	24"	2"	24"	12-pack	<b>\$3.49EA</b>
G3756042	20"	4"	16"	6-pack	<b>\$7.09EA</b>

**MERV 8**

High-capacity filters offer 50% more surface area than standard—extending service life by 30% to 50%—providing reduced resistance and lower energy and maintenance costs.

● **CONTRIBUTES TO REDUCING ENERGY CONSUMPTION**

Q#	width	depth	height	qty	price
G4638191	20"	2"	16"	12-pack	<b>\$4.99EA</b>
G4638207	25"	2"	16"	12-pack	<b>\$5.99EA</b>
G4638216	20"	2"	20"	12-pack	<b>\$5.99EA</b>
G4638225	25"	2"	20"	12-pack	<b>\$7.99EA</b>
G4638234	24"	2"	24"	12-pack	<b>\$7.49EA</b>

**DAYTON**

**Residential 95+ AFUE Multi-Position Gas Furnaces**

Furnaces feature electronic hot surface ignition and 100% shut-off main gas valve. Built-in, high-level self diagnostics with fault code displays standard on integrated control module. Timed-on, adjustable-off blower capability. Blower-off delay for cooling SEER improvement. 4-speed direct drive PSC motor. Inducer rotates for easy conversion of venting options. Quarter-turn knobs provided for easy door removal. Natural gas—convertible to LP gas. 120 V. ■ **GAMA, CSA STANDARDS** ● **ENERGY STAR RATED**



Q#	input (BtuH)	output available (BtuH)	cooling tons	air flow	width	depth	height	supply opening	bottom filter	price
G3319102	80,000	76,000	1½ to 3	1200 cfm	17½"	29½"	33"	17½" x 20"	16 x 25	<b>\$1301.44</b>
G2790654	80,000	76,000	1½ to 4	1600 cfm	21"	29½"	33"	19½" x 20"	20 x 25	<b>\$1214.29</b>
G2142244	100,000	95,000	1½ to 5	2000 cfm	21"	29½"	33"	19½" x 20"	20 x 25	<b>\$1276.54</b>

**DAYTON Ceiling Shutters**

Ceiling shutters fit flush in ceiling opening below whole-house fans. Tie rods at each side of shutter assure uniform opening when fan is operating. White extruded aluminum frame features 1½" flange and ¾" mounting holes. White louvers have felted edges. Gravity operated. Single panel. Horizontal mount.

**Economy Ceiling Truss Shutters**

Truss shutters install without framing or cutting ceiling joist. Nylon fasteners offer quiet operation. 1500 fpm (max).



Q#	fits fan	opening required	free area (sq-ft)	price
G2484684	36"	35½" x 34"	7.126	<b>\$85.32</b>

**Premium Ceiling Shutters**


Louvers are reinforced with a galvanized steel strip. 2250 fpm (max).



Q#	fits fan	opening required	free area (sq-ft)	price
G1930686	24"	24" x 24"	3.112	<b>\$81.67</b>
G1804616	30"	30" x 30"	4.652	<b>\$90.01</b>

**HONEYWELL Bypass Humidifier**

Use with forced-air furnace systems to provide whole-house humidification. Requires floor drain or drain pump for overflow. 6" diameter duct connection. Mount on warm air supply or cold air return. Units include self-piercing saddle valve, 24 V transformer, summer shutoff damper, antimicrobial humidifier pad and mounting template. 120 V.



**3,000 Square-Foot Capacity**

G2300584	humidifier	<b>\$139.61</b>
G2681314	replacement pad	<b>\$12.49</b>

**4,000 Square-Foot Capacity**

G0506247	humidifier	<b>\$155.30</b>
G2901683	replacement pad	<b>\$11.72</b>

**DAYTON Thermostat Controlled Attic Ventilator**

Fans are designed for fast, easy installation in a 13" x 13" opening. 1600 sq ft attic (max). Thermostat mounts on 2" x 4" conduit box and controls 90° to 130°F with a 15°F fixed differential. Totally enclosed motor. 12" gable mount with tie-rod shutter and guard. ½ HP. 120 V. 1.4 A. 800 cfm. ■ **UL/CUL, OSHA STANDARDS**



G2667743 **\$197.96**

**COLUMBUS ELECTRIC Attic Fan Thermostat**

Thermostat mounts to a standard 2" x 4" vertical box. Cooling only. 80° to 130°F. 120 to 240 VAC. 13.8 A @ 120 V. 10 A @ 240 V. SPST switch. 2½" w x 2½" d x 4¾" h.

■ **UL STANDARDS**  
G1081245 **\$18.99**

**EMPIRE Wind-Driven Turbine Ventilator**

Removes hot attic air in summer and moisture-laden air in winter. Galvanized steel construction with aluminum bracing. Oilless bronze top bearing and bottom thrust-type ball bearing. Requires base for new installations. 631 cfm @ 4 mph wind. 12" throat diameter. 10¼" d x 10¼" d x 12" h.

G2962032 **\$45.99**




**EMPIRE Ventilator Base**

Attic ventilator base allows vertical mounting of ventilator on 8/12 to 7/12 pitch roofs. For use with turbine ventilators that have a 12" throat diameter. Includes 20" x 20" flashing for weatherproof installation. Galvanized steel construction. 10" height.

G0895465 **\$16.99**





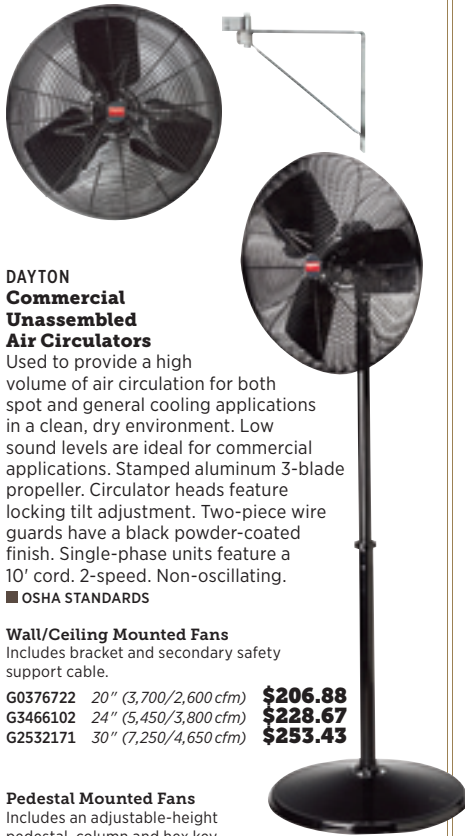

**DAYTON Commercial Unassembled Air Circulators**

Used to provide a high volume of air circulation for both spot and general cooling applications in a clean, dry environment. Low sound levels are ideal for commercial applications. Stamped aluminum 3-blade propeller. Circulator heads feature locking tilt adjustment. Two-piece wire guards have a black powder-coated finish. Single-phase units feature a 10' cord. 2-speed. Non-oscillating. ■ OSHA STANDARDS

**Wall/Ceiling Mounted Fans**

Includes bracket and secondary safety support cable.

- G0376722 20" (3,700/2,600 cfm) **\$206.88**
- G3466102 24" (5,450/3,800 cfm) **\$228.67**
- G2532171 30" (7,250/4,650 cfm) **\$253.43**

**Pedestal Mounted Fans**

Includes an adjustable-height pedestal, column and hex key.

- G2601821 20" (3,700/2,600 cfm) **\$253.57**
- G2042101 24" (5,450/3,800 cfm) **\$271.20**
- G0318936 30" (7,250/4,650 cfm) **\$301.29**



**DAYTON Industrial Assembled Air Circulator Heads**

All circulator heads have high efficiency corrosion resistant propellers with aluminum blades. Circulator heads utilize a vertical tilt/locking adjustment for directional flow. Steel wire guards feature a gray powder-coated finish. Permanent split capacitor motors are totally enclosed air over. Single-phase units feature a 10' cord. Pull-chain switch offers easy operation for 2-speed units. Includes mounting bolts. ■ UL/CUL, OSHA STANDARDS

**Non-Oscillating Fans**

- G1854404 20" (3,055/7,700 cfm) **\$283.03**
- G1828802 24" (3,800/6,100 cfm) **\$376.20**
- G2998721 30" (8,712/9,704 cfm) **\$397.16**

**Oscillating Fans**

- G0867063 20" (3,055/7,700 cfm) **\$351.51**
- G0738726 24" (3,800/6,100 cfm) **\$416.25**
- G3057153 30" (8,712/9,704 cfm) **\$443.22**

**DAYTON Pedestal-Mounted Air Circulators**

Light commercial pedestal fans feature 3-speed selector switch operation, variable height adjustment and sturdy wheels enabling convenience, portability and maximum individual comfort. Fans are equipped with a 3-blade propeller and 9' cord. Heavy-duty steel construction with chrome-plated guards and upper column. Full 360° rotation and adjustable height pedestal enable unlimited airflow adjustments without relocating the fan. Non-oscillating.

■ UL/CUL, OSHA STANDARDS

- G2183212 16" (1,800/2,100/2,450 cfm) **\$161.23**
- G0890881 20" (2,700/3,150/3,650 cfm) **\$168.28**



**DAYTON Light Commercial Air Circulators**

Light commercial floor/wall/ceiling air circulators are used to provide a

high volume of air circulation for both spot and general cooling applications. Three-way mounting capability allows for versatile installation. Features a 3-blade propeller, chrome-coated wire guards and a circulator head that has a locking tilt adjustment. Open air-over motor has automatic reset thermal protection. 3-speed. Non-oscillating. 9' cord. Includes wall and ceiling bracket. ■ UL/CUL, OSHA STANDARDS

- G2296192 16" (2,450/1,800 cfm) **\$111.22**
- G3062787 20" (3,650/2,700 cfm) **\$126.16**



**DAYTON Industrial Mobile Air Circulators**

Direct drive circulators have a permanent split-capacitor motor with an auto-reset thermal protector and 9' cord. All units feature a 3-blade aluminum propeller and rubber wheels for easy mobility. Fan housing is constructed of heavy duty steel. Powder coated wire guards. 2-speed. Non-oscillating. ■ UL/CUL, OSHA STANDARDS

- G3279017 24" (5,800/3,600 cfm) **\$385.74**
- G1189361 30" (6,800/4,700 cfm) **\$490.12**
- G0381062 36" (12,250/8,350 cfm) **\$615.03**
- G0475824 42" (15,000/9,000 cfm) **\$774.81**



**HONEYWELL MERV 11 Pop-Up Filter**  
Filters store flat and pop into shape for installation. OEM replacement filter media is for use with Space-Gard 2200, 2120, 2250; Lennox PMAC20; General-Aire AC-1.

- 24 1/4" w x 5 7/8" d x 20 1/4" h. ■ UL STANDARDS
- G3668987 **\$25.85**

**DRI-EAZ Restoration Air Scrubber**

Removes particulates including smoke and dust and airborne viral contamination. For restoration, construction projects and healthcare facilities. Microban antimicrobial protection inhibits mold and mildew growth on the stackable rotomolded body. Up to 3 units can be daisy-chained.

MERV 16/HEPA filter with change indicator (99.97% efficient). 25' cord. 250 to 500 cfm. 63 dBA. 115V. 3A. 26 1/4" w x 18 1/4" d x 24 1/2" h.

- UL/CUL, AHAM STANDARDS
- G0557654 **\$932.95**



**DRI-EAZ**

**HEPA Carbon Filters**

15 3/4" w x 3/4" d x 15 3/4" h.

● MUST BE ORDERED IN MULTIPLES OF 4 FOR SAFE SHIPPING

- G3752944 4-pack **\$42.50EA**



**DRI-EAZ Restoration Dehumidifier**

For use in conditions of flooding and areas of excess moisture.

Stackable rotomolded exterior with electronic controls and digital hour meter. 40' drain hose and built-in duct ring for easy attachment of ducting. Units have sturdy handle and semipneumatic wheels. 25' cord. 132 pt/24 hrs @ 90% RH. 115V. 6.4A. 20" w x 19 1/2" d x 32" h.

- UL, CSA, AHAM STANDARDS
- G2350914 **\$1348.65**



**DRI-EAZ**

**Air Cleaner Filters**

13 3/4" w x 3/4" d x 13 3/4" h.

- G2554045 3-pack **\$70.00**



**FANTECH Dehumidifier**

Industrial dehumidifier is ideal for areas with extreme moisture problems. Features humidistat and overflow protection with indicator light.

Painted steel cabinet has fold-down handle and four casters. Includes 20' drain hose. 21pt bucket. 2-speed fan. 101pt/24hr @ 90% RH. 17 1/2" w x 13 1/2" d x 20 3/4" h.

- UL/CUL, CSA STANDARDS
- G1398135 **\$460.99**





**ESSICK AIR Window Evaporative Cooler**

Window evaporative cooler features rust-resistant, rugged, bolted design for long service. Unit converts from horizontal to vertical position for slider window applications. Easy to mount with no duct work, sheet metal cutting or grille assembly. Features two speeds, belt drive and front discharge. ½HP. 115 V. 5000 cfm. 1200 to 1600 sq-ft cooling capacity. ¾" water connection. 12.5 gal water capacity. 34" w x 46 7/8" d x 34 ½" h.

G2931905 **\$729.15**

**PORT-A-COOL Cyclone Portable Evaporative Coolers**

Portable evaporative cooling units are designed for compact work areas—garages, barns, patios or any small hot spot. Units feature two speeds and are ideal for cooling one person. One-piece, rotomolded polyethylene housings will not crack, rust or leak. Direct drive. ½HP. 115 V.

**Cyclone 2000**

10" propeller. 500 sq-ft cooling capacity. 2.5 A. ¾" water connection. 10 gal water capacity. 24" w x 25" d x 31" h. 4' cord.

G3543005 **\$539.00**

**Cyclone 3000**

12" propeller. 700 sq-ft cooling capacity. 5.6 A. ½" water connection. 18 gal water capacity. 29" w x 30" d x 38" h. 10' cord.

G0977435 **\$739.00**



**RE-VERBER-RAY**

**Portable Tank-Top Heater**

Heater mounts on a standard LP cylinder to provide temporary heat. Unit features a large ceramic burner assembly with highly polished aluminum reflector and stainless steel emitter rods for enhancing radiant output and heater efficiency. Includes a heavy-gauge cylinder bracket, safety shutoff valve, tip-over safety device, excess flow fitting and 2' connecting hose with regulator. Use in upright (vertical) position only. 32,000 BtuH. 50 to 500 sq-ft heating area. 1.3 lb/hr. 10 ¼" w x 4 ½" d x 18 ¾" h.

G2892391 **\$157.49**



**DAYTON Radiant Portable Gas Heater**

Construction heater uses natural gas for combustion and requires no electricity for operation. Heater should be used outdoors or indoors only in well ventilated, non-residential areas. Wraparound screen offers added safety. Low-pressure burner system includes regulator. Piezo ignition. 50/70/100,000 BtuH. 2,900 sq-ft heating area. 104 cu-ft/hr fuel rate. 16 5/16" w x 16 5/16" d x 29 1/16" h.

■ CSA STANDARDS

G0811702 **\$300.25**



**DIMPLEX Electric Utility Heaters**

Compact, high-performance units are suitable for basement, enclosed porch, garage and workshop areas. Features automatic thermal protection, built-in thermostat and fan delay. Steel housing with powder-coated epoxy finish. Includes ceiling/wall mounting bracket. Single phase. 240 V.

■ UL/CUL STANDARDS

**4 kW Heater**

Includes cord set. 13,652 BtuH. 16.7 AAC. 160 cfm. 9" w x 7 ¼" d x 11" h.

G4677687 **\$193.88**

**5 kW Heater**

Hardwired. 17,065 BtuH. 20.8 AAC. 220 cfm. 9" w x 9" d x 11" h.

G4703072 **\$274.99**



**DAYTON**

**Freeze Protection Heater**

Electric utility fan-forced heater features automatic thermal protection and thermostat with a 40° to 90° range. Steel housing with polyester powder-coated finish offers corrosion resistance. Heating elements feature aluminized paint finish for corrosion resistance. Rated for zero-clearance in concealed space or plenum applications. NEMA 12K control box is gasketed to keep out moisture and dust. Includes mounting bracket. 240/208 V. 10.7/9.42 AAC. 2.5/1.95 kW. 8,530/6,650 BtuH. 150/130 cfm. 14" w x 14" d x 12 ½" h.

■ ETL STANDARDS

G1181932 **\$461.48**



**INDUSTRIAL BLOWERS AND FANS**

Industrial jobsite blowers and fans are rugged and reliable. They provide ventilation and are used to dry floors, walls and structures. Space-saving designs are stackable.




**DRI-EAZ Sahara Pro X3 TurboDryer**

Blower is used to dry carpets, to accelerate structural drying or for ventilation. Up to three units can be daisy-chained.

Unit features built-in underside drying vent, GFCI protected outlet, easy-grip handle and MicroBan antimicrobial product protection. 3-speed. 10" blower wheel. ½HP. 115 V. 4 A. 1,900/2,400/2,700 cfm. 17" w x 18 ½" d x 18 ¾" h. 25' cord.

■ UL/CUL STANDARDS

G0763734 **\$365.00**



**DRI-EAZ Ace TurboDryer**

Fan is used to ventilate, create negative air pressure and dry walls, floors and other

structures. Provides high airflow at low amperage. Built-in MicroBan antimicrobial product protection inhibits growth of odor- and stain-causing bacteria, mold and mildew. Six operating positions. Stackable for operation and storage. Nonskid rubber feet. 2-speed. 16" propeller. ¼HP. 115 V. 1.5 A. 2,139/2,250 cfm. 20 ¼" w x 19" d x 24" h. 25' cord.

■ UL/CUL STANDARDS

G1426835 **\$445.00**



**DRI-EAZ Studebaker AirPath**

Down-draft fan dries carpets and hard floors in minutes by directing air uniformly 12 feet in all directions. 360° airflow at 40 mph velocity. Locking casters. 20" propeller. 1HP. 115 V. 7.5 A. 4,750/5,500 cfm. 25 ½" w x 26" d x 14 ¾" h. 25' cord.

■ UL/CUL STANDARDS

G0757154 **\$595.00**

**DRI-EAZ Vortex Axial Fan**

Single-speed fan is designed to ventilate confined spaces, create negative air pressure, remove odors or dust and facilitate drying. High static pressure. Duct up to 125'. 12" propeller. 1HP. 115 V. 7.4 A. 2,041 cfm. 18 ¾" w x 15 ¾" d x 19 ¼" h. 20' cord.

■ UL/CUL STANDARDS

G1495243 blower **\$615.00**

G1795726 300" extension duct **\$289.00**







**DAYTON AC Axial Fans**  
Single-speed fans are not speed controllable. Axial fans are rated at 60/50Hz. Operating at 50Hz will decrease CFM by approximately 20%. Zero-friction fans eliminate friction between shaft and bearing for rotational stability. Impedance-protected shaded pole motor with terminal connection. 4 1/16" w x 1 1/2" d x 4 1/16" h. ■ UL/CUL STANDARDS

**Vertical Mount**  
Sleeve bearings.

Z#	VAC watts	fan rpm	@ 0" SP	price
G3318971	115 18	2,900	105 cfm	<b>\$24.67</b>
G0248771	115 20	3,100	115 cfm	<b>\$32.16</b>
G0935821	230 19	2,900	105 cfm	<b>\$29.67</b>

**Horizontal or Vertical Mount**  
Ball bearings.

Z#	VAC watts	fan rpm	@ 0" SP	price
G3426936	115 18	3,050	107 cfm	<b>\$39.43</b>
G1013984	115 21	2,750	124 cfm	<b>\$35.94</b>

**DAYTON Filter Guard Assembly**

Plastic assembly includes fan guard, foam filter media and retainer. Fits 4 1/16" fan. 4 1/8" mounting eye OC (4).



G0344084 **\$4.28**

**DAYTON Cord Set**

Features a SPT-1, 18/2 AWG cord that plugs into terminals of all standard 115 or 230V axial fans. 24" cord.



G0408712 90° head **\$1.73**  
G1301176 45° head **\$2.27**



**DAYTON Single-Speed Residential Split-Phase Belt-Drive Motors**

Split-phase open dripproof motors are for use in fans, blowers, whole-house fans, air circulators and air coolers where a quiet running motor is required. 48Y frame. 1-phase. Continuous duty. CW/CCW rotation. Auto thermal protection. Cradle mount. 115V. 1,725 rpm. 1/2" x 1 1/2" shaft with 5/8" diameter shaft bushing. ■ UL, CSA STANDARDS

Z#	HP	full load	bearings	price
G1715935	3/4	4.8A	sleeve	<b>\$76.90</b>
G3354863	3/4	6.6A	ball	<b>\$83.58</b>
G1464915	1/2	8.3A	sleeve	<b>\$114.87</b>



**CENTURY Single-Speed Commercial Split-Phase Belt-Drive Motors**

Split-phase motors are for use in exhaust fans, air circulators and other air-over fan applications. Open motors are for use in clean, dry, nonhazardous locations. 48 frame. 1-phase. Continuous duty. CW/CCW rotation. Auto thermal protection. Cradle mount. 1,725 rpm. 1/2" x 1 1/2" shaft with 5/8" diameter shaft bushing. ■ CSA STANDARDS

Z#	HP	full load	bearings	price
G1049027	3/4	5.4A	sleeve	<b>\$72.69</b>
G0702274	1/2	8.0A	sleeve	<b>\$95.99</b>

**DART CONTROLS Adjustable-Speed AC Motor Control**

Controls most single-phase AC motors and resistive loads—not for use with capacitor start motors. For use with universal, shaded pole and PSC motors on fans, blowers, pumps, vibratory feeders, heating and lighting. Includes knob, dial plate, speed pot with "on/off" switch and leads with bare ends (2). 1/4 HP. 120V. 2.5A (max). 1 1/2" w x 1 1/2" d x 2" h. G2345226 **\$39.99**



**DAYTON Direct-Drive Blower Motors**

Direct-drive ventilator motor is designed specifically as a replacement motor for Dayton ventilators. Continuous duty. Auto thermal protection. Stud mount. 1-phase. 115V.

**Shaded-Pole Motor**

Open enclosure. Capacitor NOT required. CCW rotation. 3-speed. 3.3 frame. 3" shaft. Sleeve bearings. 1/2 HP. 1.3/0.92/0.68 A full load. 1,550/1,300/1,050 rpm.

G1405241 **\$66.94**



**PSC Motors**

Open air-over enclosure. Includes capacitor. CCW rotation. 1-speed. 48Y frame. 3" shaft. Ball bearings. 1/2 HP. 1.9A full load. 1,650 rpm.

G3346445 **\$164.34**



**DAYTON PSC and Shaded Pole Blowers**

Dynamically balanced blowers provide smooth and quiet operation. Noise and vibration are held to a minimum to maintain CFM at higher static pressures. Motors have cast-aluminum end shields for greater heat dissipation and protection, resulting in less downtime and longer service life. Single-phase. Direct drive. Open motor enclosure. Forward curve wheel. Rolled steel housing. Includes discharge mounting flange for all-position mounting.

**PSC Blower**  
Round outlet. Auto thermal protection. Conduit box. 13" lead length. 3" wheel diameter. Includes inlet cover. 115V. 0.23 A. 50 cfm @ 0" SP. 3,036 rpm. ■ UL, CE STANDARDS

G0861226 **\$63.45**

**PSC Blower**  
Rectangular outlet. Auto thermal protection. 13" lead length. 5 1/4" wheel diameter. 115V. 0.77 A. 273 cfm @ 0" SP. 1,640 rpm. ■ UL/CUL, CE STANDARDS

G2768193 **\$89.56**

**AC Shaded Pole Blower**  
Rectangular outlet. Auto thermal protection. 21" lead length. 5 1/4" wheel diameter. 115V. 0.74 A. 134 cfm @ 0" SP. 1,500 rpm. ■ UL, CSA STANDARDS

G0995732 **\$66.32**

**DC Shaded Pole Blower**  
Rectangular outlet. 37" lead length. 5 1/4" wheel diameter. 12 VDC. 5.1A. 176 cfm @ 0" SP. 1,875 rpm.

G3229712 **\$64.41**

**DAYTON High-Pressure Blowers**

Powerful blowers supply high-pressure air for efficient cooling and conveying. Paddle-type, self-cleaning, die-cast wheels rotate clockwise and are precision balanced for top performance. Bottom horizontal discharge. Housing can be rotated to eight discharge positions in each rotation. Welded 16-gauge steel housing with gray baked-on epoxy finish. ■ AMCA AIR STANDARDS

**Blower with Motor**  
Includes 1HP motor with open dripproof motor enclosure. Single-phase. 115/230V. 10 3/16" wheel diameter. 6" inlet diameter. 3 1/2" x 4" discharge. 15 1/8" w x 14" d x 20 1/2" h.

G3258893 **\$459.41**

**Blower without Motor**  
13 1/2" wheel diameter. 8" inlet diameter. 5 3/4" x 7 1/4" discharge. 22 3/8" w x 18 7/8" d x 23 1/8" h.

G2907177 blower **\$449.86**  
G2690256 inlet guard **\$74.70**  
G0685763 replacement blower wheel **\$250.25**



**POWER CAT Super Cat Heavy-Duty Portable Blower**

Blower is ideal for ventilating, cooling, fume exhausting and drying. Airstreams can be directed from vertical

through 110° arc. Unit features 2-speed blower, wooden grip and duplex 15A weather-resistant grounded outlets. 1/2 HP motor. 120V. 4.5A. 877/1120 cfm. 10 1/2" x 7 1/2" outlet. 11 1/8" w x 17 1/2" d x 20 1/2" h.

■ UL STANDARDS

G1099357 **\$299.99**

**POWER CAT Duct Extension**

Flexible reinforced PVC duct extends intake or exhaust assemblies in 10' increments. Includes quick-connect clamps. 8" diameter. 10' length.

G0765222 **\$79.99**



**POWER CAT Exhaust Duct Assembly**

Flexible reinforced PVC duct attaches to blower outlet to direct air away from blower. Includes steel adapter. 8" diameter. 10' length.

G2610474 **\$149.99**





**DAYTON Direct-Drive Shutter-Mounted Exhaust Fans**

Utility exhaust fans are designed for general purpose exhaust applications. Efficient, easy-to-install exhaust fans feature automatic shutters. Fans come fully assembled with shutters and prepunched mounting holes. Totally enclosed motor is thermally protected. Speed controllable. Vertical mount. 115 V. ■UL/CUL STANDARDS



#	propeller	cfm @ 0" SP	motor RPM	motor	bearings	sones	width	height	max depth	required opening	price
G1750481	7"	140	1550	1/25 HP	sleeve	4.8	11 1/2"	11 1/2"	10 3/16"	8 1/2" x 8 1/2"	<b>\$132.18</b>
G2102204	12"	800	1550	1/25 HP	sleeve	7.6	15 1/2"	15 1/2"	12 3/8"	13" x 13"	<b>\$168.49</b>
G3333881	16"	1095	1550	1/20 HP	sleeve	8	19 1/2"	19 1/2"	14 1/2"	17" x 17"	<b>\$258.34</b>
G1435296	18"	1860	1075	1/25 HP	sleeve	8.4	21 1/2"	21 1/2"	14 1/2"	19" x 19"	<b>\$284.48</b>
G0731744	20"	2830	1100	1/4 HP	sleeve	11.3	23 1/2"	23 1/2"	17 1/2"	21" x 21"	<b>\$432.43</b>
G0349535	24"	3240	1075	1/4 HP	ball	11.7	27 1/2"	27 1/2"	19 1/2"	25" x 25"	<b>\$514.60</b>

**FANTECH Inline Centrifugal Duct Fans**

Thermoplastic fans feature an external wiring box with waterproof gasket suitable for radon gas mitigation. Prewired fans have lower sound levels than comparable surface-mounted fans. Mount horizontally or vertically—includes mounting bracket. 9 5/8" length. 7/8" flange width. ■HVI, UL/CUL, CSA STANDARDS ENERGY STAR RATED



#	fits	HP	voltage	air flow @ 0" SP	price
G0874937	4" duct	1/20	115	122 cfm	<b>\$103.99</b>
G2701973	6" duct	1/20	120	263 cfm	<b>\$127.80</b>

**DAYTON Motorized Dampers**

Single-panel motorized dampers are for use in intake or exhaust applications. Heavy-duty dampers are constructed of G90 galvanized steel. The 1 1/2" flanged frame has welded corners for added strength. Dampers can be mounted horizontally or vertically. Includes an internally mounted factory installed power-open/spring-close motor with end switch. 100-240 V. ■UL/CUL STANDARDS



#	for fan	required opening	motor bracket extension	price
G3310492	12"	13" x 13"	6 1/2"	<b>\$182.19</b>
G1675904	16"	17" x 17"	6 1/2"	<b>\$197.96</b>
G1779644	24"	25" x 25"	6 1/2"	<b>\$234.89</b>
G1379691	30"	31" x 31"	10 1/4"	<b>\$347.36</b>
G0847804	36"	37" x 37"	10 1/4"	<b>\$397.78</b>

**DAYTON Wall Collar**

Wall collars provide an easy way to install propeller fans in the wall opening. Internal flange for mounting shutters. External flange provides flashing for the wall opening. For use with Dayton 20" exhaust and supply propeller fans. Ships unassembled—assembly hardware included. 18-gauge galvanized steel construction. 24 1/2" w x 17 1/2" d x 24 1/2" h. ► MORE SIZES ONLINE



G1732455 **\$167.25**

**TJERNLUND Axial Duct Booster**


In-line axial fan duct boosters are designed for powered air intake and exhaust systems to boost air flow in hard-to-heat or -cool areas. Galvanized steel housing with built-in duct stop on the inlet and crimped edge on the outlet. Open air-over motor enclosure. Sleeve bearings. Includes external junction box for easy wiring. 120 V.



#	fits	length	air flow @ 0" SP	max amps	price
G1296495	6" duct	9"	180 cfm	0.4	<b>\$49.46</b>
G2730926	8" duct	9"	325 cfm	1.1	<b>\$66.44</b>
G1892414	12" duct	15 1/2"	875 cfm	1.25	<b>\$144.84</b>

**DAYTON Volume Control Damper**


For use in low-to-medium pressure and velocity systems, damper is designed to regulate the volume of air moving through the duct system. Can be used as a positive shutoff or for automatic control. Install with blades in horizontal position. 20-gauge galvanized steel frame is 8 1/4" deep. 14-gauge galvanized steel round blade. Plated steel axle measures 1/2" in diameter. Stainless steel bearings. EPDM blade seals. Actuators sold separately. 3,000 fpm (max). 180°F (max). 4" wg pressure differential (max). 5 7/8" damper diameter. 6" duct diameter.




► MORE SIZES ONLINE  
G3398211 **\$283.86**

**DAYTON Weather Hoods**

Hoods provide wall-opening protection for Dayton propeller fans from rain and snow. 18-gauge galvanized steel construction. Ships unassembled—assembly hardware and birdscreen.



#	for fan	width	depth	height	price
G2684911	20"	24 1/2"	18 1/2"	24 1/2"	<b>\$209.58</b>
G1844622	24"	28 1/2"	21"	28 1/2"	<b>\$201.90</b>
G1885021	30"	34 1/2"	25"	34 1/2"	<b>\$326.19</b>
G1409371	36"	40 1/2"	29"	40 1/2"	<b>\$360.01</b>
G0877633	48"	54 1/2"	38"	54 1/2"	<b>\$520.41</b>

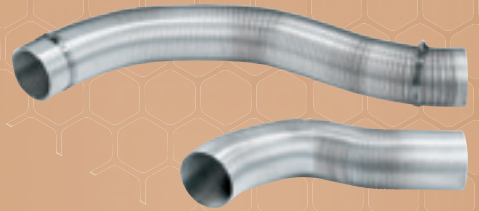

**WESTAFLEX Noninsulated Flexible Ducts**

Expandable/flexible duct is made of strong, lightweight 0.005" aluminum alloy. It can be installed within walls, wall chases or ceilings where inaccessibility requires a durable duct. For use in ventilation equipment for air and gas that is free of corrosive fumes or particles. G0748483, G2978403 and G1145602 attach to discharge ducts with included stainless steel screw clamps (2). 1/8" wall thickness. 5000 fpm airflow (max). ■NFPA UL STANDARDS

15' Length	price
G0748483 3" inner diameter	<b>\$17.85</b>
G2978403 4" inner diameter	<b>\$20.41</b>
G1145602 6" inner diameter	<b>\$30.45</b>
G3451847 8" inner diameter	<b>\$37.99</b>

30' Length	price
G1284297 3" inner diameter	<b>\$38.99</b>
G3508531 4" inner diameter	<b>\$42.59</b>
G1301386 6" inner diameter	<b>\$64.01</b>
G3085031 8" inner diameter	<b>\$95.99</b>
G3124091 10" inner diameter	<b>\$103.99</b>
G2984633 12" inner diameter	<b>\$106.76</b>

**DUCTMATE Duct Fittings**

Fittings are for use with GreenSeam duct system. 26-gauge galvanized steel construction. 3" WG pressure rating. ■SMACNA, ASTM STANDARDS

**90° Elbow**  
Adjustable elbow is for use with 6" duct.

G0571575 **\$4.65**

**Press-On Collar w/Damper**  
Features pre-sealed, low-leakage hardward. For use with 6" duct.

G1193604 **\$15.02**



**BROAN Transition Ducts**

For connecting round ducts to rectangular ducts. 30-gauge galvanized steel construction.

G0959174 3 3/4" x 10" to 6" round	<b>\$13.12</b>
G1341103 3 3/4" x 10" to 7" round	<b>\$16.77</b>
G2812494 8" x 12" to 12" round	<b>\$46.08</b>



**JOHNS MANVILLE Microlite XG**

**Duct Insulation Wraps**  
Duct insulation wrap is ideal for HVAC systems that operate below ambient temperatures.

Insulation comes with a vapor barrier and a 2" stapling kraft jacket. 1 1/2" thickness. 48" x 25' roll. ■ASTM, NFPA, UL/CUL STANDARDS

G3618982 3/4 lb density (4.2 R-factor)	<b>\$42.32</b>
G3643062 1 lb density (6.5 R-factor)	<b>\$67.38</b>





**MARATHON MOTORS Carbonator Pump Motors**

Carbonator pump motors are used for liquid transfer pumps, vending machine pumps and other hub-mounted pump applications. Motors have a threaded conduit hole. Short, slotted shaft is for close-coupling the carbonator pump to the motor and extended hub is for direct-mounting pump to motor. Split-phase motor with open dripproof enclosure. Auto thermal protection. CW/CCW rotation. 48Y frame. Cradle mount. 1,725rpm.

■ UL, CSA STANDARDS

#	HP	voltage	Hz	shaft	price
G3030894	½	115	60	½" x ½"	<b>\$99.99</b>
G0457125	½	100-120/200-240	60/50	¾" x 1½"	<b>\$116.41</b>

**CENTURY Replacement Motor**

This motor is a replacement for OEM motors used in triangle belt-drive exhaust fans. Open motors are for use in clean, dry, nonhazardous locations. Split-phase motor with open dripproof enclosure. Auto thermal protection. CWLE rotation. 56Z frame. Ball bearings. ½HP. 115 V. 7.5 A. 1,725rpm. ½" x 1½" shaft. ■ UL, CSA STANDARDS

G3067005 **\$144.99**



**CENTURY PSC Condenser Fan Motor**

Commercial-duty motor features higher starting torque, cooler running temperature and reversing plug. Suitable for outdoor air conditioner condensers and refrigeration condensers. Shaft up/down motors have both endshields totally enclosed with removable drain plugs. Can be mounted vertically or horizontally. Shafts are double flat—90° apart. Requires capacitor. Totally enclosed air-over enclosure. 1-speed. Auto thermal protection. CW/CCW rotation. 48Y frame. Stud mount. Sleeve bearings. ¼HP. 208-230 V. 1.2-1.3A. 1,075rpm. ½" x 5⅝" shaft. ■ UL, CSA STANDARDS

G2473685 **\$39.99**



**CENTURY PSC High-Ambient Condenser Fan Motor**

PSC motors are for use with outdoor air conditioning and refrigeration condensing units and heat pumps. Rotor cores have corrosion-resistant coating to ensure long motor life. Requires capacitor. Totally enclosed air-over enclosure. 1-speed. Auto thermal protection. CW/CCW rotation. 48Y frame. Stud/band/hole mount. Ball bearings. ¼HP. 460 V. 1A. 1,075rpm. ½" x 6" shaft. ■ UL, CSA STANDARDS

G3404807 **\$149.99**

**DAYTON Oval Run Capacitors**

Aluminum, hermetically sealed capacitors improve the electrical performance of motors, air conditioners and refrigeration equipment. PCB-free, the capacitors feature an aluminum case with steel cover and ¼" male quick-connect terminals with plastic insulators. Protected to 10,000 AFC. 370 V. -40° to 70°C (-40° to 158°F).

■ ROHS, UL/CUL STANDARDS



#	MFD rating	width	depth	height	case height	price
G1319753	4	2"	1¾"	2¾"	2⅜"	<b>\$5.74</b>
G3303352	5	2"	1¾"	2¾"	2⅜"	<b>\$5.96</b>
G3132534	7.5	2"	1¾"	3¾"	2⅜"	<b>\$6.43</b>
G2351474	10	2"	1¾"	3¾"	3⅜"	<b>\$7.65</b>
G1021693	15	2"	1¾"	3¾"	2⅜"	<b>\$10.91</b>

**ICM Time Delay Relays**

Time delays feature a control knob for adjustable time ranges, ¼" quick-connect terminals and single-hole mounting.

**Delay on Make**

Two-wire hook-up for compressor staging and protection. Adjustable 1.8 to 600sec time delay. 18 to 240 V. 1.5A contact rating.

G2825864 **\$5.80**



**Delay on Break**

Two-wire hook-up for compressor staging and protection. Adjustable 1.8 to 600sec time delay. 18 to 240 V. 1.5A contact rating.

G1959745 **\$5.60**



**Delay on Break/Lockout**

Provides lock-out protection and brownout protection by preventing compressor startup due to low line voltage/power failure. Adjustable 180 to 600sec time delay. 18 to 30 V. 1.5A contact rating.

G2439412 **\$6.93**



**Post-Purge**

Provides an "off" delay to allow the circulating fan to continue running in heat pump, air conditioning and forced air systems. Adjustable 12 to 390sec time delay. 18 to 30 V. 1A contact rating.

G2754753 **\$12.73**



**BROAN Replacement Motors**

Replacement motors are for use with Broan exhaust fans. » CHECK ONLINE FOR THE RIGHT ONE FOR YOU



**MFR# 99080176**  
For use with Broan #507MG (G3347373) and #505 (G1714255). 120 V. 60Hz. G3209805 **\$26.92**

**MFR# 99080180**

For use with Broan #509MG (G2343704). 120 V. 60Hz.

G0762641 **\$27.99**



**DAYTON Ventilation Control**

Line voltage thermostat is commonly used as a ventilation control in agricultural, commercial and industrial applications. Contacts close on temperature rise for cooling applications. Mounts to standard 2" x 4" vertical box. SPST switch. Bimetal sensor. Analog display. -10° to 100°F control (6°F differential). 120 to 240 VAC. 2" w x 2" d x 5½" h. ■ UL STANDARDS

G0396532 **\$45.28**



**DAYTON Cooling Line Voltage Thermostat**

Line voltage thermostat is for use in cooling applications. Mounts to standard 2" x 4" vertical box. SPST switch closes on rise. Bimetal sensor. 50° to 90°F control (4°F differential). 120 to 227 VAC. 2¾" w x 1½" d x 4¾" h.

■ UL STANDARDS

G1112973 **\$28.47**



**PECO Heating/Cooling Line Voltage Thermostat**

Line voltage thermostat is for heating and cooling in agricultural, commercial and industrial applications. NEMA 4X enclosure is suitable for locations that are wet or mildly corrosive, with high humidity or airborne contaminants.

Mounts to standard 2" x 4" vertical box. SPDT switch opens/closes on rise. Stainless steel, hydraulic cap sensor. Analog display. 40° to 110°F control (±3°F differential). 120 to 277 VAC. 3" w x 2¾" d x 7" h.

■ UL, CSA, NEC STANDARDS

G3075134 **\$34.73**



**NU-CALGON Ice Machine Cleaner**  
Nickel-safe, food-grade formula is ideal for descaling ice machines with nickel-plated evaporators. Acidic. 16 oz bottle.  
G2902356 **\$7.57**

**NU-CALGON Evap Pow'r-C Evaporator Cleaner**

Alkaline, no-rinse formula is for use on evaporator coils. Improves heat transfer, increases system capacity and reduces head pressure.

■ OSHA STANDARDS

G1780082 1 gal **\$16.88**  
G1235333 2½ gal **\$55.57**



**NU-CALGON Evap Foam Evaporator Cleaner**

No-rinse foaming aerosol is for use on evaporator coils. Improves heat transfer, increases system capacity and reduces head pressure. 18 oz can.

■ NSF, OSHA STANDARDS

G0530914 **\$9.83**

**NU-CALGON Special HD CalClean Coil Cleaner**

Alkaline detergent is for use on air-cooled condensers, evaporators, electronic filters and fan blades. Specifically designed for cleaning electronic air filters. Liquid detergent contains surface-active agents, grease solvents, alkaline cleaners, corrosion inhibitors and water conditioners. 1gal bottle.

■ USDA STANDARDS

G2875957 **\$23.75**



**SPECTROLINE Refrigerant Leak Detection Kit**

Refrigerant leak detection kit is for use in small and medium commercial air conditioning refrigeration systems. Fluorescent leak detection kits use OEM-approved universal/POE (polyolester) solvent-free dyes that reveal leaks as small as ¼ ounce/year or less. Compatible with CFCs, HCFCs, HFCs and ammonia. Very high intensity blue LED. Powered by rechargeable NiMH battery pack.

G1012024 kit **\$279.99**

kit includes: OPTIMAX rechargeable inspection LED flashlight, EZ-Ject dye injector, EZ-Ject cartridges (2), fluorescence-enhancing glasses, GLO-AWAY cleaner, perge fitting, AC and 12 VDC charger, plastic carrying case, instructions



**DIVERSITECH Fin Comb Kits**

Kits contain color-coded heads for multiple fin sizes. 1" insertion depth. 1¾" wide tip. 4¼" overall length.



**T-100 Kit**

G2260343 kit **\$7.78**  
kit includes: black handle, heads (8, 9, 10, 11, 12, 14)

**T-101 Kit**

G2947761 kit **\$6.29**  
kit includes: black handle, heads (13, 15, 16, 17, 18, 20)

**DIVERSITECH Metal Fin Comb**

Fin comb features a heavy-duty bicycle-grip handle with spring wire bristles that adjust to all fin spacing. 1¾" insertion depth. 1¼" wide tip. 8¼" overall length.  
G1258092 **\$8.79**



**PARKER VIRGINIA Thermal Mastic**

Thermal mastic compound is ideal for wherever rapid heat transmission is desired. It increases heat transfer at 4X the rate obtained with mechanical mounting only. Stable at all working temperatures. Does not harden or loosen. -50° to 220°F. 7.5 oz tube  
G2052924 **\$8.99**



**SPECTROLINE EZ-Ject Dye Cartridge**

Dye capsule leak detector cartridge is for use in small and medium size air conditioning and refrigeration systems. For use with POE, Alkylbenzene or mineral compressor oil. Up to 2 gallons of oil in system. Up to 25 pounds of refrigerant in system. 0.5 oz capsule.  
G0879234 6-pack **\$95.19**



**IMPERIAL Charging Hose Sets**

Kevlar-lined PolarShield hoses can be used with all blends of refrigerants. Adjustable brass core depressor to match valve core. ¼" female connection. 800 psi working pressure. 4000 psi burst pressure. ■ UL, EPA STANDARDS

**60" Hose Set**

Replacement hoses for any manifold gauge set. For use with HCFC and HFC refrigerants.


G1899387 3-piece set **\$42.09**  
set includes: red, yellow, blue



**72" Hose Set**

Hoses feature permanently attached straight Kwik-Coupler shut-off connector at one end of each hose. For use with R-410A. Hoses include system adapters (2) and female coupler (1).

G0604396 3-piece set **\$74.41**  
set includes: red, yellow, blue



**PANASONIC A/C Compressors**

Compressors are for use with window A/C and PT A/C units. Includes motor protector and mounting parts. R-22 refrigerant.

②#	nominal HP	voltage	BtuH	base mounting (center) triangle	line connect discharge ID / suction ID	width	depth	height	price
G4213483	¾	208/230	6625	5¾"	¾" / ¾"	4¾"	6¾"	10¾"	<b>\$254.78</b>
G3913323	¾	208/230	8550	5¾"	¾" / ¾"	4¾"	6¾"	10¾"	<b>\$274.82</b>
G4196333	1	115	11350	6"	¾" / ½"	4¾"	8"	12½"	<b>\$269.35</b>
G4040617	1	208/230	11350	6"	¾" / ½"	4¾"	8"	12½"	<b>\$269.35</b>
G4205415	1¾	208/230	12660	6"	¾" / ½"	4¾"	8"	12¾"	<b>\$285.74</b>
G4194766	1¾	115	12700	6"	¾" / ½"	4¾"	8"	12¾"	<b>\$285.74</b>
G4116743	1¾	208/230	18055	6"	¾" / ¾"	5¾"	8¾"	12¾"	<b>\$358.59</b>

**SERVICE MANIFOLDS & GAUGES ON PAGE 59**

G2128472 400 Series  
G2076855 600 Series  
G1863784 600 Series







# JANITORIAL & GROUNDS MAINTENANCE




PAINTS & PRIMERS  
// page 78



TOILET PAPER & DISPENSERS  
// page 72

## POPULAR BRANDS

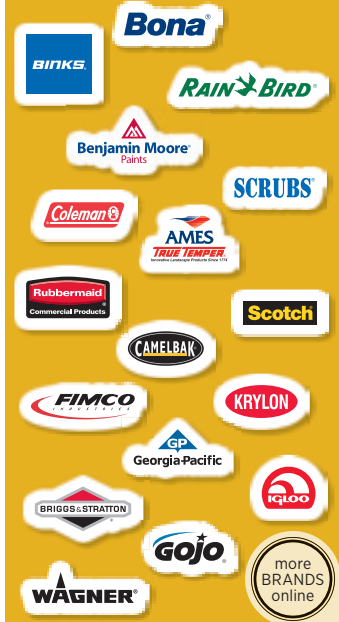

PRESSURE WASHERS  
// page 77



HAND WIPES  
// page 73



VACUUMS  
// page 77



COOLERS  
// page 80



DISINFECTANTS  
// page 73, 75

NEED DISINFECTANTS, TOWELS, SHOVELS OR BROOMS? ZORO HAS EVERYTHING YOU NEED **AND** MORE!

Can you dig it? Our janitorial & grounds maintenance section has over **20,000** products available. If you need to clean, disinfect or polish a home or an entire building, you'll find the products and tools to obtain professional results. If your property needs a fresh coat of paint, do it with the right products and equipment to make painting, coating and clean up fast and efficient. Have expansive grounds to maintain? No problem! We have thousands of items to get the job done right!



SPRAY GUNS  
// page 79



JANITOR CARTS  
// page 74

**VALUE BRAND Linear Low-Density Polyethylene Liners**

These liners are carefully constructed with top quality LLDPE resins to add increased film strength and for superior puncture and tear resistance—ideal for trash containing sharp objects. Star seal bottoms are virtually leakproof. Flat pack. Clear. [▶ MORE ONLINE](#)

#	capacity	size	thickness	load	count	price
G0711584	40 to 45 gal	40" x 46"	1.1 mil	70 lb	100	<b>\$24.54</b>
G1506285	56 gal	42½" x 48"	1.1 mil	70 lb	100	<b>\$27.21</b>
G1616815	60 gal	38" x 58"	1.7 mil	90 lb	100	<b>\$45.43</b>



**VALUE BRAND High-Density Polyethylene Liners**

Coreless rolls allow efficient dispensing and inventory control. For soft refuse—3-times stronger and more durable than ordinary polyethylene liners of the same thickness. Reduced tendency for tears or punctures to "zipper". Puncture resistant star seal bottoms—no side seams to tear. Clear. [▶ MORE ONLINE](#)

#	capacity	size	thickness	load	count	price
G1259352	7 to 10 gal	24" x 24"	8 micron	20 lb	1,000	<b>\$18.09</b>
G1335162	33 gal	33" x 40"	12 micron	45 lb	250	<b>\$13.99</b>
G1908286	40 to 45 gal	40" x 48"	12 micron	45 lb	250	<b>\$19.49</b>
G2108662	40 to 45 gal	40" x 48"	16 micron	75 lb	250	<b>\$27.99</b>
G1302375	60 gal	36" x 60"	12 micron	45 lb	200	<b>\$18.39</b>



**DOGIPOT Pet Waste Bags**

Eliminate dog pollution in all dog-friendly areas—the perfect balance of dependability and biodegradability. Polyethylene construction. 0.7 mil thickness. 8" x 13". Brown. 200 bags/pack. G3902841 10-pack **\$69.85**

**UNGER NiftyNabber Pro**

All-purpose grabber is ideal for picking up trash (bottles, cans, paper, etc.), as well as retrieving out-of-reach items. Durable steel construction with powerful claws grip small and oddly shaped objects. Squeeze grip.

G2441792	18" length	<b>\$19.89</b>
G2816694	36" length	<b>\$19.95</b>
G3366842	51" length	<b>\$21.64</b>
G3432064	96" length	<b>\$51.92</b>



**VALUE BRAND Contractor Clean-Up Bags**

Highly puncture- and tear-resistant bags in coreless rolls are made from linear low-density polyethylene (LLDPE). Star seal bottom with no side seams helps prevent leakage. Ideal for contractor, construction and commercial applications. 42 gal. 120 lb load. 3 mil thickness. 33" x 48". Black. 20 liners/roll. G3399015 **\$10.99**



**BERRY PLASTICS Big City Trash Can Liners**

Linear low-density polyethylene provides exceptional strength with good puncture and tear resistance. Star seal bottom. Coreless roll. 96 gal. 2 mil thickness. 52" x 75". Black. 10 liners/roll. G4183356 5-pack **\$64.99**



**VALUE BRAND Deskside Recycling Receptacles**

Square recycling cans feature "we recycle" symbol. Linear low-density polyethylene with rolled rim provides added strength and a convenient area to lift or pull. [▶ MINIMUM 30% POST-CONSUMER RECYCLED CONTENT](#)

G1677112	3½ gal	<b>\$2.99</b>
G1501482	7 gal	<b>\$3.59</b>
G0504043	10½ gal	<b>\$5.49</b>



**VALUE BRAND Outdoor Utility Containers**

Durable galvanized sheet steel containers are rust-resistant and won't freeze or crack. Utility cans feature corrugated sides and wire-reinforced rim. Side drop handles and recessed bottom allow for easy handling. Designed for dry materials—not liquidtight.

[▶ LIDS AVAILABLE ONLINE](#)

G2881882	20 gal	<b>\$11.65</b>
G2200572	31 gal	<b>\$14.54</b>



**RUBBERMAID BRUTE Waste Container Bases**

Durable polyethylene containers with UV protectant finish are crush-resistant. Rim and base are reinforced for durability. Will not rust, chip or peel. Built-in handles allow easy, non-slip lifting and anti-jam nesting. [■ NSF STANDARDS ▶ MORE ONLINE—LIDS ALSO AVAILABLE](#)

white	gray	yellow	red	green	capacity	diameter	height	price
G0071014	G0071023	G0071032	G0071041	G0071057	10 gal	15½"	17½"	<b>\$13.02</b>
G0071136	G0071127	G0071145	G0071172	G0071154	32 gal	22"	27¼"	<b>\$25.94</b>
G0071181	G0071206	G0071197	G0071233	G0071215	44 gal	24"	31½"	<b>\$40.10</b>
G0071285	G0071242	G0071251	G0071267	G0071276	55 gal	26½"	33"	<b>\$61.50</b>

**RUBBERMAID Brute 5-Wheel Dolly**

Easy mobility and maneuverability of heavy loads. For use with 20 to 55 gal Brute round containers. Rubber and steel construction. Resists rust, chipping and denting. Heavy-duty 3" swivel casters provide mobility. 250 lb capacity. 18¼" diameter. G3165994 **\$40.66**



MORE THAN 400,000 ITEMS ONLINE



**PURELL NXT Maximum Capacity Dispenser**  
Manually dispenses soap with one-hand push operation. 2,000 mL capacity. 6 $\frac{3}{8}$ "w x 4 $\frac{3}{4}$ "d x 10 $\frac{1}{2}$ ".  
■ ADA STANDARDS  
G2811444 **\$7.50**



**PURELL TFX Touch-Free Dispenser**  
Touch-free dispenser is for use with liquid or foam. Requires batteries. 1,200 mL capacity. 6 $\frac{3}{8}$ "w x 4 $\frac{3}{4}$ "d x 11 $\frac{1}{4}$ "h.  
■ ADA STANDARDS  
G2030296 **\$29.97**

**PURELL Advanced Instant Hand Sanitizer**

This alcohol-based hand sanitizer works in as little as 15 seconds, with no water or towels needed. Kills 99.99% of most common germs that may cause illness. 2,000 mL. ■ FDA STANDARDS  
G3746364 4-pack **\$63.44**



**PURELL Advanced Instant Hand Sanitizer Foam**

Advanced non-aerosol foaming formula. Thick, rich foam formula stays on your hand. Kills 99.99% of most common germs that may cause illness. 1,200 mL.  
■ FDA STANDARDS  
G3646273 2-pack **\$52.28**



**GOJO TFX Touch-Free Dispensing Systems**

Touch-free design is hygienic and provides trouble-free performance. Plastic construction. Wall mount. Requires batteries. Refills snap in. 1200 mL capacity. 6 $\frac{3}{8}$ "w x 4 $\frac{3}{4}$ "d x 11 $\frac{1}{4}$ "h.  
■ ADA STANDARDS  
G2517006 dove gray  
G3120704 black  
each **\$29.97**



**GOJO Premium Foam Handwash**

Rich, gentle handwash with skin conditioners. Cranberry fragrance. 1200 mL.  
■ ADA, UL, CE STANDARDS  
G3219361 2-pack **\$34.69**



**GEORGIA PACIFIC Paper Towel Dispenser**  
Economical, versatile towel dispenser holds up to 500 C-fold or 600 multifold towels to provide a cost-effective solution for washroom towel dispensing. Key-lock design protects against waste and pilferage. Steel construction. Wall mount. 11 $\frac{1}{4}$ "w x 4"d x 15"h.  
G0674572 **\$22.99**



**GEORGIA PACIFIC Signature Paper Towels**  
Embossed 2-ply design provides softness and absorbency. ■ EPA DESIGN FOR THE ENVIRONMENT, CONTAINS POST-CONSUMER RECYCLED CONTENT

**Multifold**  
Interfolded for continuous one-at-a-time dispensing. 125 sheets/pack.  
G1048004 16-pack **\$20.41**

**C-Fold**  
Specially designed for added strength to reduce tabbing during dispensing. 120 sheets/pack.  
G3074434 12-pack **\$25.68**

**GEORGIA PACIFIC enMotion High-Capacity Roll Towel**

High-quality, high capacity roll towels are specifically designed to be used with enMotion touch-free dispensers to provide reliable towel dispensing at the wave of a hand. Soft, absorbent towels dry hands quickly. 10" x 800' roll. Brown.  
■ ECOLOGO CERTIFIED, 100% TOTAL RECYCLED CONTENT  
G2842287 6-pack **\$59.89**



**GEORGIA PACIFIC SofPull Centerpull Towel Dispensers**  
One-at-a-time hands-free operation provides sanitary, contamination-resistant dispensing. Soft, absorbent towel dries hands quickly.

**Junior Capacity**  
Perfect for any facility where saving space is critical. 6 $\frac{1}{16}$ "w x 7 $\frac{1}{2}$ "d x 10 $\frac{3}{8}$ "h.

G1669482 gray dispenser each **\$12.79**  
G2627931 blue dispenser each **\$12.79**  
G0882104 275-sheet roll 8-pack **\$42.98**

**Regular Capacity**  
Ideal for steady traffic areas with consistent use. 9 $\frac{1}{4}$ "w x 8 $\frac{3}{4}$ "d x 11 $\frac{1}{2}$ "h.

G0870116 gray dispenser each **\$15.29**  
G1333631 blue dispenser each **\$15.29**  
G1651937 320-sheet roll 6-pack **\$47.24**

**GEORGIA PACIFIC Jumbo Bathroom Tissue Dispensers**

Durable, high-impact, ABS plastic features translucent gray color which eases monitoring of paper supply. Key-lock design protects against waste as well as pilferage while making refilling rolls quick and easy. For use with 9" jumbo roll tissue. Wall mount.

**1-Roll Dispenser**  
11" w x 6" d x 11" h.  
G2348586 **\$13.99**

**2-Roll Dispenser**  
20" w x 5 $\frac{1}{2}$ " d x 11 $\frac{1}{2}$ " h  
G1165351 **\$19.99**



**GEORGIA PACIFIC Jumbo Bathroom Tissue**

Jumbo 9" rolls are 1-ply. 2,000' roll.  
G3171043 8-pack **\$30.96**







### GOJO Hand Cleaner Dispenser

Gravity fed heavy-duty hand cleaner dispenser works with smooth and pumice formulas. 4.5 lb cartridge capacity. 5½" w x 5½" d x 4½" h.

G1751154 **\$14.69**



### GOJO Pumice Hand Cleaner

Crème formula with fresh lemon fragrance and pumice scrubbers. For removing grease, tar and oil. Use with or without water. 4.5 lb cartridge.

G0362092 **\$13.99**



### RUBBERMAID SeaBreeze 9000 Aerosol Dispenser and Canisters

Odor neutralizing technology consistently meters sprays every 15 minutes. Keyless lock-on cabinet is easy to operate—no programming required. 800 cu-ft coverage.

### SeaBreeze 9000 Aerosol Dispenser

4¾" w x 3¼" d x 7½" h. Requires D batteries (2)—NOT included.

G2480064 **\$42.12**

### Variety Pack Canister Set

G3153701 set **\$71.01**  
set includes: country linen (2), citrus breeze (2), spring garden (2)



### VALUE BRAND Toilet Seat Dispenser and Covers

Biodegradable seat covers provide a hygienic barrier for sanitary protection.

### Toilet Seat Cover Dispenser

Plastic construction. Holds 500, half-fold toilet seat covers. Screw pack included. 16¼" w x 2½" d x 11½" h.

G1575987 **\$8.29**

### Toilet Seat Covers

Half fold. 14¼" x 17½". 250 covers/box.

G1108222 20-pack **\$38.99**

### GYM WIPES

#### Disinfectant Wipes and Dispenser

Nontoxic wipes clean and disinfect in 1 step—kills up to 47 known pathogens including HIV, CA-MRSA and E. coli. Convenient wall mount dispenser is ideal for high-traffic facilities where space is limited. Centerpull, hands-free design reduces usage and minimizes the risk of cross contamination.



#### Centerpull Wall Dispenser

Plastic construction. Wall mount. 700 to 800 wipe capacity. 10" w x 10" d x 12½" h.

G3012195 **\$36.99**

#### Force Wipes Refill

Phenol-, alcohol-, and bleach-free. Lemon fragrance. 6" x 8" sheet. 800 wipes/pack.

G0485371 **\$48.29**



### GYM WIPES

#### Antibacterial Gym Equipment Wipes

Perfect for controlling and eliminating organisms on high traffic surfaces. Nontoxic wipes clean and disinfect in 1 step—kills up to 47 known pathogens including HIV, CA-MRSA and E. coli. Fresh fragrance. PH-balanced, ohenol- and alcohol-free formula. 8" x 6" sheet. 700 wipes/bucket. ■ VOC COMPLIANT

✓ EPA REGISTERED  
G1120752 **\$53.04**



### LYSOL Disinfectant Spray

Professional ready-to-use spray prevents mold and mildew growth. This tuberculocidal, virucidal, fungicidal and bactericidal formula kills germs and helps prevent the spread of MRSA, HIV-1, Influenza A (H1N1) and norovirus. 19 oz aerosol can.

G2100716 original  
G1741022 fresh scent  
G3187484 country  
G2364092 crisp linen  
12-pack **\$69.69**



### GEORGIA PACIFIC Envision Facial Tissue

Economical, 2-ply facial tissue offers an affordable solution for all areas. 8" x 8¾" sheets. 100 tissues/box.

✓ ECOLOGO CERTIFIED, 100% RECYCLED CONTENT  
G2251216 30-pack **\$24.29**



### VALUE BRAND Shop Towels

All-purpose wiping cloths are made of cotton. Varied colors and sizes. 25 lb carton.

G1901295 **\$26.49**



### SCOTT Shop Towels

Super-strong towels easily absorb liquids, oils and grease—towels continue to work even when wet. Ideal for changing oil, refilling fluids, and general automotive applications. 11" x 10¾" sheets. 55 sheets/roll. Blue.

G1771052 **\$2.44**

### SCOTT Rags-in-a-Box

Built-in handle offers portability while keeping rags clean. Ideal for painting, spill cleanup, staining and refinishing furniture. Double re-creped material. 10" x 13" size. 200 towels/box.

G3076367 **\$11.86**



### GEORGIA PACIFIC Brawny Industrial Perforated Roll Towels

Lightweight all-purpose double re-creped (DRC) wiper offers excellent softness, strength and absorbancy. Designed for water- and oil-based cleanups. 11" x 9¾" sheets. 84 sheets/roll.

G0398885 20-pack **\$51.99**

### SCRUBS Hand Cleaner Towels

Citrus-based formula is combined with a tough, textured blue towel to loosen, dissolve and absorb dirt and grease. Alcohol-free with aloe and vitamin E. 10" x 12" sheets. 72 towels/bucket.

G5192521 **\$11.49**





**SIMPLE GREEN Cleaner Degreaser**

Concentrated formula allows you to custom dilute to clean just about anything. Water-based liquid concentrates are nontoxic, biodegradable, nonhazardous, phosphate-free and VOC compliant. Sassafras fragrance.

✓ READILY BIODEGRADABLE PER OECD OR ASTM STANDARDS, VOC LEVEL PER SCAQM2 REQUIREMENTS

- G4603444 24 oz bottle **\$4.99**
- G4602315 1 gal bottle **\$13.69**
- G4553762 2.5 gal pail **\$33.67**
- G4602297 5 gal pail **\$50.59**

**SCRUBS Multi-Surface Metal Polishing Wipes**

Premoistened cloths offer the benefits of traditional polishing products in a single, easy-to-use cloth. Clean, polish and protect metal surfaces—resists fingerprints and streaking. Ideal for use on brass, copper, gold and silver. Resealable pack prevents cloths from drying out. Pre-moistened. 8" x 11" sheets. 18-wipe packet.


G0276157 **\$7.09**



**3M Scotch-Brite Scouring Pads #96**

Synthetic pad is ideal for most common cleaning jobs. Non-rusting and resilient, this synthetic pad is an ideal replacement for steel wool or stainless steel scrubbers. 6" x 9" pad.

G1776092 20-pack **\$11.05**



**DIVERSEY Profi Floor Cleaner/Oil and Grease Remover**

Specifically designed to clean, shine and protect specialty floors such as rubber. Highly effective, solvent-free formula emulsifies dirt quickly. White in color with a surfactant scent. Recommended dilution varies. 1gal jug.

G2076907 **\$24.14**



**BLUE MAGIC Metal Polish Cream**

Great on brass, copper, sterling silver, aluminum, stainless steel or gold. Removes tarnish and oxidation. Metal protecting agent provides a lasting protective coating. 19% oz tub.

G0778653 **\$7.19**



**VALUE BRAND Spray Bottles and Trigger Sprayer**

Round spray bottles feature molded-in oz/mL gradations and dilution scales. Nozzle adjusts from fine-mist to jet-stream.

- G3437463 trigger sprayer **\$0.99**
- G1058373 24 oz bottle **\$0.99**
- G1384546 32 oz bottle **\$1.09**



**WINDEX Original Glass Cleaner**

Cleans with Ammonia-D for a streak-free shine. Loosens soil upon contact. Also cleans chrome, stainless steel, mirrors, ceramic tile, enamel, plastic and other hard surfaces. Contains no phosphates. ■ NSF STANDARDS

- G1254206 32 oz bottle 12-pack **\$47.99**
- G1288892 1 gal jug each **\$9.36**



**SPRAYWAY Glass Cleaner**

Excellent for glass, mirrors, chrome, plastic, stainless steel and other surfaces. Ideal for use in the kitchen, living room, patio, bedroom, bathroom or car. Floral fragrance. 19 oz aerosol can.

G0509494 **\$2.54**

**VALUE BRAND Janitor Cart**

Designed to save space yet versatile enough for most jobs. Accommodates common cleaning items and waste collection. Perfect for use in confined areas with limited storage space. Long-lasting 8" wheels and 3" swivel casters are nonmarking. Polypropylene construction. Includes zippered vinyl utility/refuse bag. 19 3/4" w x 56" d x 38" h.

G0615903 **\$104.99**



**RUBBERMAID Janitor Cart**

Designed with a high storage capacity to hold necessities and an easy-emptying zippered vinyl trash bag. Large front platform accommodates most buckets. Long-lasting 8" wheels and 4" swivel casters are nonmarking. Includes bumper and trash bag holders. Structural web plastic. 21 3/4" w x 46" d x 38 3/8" h.

G2184454 **\$140.96**

**GOO-GONE Pro-Power Multi-Use Degreaser**


Removes gummy, sticky and gooey substances. Can be used on hard surfaces, carpeting, upholstery, clothing and much more. Ready-to-use—no dilution required. Citrus fragrance. ■ HHS, NFPA, OSHA STANDARDS

- G3300351 8 oz bottle 12-pack **\$34.98**
- G2590831 1 qt jug each **\$6.99**





**SIMPLE GREEN d Pro3 Disinfectant Deodorizer**

This one-step hospital-grade germicidal cleaner is for use on hard surfaces. Virucidal and fungicidal, it is effective against serious public health concerns including HIV-1, MRSA, E.coli, Influenza A (H1N1), pseudomonas, salmonella, staph and athlete's foot fungus. 1:64 recommended dilution. Herbal, light pine fragrance.  EPA REGISTERED

- G1809035 32 oz bottle **\$6.99**
- G3246284 1 gal bottle **\$19.99**
- G3073655 5 gal pail **\$60.99**



**CLOROX Disinfecting Wipes**

Clean and disinfect with one convenient wipe. Bleach-free formula kills 99.9% of bacteria, including staph and salmonella. For use on hard, non-porous surfaces. Lemon fragrance. 7" x 8" sheets. 35 sheets/canister.

- G2603885 lemon
- G2267273 fresh scent
- 12-pack **\$32.99**



**MICROBAN Disinfectant Spray Plus**

Ready-to-use formula kills bacteria, mold, mildew and fungi. 1gal jug.

- G2564186 mint
- G1767787 unscented
- each **\$40.00**



**MICROBAN Germicidal Cleaner Concentrate**

Germicidal cleanser kills germs. 2oz/gal recommended dilution. Mint fragrance. 1gal jug. G2421571 **\$31.00**


**VALUE BRAND Bathroom Cleaner**

Ready-to-use disinfectant bowl cleaner provides bacterial control against many organisms found predominantly in restroom areas—cleans, disinfects and deodorizes toilet bowls and urinals. Non-acid formula is safe for daily cleaning. Fresh fragrance. 1qt bottle.

-  EPA REGISTERED
- G2918955 **\$2.99**



**VALUE BRAND Disinfectant Spray**

Ready-to-use spray prevents mold and mildew growth on hard surfaces. Eliminates odors from waste, trash receptacles, stale air and smoke. Professional-quality spray is tuberculocidal, virucidal, fungicidal and bactericidal. Bouquet fragrance. 20oz aerosol can. 16 oz net weight.  EPA REGISTERED

- G3257177 **\$2.59**



**VALUE BRAND Iron-Style Scrub Brush**

Plastic handle helps keep hands out of cleaning solutions and water. 6" block. 1½" white synthetic bristles.

- G0927001 **\$2.29**



**VALUE BRAND Sparta Utility Scrub Brush**

Versatile design for a wide variety of general-purpose applications. Base resins used to produce blocks and bristles are constructed of FDA-approved materials. Color-coded products promote safe food handling practices and help minimize the risk of cross-contamination between work zones. 17" plastic handle. 3" x 3" brush with 1½" polypropylene bristles.

► MORE SIZES ONLINE

- G0782661 red
- G1575856 blue
- G1318712 white
- G0497043 yellow
- each **\$3.99**



**VALUE BRAND Scratch Brush**

Clean threads, files, metal parts and castings—removes rust, paint, scale and solder. Stainless steel wire recommended to clean aluminum and stainless steel materials. 7" curved plastic handle. ½" trim (3 x 7 rows).

- G1897366 5-pack **\$8.99**



**VALUE BRAND Deluxe Toilet Bowl Mop**

Acid-resistant polypropylene strands make for easy cleanups. 14" plastic handle.

- G0908573 **\$0.99**



**PDI Super Sani-Cloth Germicidal Disinfecting Wipes**

Clean, disinfect and deodorize hard nonporous surfaces. Wipes have 55% alcohol for faster kill times. Latex free, bleach free and phenolic free. 6" x 6¾" sheet. 160 wipes/container.

- G4099943 **\$7.28**



**GOJO Scrubbing Wipes**

Dual-textured material is premoistened with cleaning solution to lift heavy dirt and grime from skin. Contains skin conditioners formulated to help prevent dryness and irritation. Orange fragrance. 10½" x 12¼" sheets. 170 sheets/bucket.


- G2467683 **\$36.69**



**VALUE BRAND Janitor Hand-Held Dust Pain**

Durable, 1-piece construction is made from 20-gauge steel with corrugated ribs for rigidity and strength. 12" width.

- G1951485 **\$4.53**

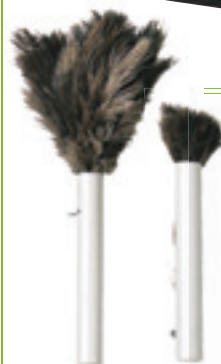

**TOLCO Hand-Held Duster**

Retractable duster features ostrich feathers and a plastic handle. 14" length.

- G4241973 **\$5.49**





MORE THAN 400,000 ITEMS ONLINE

**SKILCRAFT Dust Mop Kit**

Mop smooth, bare, dry floors clean. Looped-end cotton dust mop head with wire frame attached to a 53" wood handle.

G2358456 kit **\$19.99**  
kit includes: dust mop, frame and handle



**VALUE BRAND Mop Handles**

For use with band top mops. 60" wood handle. Metal frame.

G2996497 quick change **\$8.59**  
G2086892 wing nut **\$8.99**



**SKILCRAFT Cut-End Wet Mops**

High grade, industrial cut-end degradable mop head is constructed with 100% recycled yarn and narrow 1/4" wide cotton twill headband with untaped ends. 8-ply cotton/synthetic blend.

G3357112 12 oz **\$2.99**  
G0685623 16 oz **\$3.69**  
G3418886 20 oz **\$4.49**  
G2133336 24 oz **\$4.99**



**BONA Pro Series Hardwood Floor Cleaner**

Professional strength, non-toxic, waterborne hardwood floor cleaner. Formulated for all types of hardwood floors coated with a clear, unwaxed finish.

GREEN GUARD CERTIFIED, READILY BIODEGRADABLE PER OECD OR ASTM STANDARDS  
G0619297 32 oz **\$4.56**  
G2847555 1 gal **\$15.04**



**EAGLE Butt Can**

Receptacle offers a place for clean and safe disposal of ashes and cigarettes. Polyethylene tube helps keep rain water out and unsightly butts in. Tube is removable for emptying can. Stainless steel can. ■ FM STANDARDS

▶ MORE COLORS ONLINE  
G0003866 2 gal (35" height) **\$24.10**  
G0003884 5 gal (40" height) **\$26.89**



**VALUE BRAND Cut-End Dust Mop**

Disposable lightweight cotton mop features slit-back construction with ties. Fits standard dust mop frames and handles. 4-ply. 36" x 5".

▶ MORE SIZES ONLINE  
G0508286 **\$5.99**



**VALUE BRAND Dust Mop Frame**

Metal frame resists rust. Slide-on connection. 36" x 5". ▶ MORE SIZES ONLINE  
G2209925 **\$3.99**

**VALUE BRAND Dust Mop Handle**

Clip-on design adjusts from free-swivel action to rigid position. For use with metal frames. 60" natural wood handle.  
G0587072 **\$6.99**



**VALUE BRAND Push Broom**

Brushes provide scratch-free sweeping on wood, ceramic tile, linoleum, smooth concrete, marble and polished surfaces. Flagged tips pick up small particles. For use with threaded handles. Includes a solid metal brace. 3" flagged synthetic fill. 36" hardwood block.

G2355656 **\$23.99**

**VALUE BRAND Threaded Handle**

For use with floor and garage brushes, industrial coatings and general-purpose wash brushes. 5' natural hardwood handle. 1" threaded metal tip.

G1139993 **\$3.99**



**RUBBERMAID Floor Sign**

Folding design is convenient for storage or transport on janitor cart. Narrow body and unique plastic arm allow non-obstructive placement in a variety of locations. Durable, two-sided bright yellow polypropylene construction. 25" height.

G0885936 **\$10.34**



MORE WET FLOOR & SPILL CLEAN-UP ITEMS ON PAGE 15

G2679031 safety first  
G3088373 wet floor  
G2464357 caution

**RUBBERMAID Folding Floor Sign**

Sign folds with a twist to fit into compact storage shell. Made of spring steel and durable, cleanable fabric. Storage shell mounting hardware includes tape, strap and screws. Multilingual "caution" with wet floor symbol. Nylon construction. 20" high.

■ ANSI STANDARDS  
G2033945 **\$21.79**



**RUBBERMAID Tandem Bucket and Wringer Combo**

All-in-one compact design means more effective wringing and no more lost parts. Polypropylene bucket features a down-press side pressure wringer. 3" non-marking casters. 24 oz mop capacity. 31 qt capacity.

G2564493 **\$44.82**



**RUBBERMAID WaveBrake Side Press Combo**

Patented mop bucket system helps prevent workplace hazards associated with spills and splashes. Baffles reduce wave motion while bucket is being transported. Polypropylene structural web construction. Side-press wringer. 3" nonmarking casters. 32 oz mop capacity. 35 qt capacity.

G3208974 **\$65.43**



**DAYTON Contractor High-Airflow Wet/Dry Vacs**

High-airflow vacuums contain a single-stage bypass motor with quiet operation motor housing.. Features include a polyethylene tank, top handle, easy access "on/off" switch, cord wrap, 2-latch lid for easy emptying, high-quality cartridge filter, foam sleeve, onboard tool storage, convertible blower port. 210 cfm. 60" static pressure. 6.5 HP peak. 12 A @ 120 V. 60 Hz. ■ CUL, US STANDARDS

**16 Gallon Tank**

8.25 gal wet capacity, 14 gal dry capacity. Includes 8' x 2½" Lock-On hose with holder, extension wands (2), 14" floor nozzle with brush, utility nozzle, crevice tool, elbow grip, concentrator nozzle, tank drain, high-efficiency collection bag filter, on-board tool storage holster, integral wide-stance caster system and 18' cord. 21½" w x 20¾" d x 26" h.

G3318646 **\$162.89**

**32 Gallon Tank**

25 gal wet capacity, 31 gal dry capacity. Includes 8' x 2½" Lock-On hose with holder, extension wands (2), 14" floor nozzle with brush, utility nozzle, crevice tool, elbow grip, concentrator nozzle, tank drain, tool storage basket, large rear wheel dolly with two 10" fully pneumatic treaded tires, transport handle and 20' cord. 36" w x 30" d x 38" h.

G1566153 **\$275.35**



**DAYTON Indoor/Outdoor Vacuum**

Quickly and easily cleans small to medium areas. Collecting litter, dirt and debris from any hard-surface area or low-nap commercial carpeting. Heavy-duty nylon impeller mulches as it cleans. 19" wide nozzle with 1½" intake has two height settings and an easy-access "on/off" switch. 8 gal filter/collector bag has a zipper for easy emptying. Built-in kickstand. Single-stage motor. Double insulated. 12" cord. 300 cfm. 120V. 6 A. 60 Hz.

G0871893 **\$178.24**

**SANITAIRE Commercial Upright Vacuum**

Offers bagless filtration with an extra large dirt cup. Clean-air system can help improve indoor air quality. Features a nonmarking wraparound furniture guard. Reinforced stretch hose provides a cleaning reach of 11'. Ergonomic handle. 15" cleaning path. 7-position height adjustment. Washable sealed HEPA filter. Quiet 69 dB may contribute to LEED credits. Includes crevice wand, extension wand, dusting brush and 40' cord. 135 cfm. 10 A. 120 V.

■ OSHA, UL, CRI STANDARDS  
 ✓ CRI GREEN SEAL OF APPROVAL

G2478271 **\$229.74**



**HOOVER PortaPower Lightweight Vacuum Cleaner**

Lightweight portable design makes this vacuum easy to carry. Stretch hose offers extended reach. Convenient fingertip on/off switch. Includes triple stretch hose, crevice tool, wall/floor brush, dusting brush, furniture nozzle, rug/floor nozzle, chrome steel extension wands (2), cord storage strap, shoulder strap, 33½' cord and reusable commercial cloth bag. 0.5 gal tank. 7.4 A. 120 V. 60 Hz. 7" w x 18" d x 11" h. 8.3 lb net weight.


■ UL, OSHA STANDARDS  
 G4334662 **\$127.04**



**NOTRAX #117 Heritage Rib Indoor Carpeted Entrance Mats**

Designed to capture 80% to 90% of dirt from foot traffic when used as a complete entrance matting system. Linear high/low rib design provides excellent directional scraping and retains moisture while trapping debris. Vinyl backing helps protect floors while providing exceptional performance in highly visible environments. Beveled edge on all sides helps minimize tripping. ¾" thickness. 3' x 5'. ► MORE ONLINE

G0148276 *brown*  
 G0148285 *charcoal*  
 G0148267 *gray*  
 each **\$34.14**

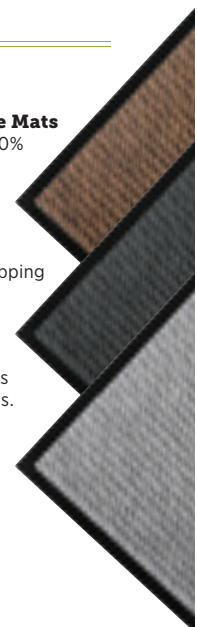

**A. R. NORTH AMERICA Blue Clean Electric Cold Water Pressure Washer**

Pressure washer features automatic safety valve with pressure shutoff at the head and TSS (Total System Shutdown) motor that starts and stops when the spray gun is opened and closed. Portable, wheeled design. 3-piston axial pump with direct drive. Tempered stainless steel plungers. Includes foam dispenser, ¼" x 20' hose, QC garden hose connection, 0 to 60° variable spray nozzle, turbo lance and hose reel. GFCI protected. 1,900 psi operating pressure. Usable 0 to 10 hr/wk. 1.5 HP. 120 V. 14 AAC. 12" w x 13" d x 29" h. 29 lb net weight. ■ CE, GS, UL STANDARDS

G1277997 **\$163.56**







**RUST-OLEUM GlowMax Spray**

Multipurpose glow-in-the-dark spray provides long-lasting safety illumination for 8 to 12 hours. Protects against wear, chemicals and solvents in everyday industrial applications. For use on concrete and steel surfaces in both interior and exterior conditions. 4-hour dry time. 9 to 12 sq-ft coverage. Flat finish. 15 oz can.



G2242861 *luminescent green* **\$21.34**  
G2585186 *safety yellow* **\$21.34**

**RUST-OLEUM High Performance V2100 System Enamel Aerosol**

Fast-drying enamel provides excellent corrosion protection, as well as color and gloss retention. Resists chipping, cracking and peeling. Protecting or touch-up handrails, piping, tanks, machinery, racks, equipment, metal doors and conveyors. For use on metal, concrete, masonry and wood surfaces in mild to moderate conditions indoors and out. 1- to 2-hour dry time. 14 sq-ft coverage. 15 oz can. ■ VOC, MIR STANDARDS

▶ MORE ONLINE

**Primers**

Fast-dry formula improves paint adhesion and topcoat color consistency on rusted, bare or previously painted metal. Flat finish.

G2563303 *red* **\$4.99**  
G0953784 *gray* **\$4.99**



**High Temperature Finishes**  
Durable, self-priming coatings resist temperatures up to 1000°F. Flat finish.

G1439261 *black* **\$4.99**  
G2040455 *aluminum* **\$4.99**

**Standard Finishes**

Most colors match Rust-Oleum Industrial Enamels for convenient touch up.

G2238397 *safety yellow (gloss finish)* **\$4.99**  
G0697952 *safety blue (gloss finish)* **\$4.99**  
G1906974 *black (flat finish)* **\$4.99**  
G1509076 *white (gloss finish)* **\$4.99**  
G2820221 *light gray (gloss finish)* **\$4.99**



**PREMIER Home-Pro Mini Series Paint Roller Frames**

Frames feature a plastic handle and ¼" chrome-plated steel shank.

**12" Length**  
For use with 4" rollers.  
G2725362 **\$1.93**

**14" Length**  
For use with 6½" rollers.  
G3443964 **\$1.92**



**PREMIER Paint Roller Frame**  
Mini paint roller frame features a 4-wire cage, plastic threaded handle and ¼" chrome-plated steel shank. For use with 4" rollers. 12" overall length.  
G0733774 **\$1.06**

**VALUE BRAND Paint Roller Frame**

Roller frame features a plastic threaded handle and zinc-plated shank. For heavy-duty use with 9" rollers.

G0768065 **\$1.05**



**VALUE BRAND Chip Brushes**

Flat sash brushes feature white China bristles. For use with water- and oil-based paints. Ideal for stains, glues and roof coatings. Unfinished natural wood handle with tin-plated ferrule. 1½" brush length.

▶ MORE SIZES ONLINE

G3167893 1" 36-pack **\$14.38**  
G2577635 2" 24-pack **\$15.71**



**VALUE BRAND Bent Radiator Brush**

Bent design is made to reach behind pipes, furniture and other fixtures. For use with oil-based paints, enamels, polyurethanes and stains. Long unfinished natural wood handle with brass-plated steel ferrule. Black synthetic and China bristles. 2¾" brush length. 2" size.

▶ MORE SIZES ONLINE

G1554454 **\$7.48**

**VALUE BRAND Oval Sash Brush**

Designed for added control and smooth layoff. For use with oil-based paints and stains. Mixed filament with polypropylene handle and stainless steel ferrule. 2¾" brush length. #8 size.

▶ MORE SIZES ONLINE

G2824236 **\$4.62**



**PREMIER Home-Pro Mini Series Paint Roller Covers**

Perfect for hard-to-reach areas—use with water- and oil-based paints. 4" roller with plastic core.

**Yellow Spiral**  
For semismooth to semirough surfaces. ½" nap.

G1562626 10-pack **\$8.18**

**High-Density Foam**  
For smooth surfaces. For use with enamels and varnishes.

G0992302 10-pack **\$11.59**



**PREMIER Paint Roller Covers**

For use with water- and oil-based paint on semi-smooth surfaces. Polyester cover with polypropylene core. ¾" nap. 9" length.

G0896795 2-pack **\$2.19**  
G2135883 6-pack **\$6.89**



**WOOSTER Paint Tray & Liner**

Deluxe steel paint tray is rust-resistant with a deeply ribbed bottom. For use with any standard 9" roller. Tray liners fit in metal tray—disposable for easy clean up. 1 qt capacity.

G1850116 *metal tray* **\$2.55**  
G2385117 *tray liner* **\$0.68**

**IDEALFOLD Cheesecloth**

Cheesecloth is a lightweight cotton fabric of open texture—grades indicate the number of threads in each direction. For use with paints, stains, cleansers and polishers. 4-ply cotton. 36" width. Bleached white.

G2630223 *grade 10 (80 yd)* **\$38.30**  
G2789044 *grade 40 (70 yd)* **\$43.01**  
G0595725 *grade 50 (70 yd)* **\$56.93**



**VALUE BRAND Drop Cloths**

Washable, heavy-duty 8 oz canvas drop cloths are double-stitched with mildew-resistant thread. Labeled "This Side Up", with seams on the underside to minimize trip hazard. Off-white.

G1777526 4' x 15' **\$14.99**  
G2450034 9' x 12' **\$17.45**  
G1940285 12' x 15' **\$49.72**



**SUNNYSIDE Mineral Spirits**

Solvent-based paint thinner is used for the thinning and cleanup of oil-based paints. Apply with a brush or roller. Low odor. 1gal can.

G2783322 **\$9.53**



**SUNNYSIDE**

**Lacquer Thinner**

Solvent-based paint thinner is used for the brushing, dipping and spraying of nitrocellulose lacquers. Apply with a brush, roller or cloth. Low odor. 1gal can.

G2281693 **\$9.51**

**RUST-OLEUM Rust Reformer**

Chemically transforms rust on metal surfaces into a tough barrier against further corrosion in 1 step. Apply to rusted steel surfaces with a brush, roller, spray gun or aerosol. 1-hour dry time. 590 to 1,175 sq-ft coverage. Acrylic enamel resin. 1gal bottle.

G2671891 **\$69.99**



**RUST-OLEUM EpoxyShield Professional Floor Coating Kit**

Easy-to-apply, 2-component finish strengthens and protects concrete floors and walls in mild and moderate conditions. Resists chemicals and standing water. Use roller to apply to concrete surfaces. Less than 250g/L VOC. 300 to 400 sq-ft coverage. 2gal.

- G1407253 *clear (high gloss)* **\$90.99**
- G0528367 *silver gray (semi-gloss)* **\$91.85**
- G1263936 *dunes tan (semi-gloss)* **\$92.85**
- G0672287 *tile red (semi-gloss)* **\$93.99**
- G1936925 *dark gray (semi-gloss)* **\$98.32**



**CAMPBELL HAUSFELD Airless Spray Gun Kit**

Constructed of aluminum and steel, spray gun features 0.015" reversible nozzle. Includes spray gun, 25' hose, tip and 100 mesh filter. For use with PS241D. 3,000 psi (max). ¼" inlet.


G0872252 **\$119.99**



**BINKS SV100 Series HVLV Pressure Feed Manual Air Spray Gun**

For use with very low to medium viscosity paint. Use with pressure cup or tank. Includes tips. 12 cfm @ 45 psi. ¼" inlet. 1.1mm nozzle. 12" pattern.

G2061595 **\$199.99**

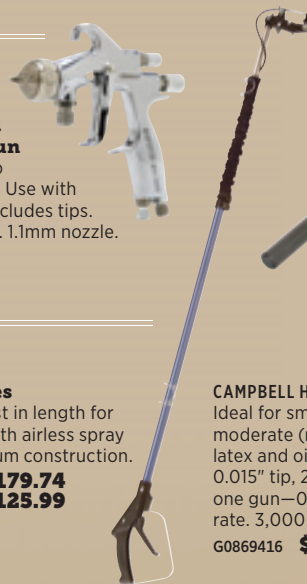

**HYDE Extension Poles**

Telescoping poles adjust in length for better reach. For use with airless spray guns. Anodized aluminum construction.

- G3383423 *5½' to 8½'* **\$179.74**
- G3052262 *7½' to 12'* **\$125.99**

**CAMPBELL HAUSFELD Airless Paint Sprayer**

Ideal for small commercial paint jobs— designed for moderate (monthly) use. For use with oil-based stain, latex and oil-based paints. Includes metal spray gun, 0.015" tip, 25' hose, long filter and portable cart. Supports one gun—0.017" tip (max). 150' hose (max). 0.34 gpm flow rate. 3,000 psi (max). ¼ HP. 115 VAC. 7.9 AAC.

G0869416 **\$419.99**



**WALLPAPER STRIPPER & PERFORATOR**

Tools provide safe, effective wallpaper removal—ideal for rental, contractor and professional decorator applications.

**HIRETECH Wallpaper Perforator**

Chrome-plated spiked spiral rollers perforate wallpaper without damaging wall surfaces for easy removal. Features an angled V-head design and 21" steel tube with soft rubber grip handle.

G0720395 **\$50.99**



**HIRETECH Steam Wallpaper Stripper**

Just fill with tap water and plug in to produce steam that loosens paper with minimal risk of damage to wall surfaces. Runs up to 90 minutes before shutting off automatically. Anti-scald feature cools tank within 2 minutes. Rolls easily on casters. 1.5 gal tank. 13' hose. 115 VAC. 13' cord.

G2089586 **\$499.99**



**ALLEGRO Paint Spray Socks**

Stretch knit cotton material covers head to protect from overspray. Universal size.

G0971381 12-pack **\$9.43**



**PAINTER'S TAPES ON PAGE 141**

- G3902254 ¼" x 180'
- G4242201 ½" x 180'
- G4040382 1½" x 180'







**IGL00 Beverage Coolers**

Base of each cooler features Cool Riser Technology to help keep contents cooler for longer time periods. Industrial-grade coolers maintain ice for up to 3 days in temperatures as high as 90° F. "Drinking Water" imprint meets OSHA labeling requirements for water used on jobsites. Plastic coolers have ultratherm foam insulation and feature a pressure-fit, push-on lid. Front push-button spigot is drip-resistant and easy to use with work gloves. Molded handles make for easy transport. BFA-free.

- G2454611 2 gal **\$21.99**
- G1713643 3 gal **\$29.69**
- G0881991 5 gal **\$34.64**
- G1901261 10 gal **\$51.99**



**GATORADE Thirst Quencher Drink Mixes**

Drink mixes have a blend of electrolytes and carbohydrates to help speed hydration and restore energy. Caffeine-free. Mix with water per instructions. 21oz packs—makes 2½ gal.

► MORE ONLINE

- G3109687 fruit punch
  - G3126514 lemon lime
  - G2537622 orange
  - G1212592 glacier freeze
  - G1146494 riptide rush
- each **\$3.49**



**SQWINCHER Freezer Pops**


Helps replenish electrolytes and minerals needed for hydration—ideal for high-heat environments. 3 oz.

- G0284304 150-pack assortment **\$27.29**
- assortment includes: grape, mixed berry, lemon-lime, cherry, orange

**VALUE BRAND Screw-In Earth Anchors**

Designed to eliminate the need to dig or use concrete to secure valuable items. Anchors can be used to tie down tarps, tents, shelters and outdoor furniture without installing posts. Anchors have welded screw-in base to easily dig into all types of soils. Rust-resistant red-painted steel.

- G3000873 3" x 15" **\$2.25**
- G3226833 3" x 30" **\$3.35**
- G1523803 4" x 40" **\$5.42**
- G2937216 6" x 48" **\$9.45**




**VALUE BRAND Pistol Grip Nozzle**

Nozzle is constructed of die-cast metal and features an insulated handle and adjustable spray. 160°F (max). 100 psi (max). G2122556 **\$9.99**



**VALUE BRAND Pistol Grip Nozzle**


Nozzle is constructed of powder-coated die-cast zinc and features a lock-on clip and adjustable spray. 100°F (max). 60 psi (max). G0574244 **\$4.99**



**SWAN Premium Reinforced Rubber Hoses**

High-grade tube provides greater pressure capacity and flexibility. Dual radial reinforcing offers maximum burst strength and kink resistance. Octagonal GHT coupling. 160°F operating temp. ¾" diameter.

- G2787626 25' (600 psi) **\$17.99**
- G1267944 50' (400 psi) **\$32.99**



**SWAN Reinforced Rubber Hose**

Heavy-duty construction with industrial reinforcing offers maximum abrasion resistance. Crushproof GHT coupling. 200°F operating temp. 400psi (max). ¾" diameter. 50' length.

- G1544347 **\$35.49**



**VALUE BRAND Instant Canopy**

Canopy is water, flame and mildew resistant. Includes frame, roof cover, roller bag and anchor kit. 300D UV blocking polyester. Steel frame. 10' x 10' coverage area. 6'4" to 7' side height. 11'6" center height (max).

- G2700397 **\$124.99**

**VALUE BRAND Snow Load Shelter**

A-frame design has 8 legs and interchangeable corner brackets. Shelter features a 4-piece roof truss system that doubles the roof load capacity to 17.6 lb/sq-ft—3,800 lb maximum. Each of the two sidewalls contain three windows with roll-up covers. Front- and rear-door walls have dual zippers and can be rolled up and secured with hook-and-loop straps. When walls are not in use, valances can be attached for a more decorative look. Includes frame, roof cover, sidewalls, bungees, foot plates (8), stakes (8) and reinforced wire. 6 oz UV blocking polyethylene. Steel frame. 20' x 10'8" coverage area. 9' x 7'8" door. 6'8" side height. 10' center height.

- G4271111 **\$324.99**



**AMES Hose Reel**

Molded polypropylene guide allows for 180° arc when pulling hose off or winding it on the reel. Holds ½" hose (125'), ¾" hose (100') or ¾" hose (75'). Includes 4' leader hose with brass coupling.

- G3395971 **\$28.18**



**LIBERTY Hose Reel**

Multi-mount reel features 13-gauge steel construction and can be mounted to the wall, floor or ground. Holds a ½" hose (225'), ¾" hose (200') or ¾" hose (125'). Includes a 5' leader hose.

- G1274962 **\$109.99**



**LIBERTY Hose Cart**

Portable cart features 13-gauge steel construction and pneumatic wheels. Holds a ½" hose (325'), ¾" hose (300') or ¾" hose (200'). Includes a 5' leader hose.

- G0655523 **\$149.59**



**FISKARS Rain Barrel System**

Barrels collect and store rainwater for later use or can be used to divert roof runoff from the downspout. Snap-tight solid lid is child- and insect-resistant. Threaded spigot located high on the barrel, allows the water below to both stabilize the barrel and to provide an easy means of filling water cans—can be used with both garden hoses and soaker hoses. Tall, narrow design provides increased water pressure. UV-protected resin construction. Includes connector hose and downspout diverter kit. 48 gal capacity. 28½" w x 20" d x 24¾" h

G1388317 **\$83.99**



**FISKARS Diverter Pro Rainwater Diverter Kit**

Diverts water from the rain barrel into the downspout when the barrel is full. Removable filter captures debris. Easily hooks up to a standard 2" x 3" or 3" x 4" gutter. Polypropylene construction.

G2281851 kit **\$40.91**

*kit includes: removable filter, 3" x 4" diverter with 2" x 3" couplings (2), 36" connector hose, connector, spigot*

**CHAPIN Lawn and Garden Sprayer**

Lightweight portable sprayers are ideal for smaller jobs. Use for weed control, pesticides and fertilizing. Features include a wide 4" funnel top, anti-clog filter and translucent bottle. 2 gal polyethylene tank. 18" polyethylene wand. Adjustable cone nozzle. 34" vinyl reinforced hose. 35 to 45 psi.

G3594841 **\$13.75**



**FIMCO Trailer and ATV Spot Sprayers**

Large enough to apply insecticides and herbicides to lawns, acreages, fence rows and ditches. Sprayers are made of polyethylene and include a full-length drain sump and handgun nozzle. 15' EPDM rubber hose. 12V diaphragm pump. Adjustable cone-shaped pattern nozzle. 2.1 gpm. 60 psi. 25' vertical range. 35' horizontal range.

G2224887 15 gal **\$205.34**  
G3055647 25 gal **\$177.99**



**CHAPIN Backpack Sprayers**

Use to spray fertilizer, herbicides, insecticides and pesticides. Features include a plastic gun, 4" filtered opening, pressure gauge, padded shoulder straps and polyethylene shut-off valve. 4 gal polyethylene tank. 18" wand. Adjustable cone, fan nozzle. 48" hose. 15 to 60 psi.

G1766947 stainless steel wand **\$66.89**  
G2674174 brass wand **\$88.35**



**JT EATON Kills Bedbugs and Crawling Insects Powder**

Effective against bed bugs. Diatomaceous earth formula also kills fleas, roaches, earwigs, silverfish and ants. 7 oz bottle. G0284681 **\$4.54**



**JT EATON Kills Bedbugs II Spray**

Effective against bed bugs. Deltametharine formula also kills fleas, ticks and spiders. 1 gal jug. G1296671 **\$21.33**



**JT EATON Answer Boric Acid Insecticidal Dust**

Boric acid powder kills crawling insects including cockroaches, ants, fleas, silverfish and palmetto bugs.

G1992654 16 oz bottle **\$3.14**  
G3233702 5 lb pail **\$16.99**



**EARTHWAY Commercial-Duty Spreaders**


Spreaders feature sturdy powder-coated steel tube frames and large pneumatic tires that roll easily over most terrains. Rod linkages provide improved material control and stainless steel axles resist corrosion. Enclosed gears. 100 lb capacity. 10' spread. Rod flow control. 3-hole drop. Pneumatic wheels.

G2822172 tow behind **\$189.74**  
G0476761 push **\$147.66**



**VALUE BRAND Fence Post Driver**

Weighted and reinforced steel head provides 17 lb of power, making it easy to use while minimizing damage to post tops. Loop handles are tapered for comfortable hand placement. 9-gauge painted steel tube. 2¾" inner diameter. 24" height. 17.5 lb. G2392467 **\$26.99**



**JACKSON Kodiak Post Hole Digger**

For digging into hard, heavy gravel soils. 48" hardwood handle. 6¼" between blade tips. G3264624 **\$44.99**



**VALUE BRAND Square Point Shovel**

Shovel features a straight handle and forward-step, extended socket blade. 48" natural ash handle. 9½" x 11¼" steel blade. G1416502 **\$17.99**



**NUPLA Round Point Shovel**

Shovel features a ergonomic straight handle and forward-step, E-series open-back blade. 48" fiberglass handle with polypropylene outer jacket. 9" x 11½" steel blade. G3295162 **\$25.99**



**NUPLA Garden Spade**

Spade features an ergonomic straight handle and E-series open-back blade. 48" fiberglass handle with polypropylene outer jacket. 7½" x 11½" steel blade. G0483183 **\$29.79**



**REMCO Hygienic Shovels**

Ideal for use where cross-contamination is a concern. Chemical and corrosion resistant. Polypropylene construction. 14" x 17" blade. 42" length. FDA, USDA STANDARDS

G0148407 white **\$31.99** each  
G0148373 green  
G0148416 yellow  
G0148391 red







# MATERIAL HANDLING



CASTERS  
// page 93

NEED STORAGE, LADDERS, CARTS OR HOISTS?  
ZORO HAS EVERYTHING YOU NEED **AND** MORE!


Pull! Lower! Lift! Climb! No, this isn't an exercise class. This is Zoro Material Handling. For the warehouse, the garage, the dock, the house—we have everything you need to store, move and control your materials safely! Be sure to check out the over **15,000** material handling items available on our website.



DRUMS  
// page 90



RACKS  
// page 86, 87



HOISTS  
// page 94, 95




LADDERS  
// page 88, 89



BINS  
// page 83



GATES  
// page 91



STORAGE CABINETS  
// page 84, 85

## POPULAR BRANDS

ALBION®

CM

WERNER

AKRO-MILS

LOUISVILLE LADDER

edra!

TANIS INCORPORATED

DURHAM MFG Est. 1922

SKOLNIK

Hailo


SUNCAST

Rubbermaid Commercial Products

more BRANDS online



CARTS  
// page 92, 93

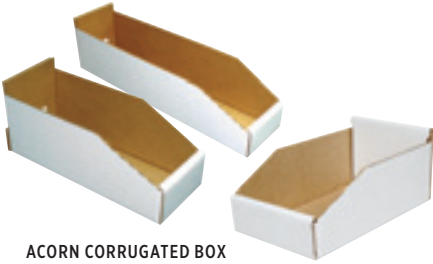


**ACORN CORRUGATED BOX  
Corrugated Shelf Bins**

B-flute corrugated board with self-locking construction is sturdy, durable and easy to assemble. White oyster finish can be written on, making labels unnecessary. Fits 12", 18" and 24" deep commercial and industrial shelving. Hopper-style front with 4-ply handylock lip.

- ▶ MORE SIZES ONLINE—DIVIDERS ALSO AVAILABLE
- ▶ MINIMUM 30% RECYCLED CONTENT AND COMPLETELY RECYCLABLE

G3782834	2¼" w x 11" d x 4¾" h	<b>\$0.49</b>
G3783412	4¼" w x 11" d x 4¾" h	<b>\$0.59</b>
G3783814	6¼" w x 11" d x 4¾" h	<b>\$0.89</b>
G3783324	8¼" w x 11" d x 4¾" h	<b>\$0.79</b>
G3783351	4¼" w x 17" d x 4¾" h	<b>\$0.79</b>
G3783762	6¼" w x 17" d x 4¾" h	<b>\$0.79</b>
G3783744	8¼" w x 17" d x 4¾" h	<b>\$0.79</b>

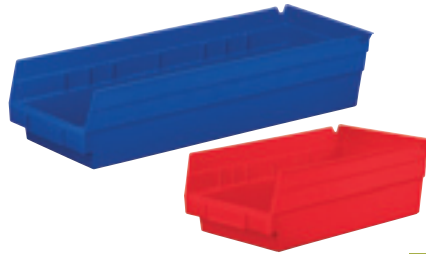

**AKRO-MILS Shelf Bins**

One-piece construction is waterproof and unaffected by grease or oil. Sturdy industrial grade polymer shelf bins are ideal for use with 12", 18", and 24" deep shelving or vertical storage and retrieval units. Optional black industrial grade polymer dividers and removable bin cups are sold separately.

- ▶ MORE SIZES AND COLORS ONLINE

blue	red	description	price
G0623296	G3130355	4¼" w x 11¾" d x 4" h	<b>\$1.29</b>
G0997315	G2600561	6¼" w x 11¾" d x 4" h	<b>\$1.89</b>
G1863084	G2268734	6¼" w x 17¾" d x 4" h	<b>\$2.59</b>

**AKRO-MILS  
Bin Dividers**

Side-to-side dividers are constructed of industrial-grade polymer and for use with Akro-Mils Shelf Bins.



G1168657	for 4¾" wide bins	24-pack	<b>\$7.29</b>
G2878084	for 6¾" wide bins	24-pack	<b>\$8.79</b>



**AKRO-MILS  
Bin Cups**

Plastic bin cups are constructed of industrial-grade polymer and for use with Akro-Mils Shelf Bins.

G3142842	2" w x 3¼" d x 3" h	<b>\$0.36</b>
G1950821	5" w x 2¾" d x 3" h	<b>\$0.67</b>

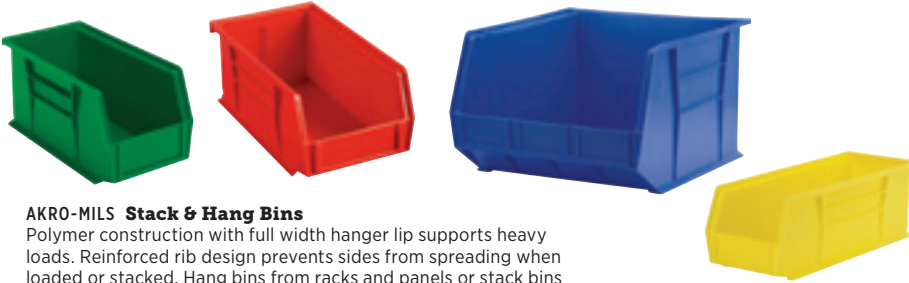

**AKRO-MILS Stack & Hang Bins**

Polymer construction with full width hanger lip supports heavy loads. Reinforced rib design prevents sides from spreading when loaded or stacked. Hang bins from racks and panels or stack bins on each other. Bins have slot on front panel for inventory cards or large labels. Black plastic dividers and clear lids are sold separately.

- ▶ MORE SIZES AND COLORS ONLINE

blue	red	yellow	green	description	price
G2068762	G0488266	G1299943	G1929295	4¾" w x 5¾" d x 3" h	<b>\$0.79</b>
G3118674	G1026347	G0441025	G3445906	4¾" w x 7¾" d x 3" h	<b>\$1.29</b>
G1873295	G2568011	G2713794	G2198804	5½" w x 10¾" d x 5" h	<b>\$3.59</b>
G2297522	G2828944	G2015544	G1786556	5½" w x 14¾" d x 5" h	<b>\$4.99</b>
G1123087	G2382405	G2430111	G2244961	8¼" w x 10¾" d x 7" h	<b>\$6.49</b>
G2515545	G3328656	G2394734	G0291575	8¼" w x 14¾" d x 7" h	<b>\$6.99</b>
G1575253	G1735386	G2193021	G1689956	16½" w x 14¾" d x 7" h	<b>\$9.19</b>



**AKRO-MILS Louvered Steel Panel**

Versatile panels can be installed on shelving, workbenches, walls or even inside service vans—mounting hardware NOT included. 16-gauge steel construction with gray powder-coated finish. For use with Akro-Mils Stack and Hang Bins—NOT included. 160lb load capacity. Panel measures 18" wide and 19" high.

G2731705	<b>\$18.18</b>
----------	----------------



**AKRO-MILS  
Recycled Stack & Hang Bins**

Bins are made from 100% recycled industrial-grade polymers. Bins can be used with Akro-Mils panel and rail hanging systems. Sandstone. ▶ MORE ONLINE

100% RECYCLED CONTENT		
G0527317	4¾" w x 5¾" d x 3" h	<b>\$0.79</b>
G3490313	4¾" w x 7¾" d x 3" h	<b>\$1.19</b>
G0870974	5½" w x 10¾" d x 5" h	<b>\$2.99</b>
G1613534	8¼" w x 14¾" d x 7" h	<b>\$5.49</b>
G2756932	16½" w x 14¾" d x 7" h	<b>\$8.49</b>

**AKRO-MILS Bin Hanging System**

Rail hanging system is ideal for creating stationary storage islands. Double-sided unit can be picked from both sides. 16-gauge steel construction with gray powder-coated finish. 500lb load capacity. 36" w x 20" d x 53" h. For use with Akro-Mils Stack and Hang Bins—NOT included.

G0786947	<b>\$140.37</b>
----------	-----------------

**AKRO-MILS Mobile Kit**

Mobile kit converts floor rack into mobile storage center. G2804304 kit **\$63.95**  
kit includes: steel reinforcing braces, handle, 4" polyolefin wheel casters



bins NOT included





**AKRO-MILS Shipping Containers**

Industrial-grade polymer containers feature attached lid and textured bottom. Protects contents during shipping and storage.

gray	blue	dimensions	price
G2370063	G0851286	15" w x 21½" d x 9" h	<b>\$15.99</b>
G2468627	G0555405	15" w x 21½" d x 12½" h	<b>\$16.99</b>
G3123477	G1357912	15" w x 21½" d x 17" h	<b>\$19.79</b>



**RUBBERMAID Brute Storage Container**

Reinforced ribbed bottom allows container to be dragged. Holes in easy-access handles allow water to drain. Containers stack securely. Heavy-duty polypropylene construction. 20 gal capacity. 17¾" w x 27¾" d x 15½" h.

■ NSF STANDARDS ► MORE ONLINE  
G1835574 **\$19.99**



**SUNCAST Stack Tote Bins**


Polypropylene bins include a secure latching lid. 75 lb load capacity.

G2325346	26 gal (19¾" w x 31½" d x 15½" h)	<b>\$21.99</b>
G0818282	32 gal (19¾" w x 31½" d x 19¾" h)	<b>\$27.99</b>
G2525302	50 gal (23½" w x 39½" d x 20½" h)	<b>\$39.99</b>

**AKRO-MILS Plastic Storage Cabinets**

High-impact polystyrene frame features strong see-through drawers that can be labeled. Rear drawer-stop table help prevent accidental spills. Removable dividers are molded into back of cabinet. Cabinets stack securely and are wall mountable.

G4184975	16 drawers (10⅞" w x 6⅞" d x 8½" h)	<b>\$11.16</b>
G3904661	24 drawers (20" w x 6⅞" d x 15⅜⅞" h)	<b>\$23.78</b>
G0353123	26 drawers (20" w x 6⅞" d x 10½" h)	<b>\$16.26</b>
G3917934	44 drawers (20" w x 6⅞" d x 15⅜⅞" h)	<b>\$26.92</b>
G2213477	64 drawers (20" w x 6⅞" d x 15⅜⅞" h)	<b>\$23.66</b>

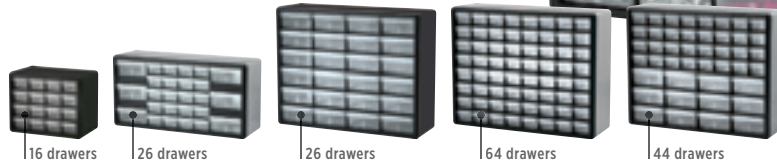


**DURHAM Pigeonhole Bin Cabinets**

Modular bin cabinets of the same width and depth can be stacked for increased storage capacity. Fully-welded, prime cold-rolled steel construction with gray powder-coated finish. ► MORE SIZES ONLINE

**Pigeonhole Bin Cabinets**

Slope bin front allows for easier removal of parts. Each bin comes with two sets of plasticized, pressure-sensitive labels for identifying contents.

Q#	bins	cabinet dimensions	bin dimensions	price
G2442754	12	33¾" w x 12" d x 23¾" h	8" w x 11½" d x 6¾" h	<b>\$63.85</b>
G3492885	24	33¾" w x 12" d x 23¾" h	5" w x 11½" d x 5½" h	<b>\$65.99</b>
G0979955	40	33¾" w x 12" d x 23¾" h	4" w x 11½" d x 4½" h	<b>\$85.98</b>
G1131295	42	33¾" w x 12" d x 42" h	5" w x 11½" d x 5½" h	<b>\$137.09</b>
G2136635	56	33¾" w x 12" d x 42" h	4" w x 11½" d x 5¾" h	<b>\$137.70</b>
G2498386	72	33¾" w x 12" d x 42" h	4" w x 11½" d x 4¾" h	<b>\$139.99</b>



**Pigeonhole Adjustable Bin Cabinet**


The five removable vertical dividers enable the creation of multiple width openings in 3¼" increments. Keyhole slots are for wall mounting. 23¾" w x 4¾" d x 23¾" h cabinet. 36 bins—4¾" w x 3¾" d x 3¾" h.

G2180342 **\$52.99**

**Base**

For use with 11" to 12" cabinets. 34¾" w x 12¼" d x 5¾" h.

G1155542 **\$46.19**



**RUBBERMAID Utility Tote Box**

Reinforced handles, bottom and ribs provide economical heavy load storage. Easy-to-clean, round-corner design is commercial dishwasher-safe. Polyethylene construction. 4.6 gal capacity. 15" w x 20" d x 5" h.

■ NSF STANDARDS  
► MORE SIZES ONLINE—LIDS ALSO AVAILABLE  
G0402516 **\$7.34**



**BWAY**

**Industrial Pail**

HDPE bucket features a screw top and carrying handle. For use with solids. 5 gal capacity. 12" diameter. 14½" height.

G3970775 pail **\$13.99**  
G4110522 lid **\$3.99**

lid sold separately



**EDSAL 132-Bin Storage Cabinet**

Cabinet features 4" deep "pocket doors" with hinges and leveling feet. Cabinets lock with padlock—NOT included. 16-gauge welded steel construction with gray powder-coated finish. 38" w x 24" d x 72" h. Cabinet ships assembled—bins, louvered panels and shelves shipped separately.

G0364201 **\$1357.75**



**AKRO-MILS Parts Storage Cabinets**

Transparent windows and label holder allow instant identification. Welded steel frame with extra-deep polystyrene drawers. Cabinets can be securely stacked. Each drawer includes dividers (2) and label (1). 17" w x 11" d x 11" h.

G3494513 9 drawers **\$75.99**  
G0281872 28 drawers **\$84.29**



**JUSTRITE Safety Storage Cabinets**

3-point self-latching system includes two keys and accommodates a padlock for added security. Shelves adjust on 3" centers and have built-in troughs to catch drips and lead to leakproof sump. Includes leveling feet and Haz-Alert reflective labeling for added safety. Manual door. Fully-welded, 18-gauge galvanized steel construction with yellow powder-coated finish.

■ OSHA, NFPA, FM STANDARDS

**12 Gallon Capacity**  
Includes one shelf.  
23 1/4" w x 18" d x 35" h.  
G1038545 **\$349.99**

**30 Gallon Capacity**  
Includes one shelf.  
43" w x 18" d x 44" h.  
G1912705 **\$499.99**

**45 Gallon Capacity**  
Includes two shelves.  
43" w x 18" d x 65" h.  
G0814721 **\$619.99**



**SUNCAST Outdoor Sheds**

Full-floor storage sheds with ramp-type front edge feature large panels for quick assembly. Durable resin construction is impact resistant and UV protected. Designed to accommodate additional shelving—available separately. Double-wide doors are lockable. Horizontal sheds have lockable lift-up top for easy access.



**Horizontal Storage Shed**  
20 cu-ft capacity.  
55 1/4" w x 30 1/4" d x 34 1/2" h.  
G2055724 **\$132.75**



**Horizontal Utility Shed**  
30 cu-ft capacity.  
56" w x 39 1/4" d x 39" h.  
G0772204 **\$219.70**



**Vertical Garden Shed**  
60 cu-ft capacity.  
56" w x 39 1/4" d x 72 3/4" h.  
G1264103 **\$319.99**

**DURHAM Sliding Drawer Parts Cabinets**

Prime cold-rolled steel construction with gray powder-coated finish. Cabinets hold 40lb per drawer. Cabinets can be stacked and bolted together. Steel parts are rust and acid resistant. ► MORE ONLINE

**4-Drawer Cabinet**

Drawers ride on sliding full-suspension slides fixed within the cabinet and can be easily removed. Holds four drawers—each with a hinged steel top, steel pull handle, closure latch and molded polypropylene tray. 180 lb load capacity. 20" w x 15 1/4" d x 15" h.




G2766127 **\$161.69**

**Cabinet Only**

Drawer stops prevent unintentional pull-out. Cabinets are available empty allowing users to chose any drawer configuration. Holds four drawers—NOT included. 20 1/4" w x 12 1/2" d x 15" h.

G2654994 **\$76.99**

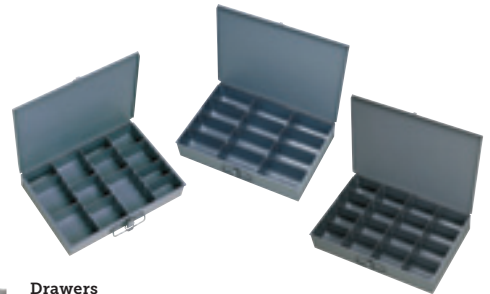

**Drawers**

Adjustable compartments include plastic dividers that can be removed or rearranged.

G2832417 12 compartments **\$21.99**  
G2051542 16 compartments **\$18.99**  
G2321925 9 vert adjustable compartments **\$20.92**

**SUNCAST Stacking Drawers and Tower**

Impact-resistant polypropylene is UV protected. Maintenance-free units will not rust, chip or peel. Roller guides provide easy open/close for removable drawers. Drawers measure 14 1/2" wide and 15" deep. Includes latch for secure closure.

**Stacking Drawers**

Drawers can be stacked interchangeably in any desired combination.

G2234574 6" height 4-count **\$74.60**  
G1358366 15" height 2-count **\$46.62**

**Stacking Drawer Tower**

18" w x 18" d x 36" h. Includes casters (4).

G1399395 **\$55.98**



**SUNCAST Utility Storage Cabinets**

Impact-resistant polypropylene is UV protected. Maintenance-free units will not rust, chip or peel. All cabinets are wall-mountable. Lockable doors and adjustable shelves.



**1-Shelf Wall Cabinet**  
50 lb capacity per shelf.  
28" w x 11 1/2" d x 28" h.  
G3348956 **\$57.55**



**2-Shelf Base Cabinet**  
75 lb capacity per shelf.  
30" w x 20 1/4" d x 36 3/8" h.  
G1023687 **\$70.88**



**3-Drawer Base Cabinet**  
14 lb capacity per drawer.  
30" w x 20 1/4" d x 36 3/8" h.  
G0328447 **\$95.99**



**4-Shelf Base Cabinet**  
75 lb capacity per shelf.  
30" w x 20 1/4" d x 72 3/8" h.  
G2101617 **\$127.99**



MORE THAN 400,000 ITEMS ONLINE



**VALUE BRAND Storage Cabinet**

Boltless 24-gauge steel storage cabinet features reinforced doors with nylon lock bar guides. Open 180° for full access to contents. Fully enclosed base protects doors from damage. Interlocking panels allow cabinets to be assembled in minutes without nuts or bolts. Shelves are adjustable in 2" increments. Cabinet features a 3-point locking system with keyed chrome handle and includes keys (2). Each of the four shelves can hold up to 150 pounds. Gray powder-coated finish. 36" w x 18" d x 72" h.  
**G2608146 \$208.99**

**EDSAL Bulk Storage Racks**

Racks are constructed of 16-gauge steel with a gray powder-coated finish and particleboard decking. Units feature a welded foot plate for floor mounting and three shelf levels adjustable in 3" increments. 1,500 lb shelf capacity.

- Starter**  
**G1199466** 60" w x 18" d x 72" h **\$154.99**  
**G1001576** 60" w x 24" d x 72" h **\$169.99**  
**G0944526** 60" w x 36" d x 72" h **\$179.99**
- Add-On**  
**G0330872** 60" w x 18" d x 72" h **\$128.99**  
**G2638955** 60" w x 24" d x 72" h **\$135.49**  
**G0430105** 60" w x 36" d x 72" h **\$149.99**



**VALUE BRAND Boltless Industrial Workbenches**

Tough and sturdy benches feature formed steel posts, braces, beams, shelf supports and drawer components. Work surface is constructed of medium-density fiberboard. Features include a pegboard tool organizer, smooth-closing drawer on ball-bearing slides and a tray-style top shelf. Large lower shelf provides additional storage. 1000 lb load rating. Hardware included. Ships unassembled.

- G0485317** 48" w x 24" d x 60" h **\$180.59**  
**G0497831** 60" w x 24" d x 60" h **\$210.49**  
**G2065716** 60" w x 30" d x 60" h **\$262.99**  
**G0771145** 72" w x 24" d x 60" h **\$302.99**  
**G2681095** 72" w x 30" d x 60" h **\$329.99**

**VALUE BRAND Industrial Wire Shelving and Accessories**

Shelves snap into place for easy set-up and repositioning. Shelves adjust in 1" increments. Tapered split-sleeve securely locks shelf to post. Raised shelf edges prevent rolloff. Posts include levelers to adapt to uneven flooring. 800 lb shelf capacity (24", 36", 48" widths). 600 lb shelf capacity (60" width). Steel construction with bright chrome finish that resists rust and corrosion and is ideal for high-visibility areas.



**Wire Shelving**

Shelving includes shelves (4) and posts (4).  
 ■ NSF STANDARDS ▶ MORE SIZES ONLINE

- G3107036** 24" w x 18" d x 63" h **\$73.74**  
**G1354421** 24" w x 24" d x 63" h **\$87.15**  
**G3350286** 36" w x 18" d x 63" h **\$78.19**  
**G2510995** 36" w x 24" d x 63" h **\$91.80**  
**G1936453** 48" w x 18" d x 63" h **\$89.79**  
**G2916733** 48" w x 24" d x 63" h **\$108.31**  
**G1513391** 60" w x 18" d x 63" h **\$102.97**  
**G3332542** 60" w x 24" d x 63" h **\$124.80**  
**G1661852** 24" w x 24" d x 74" h **\$113.39**  
**G3235172** 36" w x 24" d x 74" h **\$118.37**  
**G1530864** 48" w x 24" d x 74" h **\$133.19**  
**G0422624** 60" w x 24" d x 74" h **\$150.82**

**Swivel Casters**

5" rubber casters with polished zinc frame. ■ NSF STANDARDS

- G3176451** standard **\$12.49**  
**G1286871** cam brake **\$15.49**



**Shelf Liners**

Clear matte plastic.  
 ▶ MORE SIZES AND COLORS ONLINE

- G3396233** 24" x 18" 4-pack **\$8.85**  
**G2168406** 24" x 24" 4-pack **\$10.93**  
**G2320701** 36" x 18" 4-pack **\$10.58**  
**G0845022** 36" x 24" 4-pack **\$13.19**  
**G0613891** 48" x 18" 4-pack **\$12.39**  
**G3319111** 48" x 24" 4-pack **\$15.63**  
**G1672352** 60" x 18" 4-pack **\$14.24**  
**G2845333** 60" x 24" 4-pack **\$18.06**

**EDSAL Storage Cabinet**

Quick-assembly cabinet features 24-gauge steel construction. 3-point locking system with locking handle. Each of the four shelves can hold up to 175 pounds. 48" w x 24" d x 78" h.  
**G1779522 \$299.99**

**VALUE BRAND Boltless Storage Rack**

Modular boltless shelving features 16-gauge steel Z-shaped beams for added strength. Five shelf levels adjust in 1½" increments. Durable particleboard shelves provide a smooth, solid surface. Double-ripped beams lock into heavy-duty corner posts to form structurally secure joint. Units assemble vertically or horizontally. 1,800 lb shelf capacity (36" width). 1,400 lb shelf capacity (48" width). Baked enamel gray steel finish. Ships unassembled.

- ▶ MORE SIZES ONLINE  
 G0803232 36" w x 24" d x 72" h **\$108.83**  
 G0748203 48" w x 24" d x 72" h **\$125.98**



**PLANO MOLDING Interlocking Shelving**

Durable, lightweight polypropylene shelving will not rust or peel and is chemical resistant. Interlocking shelves connect multiple units for added storage. Snap-Fit assembly means no tools required. Ventilated open-style shelves are adjustable in 1½" increments. May be wall-mounted for extra strength and stability. 150 lb shelf capacity (18¼" depth). 200 lb shelf capacity (24¼" depth).

- G0549552 37" w x 18¼" d x 71½" h **\$56.99**  
 G1843414 37" w x 24¼" d x 71½" h **\$69.99**




**EDSAL Slotted Angle and Accessories**  
 Rust-resistant, galvanized steel bolts together to make custom steel shelving, racks, platforms, carts and more.

**14-Gauge Slotted Angle Post Kit**  
 Posts measure 2¼" w x 1½" d x 12' h.  
 G2195803 kit **\$99.99**  
 kit includes: slotted angle posts (5), ⅝" x ¾" cadmium-plated bolts and nuts (36)

**12-Gauge Slotted Angle Post Kit**  
 Posts measure 3" w x 1½" d x 12' h.  
 G2624745 kit **\$109.99**  
 kit includes: slotted angle posts (5), ⅝" x ¾" cadmium-plated bolts and nuts (38)

**Cleat and Gusset Kit**  
 G2450235 kit **\$18.55**  
 kit includes: 12-gauge 2¼" x 1½" x 9" cleats (6), 14-gauge 6" x 6" x 8" gussets (6)



**RUBBERMAID Structural Foam Stock Tanks**  
 Seamless black high-density structural foam tanks hold liquids and granular materials without leaking. Structural foam is durable in all kinds of weather. Includes oversized 1½" drain opening ideal for quick, easy drainage.

- Stock Tanks**  
 G1669656 50 gal (31" w x 52" d x 12" h) **\$61.99**  
 G0299065 70 gal (32" w x 40½" d x 24" h) **\$80.03**  
 G0760261 100 gal (31" w x 53" d x 25" h) **\$84.52**  
 G3125175 150 gal (39" w x 58" d x 25" h) **\$156.80**  
 G1373872 300 gal (69" w x 63¼" d x 25" h) **\$229.99**

- Replacement Drain Plug Kit**  
 G2501073 **\$18.35**



**JUSTRITE Oily Waste Cans**

Durable, chemical-resistant construction provides extended service life. Hands-free, foot-operated lid opens to a restricted angle and is self-closing to minimize the risk of spontaneous combustion. Galvanized steel construction with a red powder-coated finish.  
 ■ OSHA, UL, FM STANDARDS ▶ MORE ONLINE

- G0318105 6 gal (11½" dia x 15½" h) **\$48.05**  
 G3440832 10 gal (13½" dia x 18¼" h) **\$49.85**  
 G1572611 21 gal (18" dia x 23½" h) **\$82.35**

**BRIGGS & STRATTON Fuel Containers**

Fuel containers provide temporary storage of flammable liquids. Child-resistant fuel cans are self-venting and feature an auto shutoff spout. Angled and tapered container prevents spills, leaks and reduces gas emissions.  
 ■ CARB, ATSM STANDARDS



**Polyethylene**

Polyethylene cans are impervious to many liquid chemicals, solvents and corrosives. 5 gal capacity. 8½" w x 15" d x 14¾" h.

- G3400555 gasoline (red) **\$14.99**  
 G3324815 diesel (yellow) **\$15.99**  
 G0805472 kerosene (blue) **\$16.99**



**Galvanized Steel**  
 Galvanized steel cans are chemical resistant. 5 gal capacity. 6¾" w x 14" d x 19" h. Gasoline (red).  
 G2914624 **\$46.29**

**Replacement Spout**  
 G2863971 **\$5.49**



MORE SAFETY ITEMS ON PAGE 17

G2804277



**WERNER 6200 Series Single-Sided Stepladders**

The 6200 Series is ideal for the homeowner or the professional. Molded top secures tools from falling while keeping them right at hand. The ladder offers a full set of rear horizontals and heavy duty internal spreaders. All steps are knee braced. Fiberglass rails are non-conductive for working near electricity. 300lb duty rating. 3" step width. ■ ANSI STANDARDS

- G2122644 4' (3 steps) **\$60.48**
- G0422581 5' (4 steps) **\$70.72**
- G3168137 6' (5 steps) **\$79.25**
- G0455271 7' (6 steps) **\$105.36**
- G1694831 8' (7 steps) **\$101.99**
- G2391444 10' (9 steps) **\$198.75**
- G1632601 12' (11 steps) **\$221.57**



**WERNER Work Platform**

Portable work platform has a large standing area for working from side to side. Works great for along walls and windows. Features a nonskid surface with slip-resistant rubber feet protects floors. Easily sets up and folds for storage. 225lb load capacity. Aluminum construction. 15" x 41" base. 39½" w x 12" d x 20¾" h. ■ ANSI, OSHA STANDARDS  
G3223297 **\$46.19**

**LOUISVILLE AS2100 Series Stepladders**

Aluminum ladder features antislip treads, pinch-resistant spreader braces, wide back braces and slip-resistant shoes. Structural molded ProTop features tool slots and magnetic tray. 250 lb capacity. ■ ANSI, OSHA STANDARDS

- G3076141 4' (4 steps) **\$44.52**
- G0959497 6' (6 steps) **\$55.62**
- G1458405 8' (8 steps) **\$89.84**
- G0645312 10' (10 steps) **\$138.79**



**WERNER 150B Series Step Stool**

Step stool features a large molded top that provides a large standing platform and a duty rating of 300 pounds. Ideal for construction, plant, office or home applications. Aluminum construction. 2' height. 17" bottom width. 19" base spread. G3372117 **\$34.99**



**HAILO Steel Step Stool**

Three-step design features 11¾" wide platforms with nonslip mats double as ergonomic knee rests for extra support. Stool features multifunction tray with side-mounted magnets, ultra-high safety rails and nonslip plastic feet. Steel construction. 330 lb load capacity. 27¼" top step height. 4'4" height. G2166062 **\$49.99**



**WERNER ULTRA PRO 400 Series Stepladders**

Aluminum ladder features antislip treads, knee braced slip-resistant steps and Tool-Tra-Top with drill holster for added convenience. ■ ANSI STANDARDS

- G3495195 4' (3 steps) **\$120.91**
- G1422635 6' (5 steps) **\$152.99**
- G1342871 8' (7 steps) **\$219.99**
- G0379802 12' (11 steps) **\$321.23**
- G2388041 14' (13 steps) **\$391.64**
- G2922166 16' (15 steps) **\$493.49**



**VALUE BRAND Step Stands**

Plastic two-step stool holds up to 300 pounds. 16¼" diameter. 15" height.

- G4772905 black
- G4770333 red
- each **\$44.77**


**VALUE BRAND Step Stand**

Lightweight, rustproof polyethylene stands are durable and easy to move. Steps feature a nonskid surface. Includes rubber feet (4). 500 lb load capacity. 20¾" w x 24½" d x 19½" h. ► MORE ONLINE  
G4775732 **\$130.92**



**HAILO Aluminum Step Stool**

Three-step design features aluminum rails, hinged safety locking mechanism and large 11¾" wide steel steps covered with nonslip mats. Stepladders feature. Folds to 1.96" for easy storage. 330 lb load capacity. 27¼" top step height. 3'5" height. G1691776 **\$58.85**

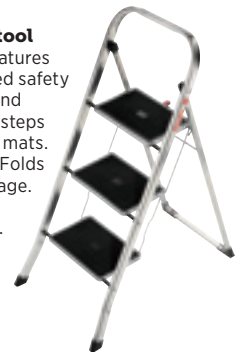

**LOUISVILLE FM1400HD Series Twin Stepladders**

Fiberglass ladder features Da Boot oversized rail protective shoes, bracing on each step, inside spreader bars, heavy-gauge top hinges, aluminum top, Shox impact absorption bracing and antislip treads. 375 lb capacity. ■ ANSI STANDARDS

- G3429684 4' (4 steps) **\$123.27**
- G2459502 6' (6 steps) **\$162.24**
- G1087572 8' (8 steps) **\$245.57**
- G1326665 10' (10 steps) **\$311.73**
- G2281797 12' (12 steps) **\$378.99**
- G0973463 14' (14 steps) **\$469.99**
- G0265124 16' (16 steps) **\$528.09**



**BALLYMORE Rolling Ladders**

Folding ladder stands combine the utility of a mobile rolling ladder with the storage convenience of a folding ladder. 350 lb load rating. 16" x 7" platform with perforated treads. Steel construction with a powder-coated finish. Includes handrails, rubber tips, non-including thermoplastic rubber wheels (4). ■ ANSI, OSHA STANDARDS

- 2-Step**  
20" platform height.  
42" overall height.  
24" x 17" base.  
G3983594 **\$135.99**
- 3-Step**  
30" platform height.  
52" overall height.  
24" x 23" base.  
G3901021 **\$178.79**



**WERNER  
2000 Series  
One-Person  
Scaffolding Stages**

Aluminum stages are ideal for ladder jack applications, swing stages or catwalks. Twist-Proof design features a double end rung for extra rigidity on stages 20' or longer. Vinyl-coated end caps. 250 lb load capacity. ■ ANSI, OSHA STANDARDS


- G0379741 12'w x 12"d x 4"h **\$141.41**
- G1746044 16'w x 12"d x 4"h **\$219.99**
- G3402515 24'w x 12"d x 5"h **\$339.99**



**WERNER  
PA200 Series  
Extension Planks**

Made of 2" deep box section extrusions for outstanding rigidity in ladder jack, trestle ladder and step stool applications. Locking mechanism sets the plank in 12" increments—positive stops prevent overextending. 250 lb load capacity. 14" depth. ■ ANSI, OSHA STANDARDS

- G1000492 6' to 9' **\$137.72**
- G2658293 8' to 13' **\$175.99**

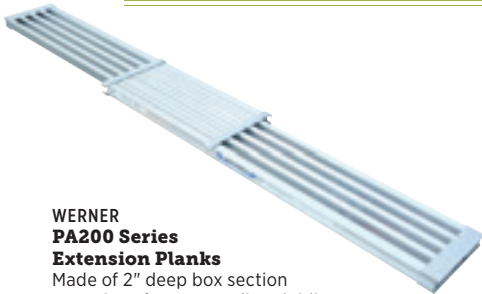

**LOUISVILLE  
Big Boy Attic Ladder**

Wooden attic ladder for 7' to 8'9" ceilings. 71" swing clearance. 60 2/3" landing space. 22" x 5 1/2" steps. 350 lb capacity. ■ ANSI STANDARDS

- G4966507 **\$169.99**



**LOUISVILLE  
Elite Attic Ladders**

Aluminum attic ladder for 7' to 9'10" ceilings. 79" swing clearance. 68 1/2" landing space. 350 lb capacity. ■ ANSI STANDARDS


- G4966482 13" steps **\$178.99**
- G4966491 17" steps **\$185.99**



**WERNER  
Extension Ladder Covers**

Extension ladder covers protect surfaces from dents and scratches. Fits most extension ladders. Rubber construction.

- G3208721 2-pack **\$5.95**



**SPEED DROPS  
Ladder Foot Covers**

Ladder foot covers protect floors with no-slip soles for added safety. 6" length.

- G0676401 2-pack **\$6.65**



**WERNER  
QuickClick Stabilizer**

Stabilizer steadies ladder while protecting the work surface. Installs and removes quickly without tools. For use with extension ladders. Paint can hook included. Aluminum construction. 44" span.

- G2320482 **\$41.66**



**WERNER LevelLok  
Ladder Leveler**

Levels ladder on uneven surfaces—adjusts up to 8 1/2". Leveler can be used on either side of the ladder and features a swivel shoe with ice pick on both ends. Includes mounting hardware and instructions. Aluminum construction. For use with Werner extension ladders only. ■ ANSI, OSHA STANDARDS

- G0968703 **\$102.82**



**WERNER  
Van Ladder Carrier**

Steel van rack fits conventional vans with drip rails and has a load capacity of 600 pounds. Easy to install with minimal tools and comes with silicone sealant to protect against rust. Includes predrilled uprights, cargo positioners and vinyl strips help to protect cargo while in transit. ■ ANSI STANDARDS

- G3336496 **\$85.53**



**LOUISVILLE Extension Ladders**

Extra heavy-duty ladder features fiberglass construction and steel swivel safety shoes. 300 lb load capacity. 17 1/16" outside shoe base width. ■ ANSI STANDARDS

- G1054006 10' to 20' (17' working) **\$169.99**
- G1679307 12' to 24' (21' working) **\$229.99**
- G0503106 14' to 28' (25' working) **\$219.99**



**LADDER LOCK  
Ladder Lock**

Safety tool attaches extension ladder to the roof, preventing it from sliding or blowing off the edge. Secures to many surfaces including gutters, plywood, drip edges, overhangs and wall cap flashing and tubing. Steel construction with trivalent coating. For use with extension ladders. ■ OSHA STANDARDS

- G4294762 **\$38.58**



**WERNER Ladder  
Jack Clamps**

Platform clamping system helps secure entire ladder jack system. Aluminum jack mounts on either side of extension ladder. 300 lb capacity. ■ ANSI, OSHA STANDARDS


- G0524797 2-pack **\$95.99**



**XTEND & CLIMB Specialty Extension Ladders**

Telescoping ladders open, close and lock by foot and can be opened from top or bottom. Angled thumb release mechanism ensures proper position. Nonslip beveled end caps. Closure strap and integrated carry handle. ■ ANSI STANDARDS

#	extended	ANSI	load	closed	price
G1824575	10 1/2'	Type II	225 lb	18" w x 2 3/4" d x 29" h	<b>\$249.99</b>
G2321182	12 1/2'	Type II	225 lb	18 1/2" w x 3" d x 34" h	<b>\$249.99</b>
G2183684	12 1/2'	Type IA	300 lb	19" w x 3" d x 34" h	<b>\$399.99</b>
G2510024	15 1/2'	Type I	250 lb	19 1/2" w x 3 1/2" d x 35 1/2" h	<b>\$459.99</b>





MORE THAN 400,000 ITEMS ONLINE

**VALUE BRAND Steel Drums**

Drums are constructed of carbon steel and have been treated with a mild rust inhibitor on the interior. For use with packing groups I, II and III of hazardous materials. ■ DOT, UN STANDARDS

► [MORE ONLINE](#)



**Open-Head Drums**

Covers are EPDM-gasketed with a bolt ring closure. Black with white cover.

Z#	capacity	load	dia	height	price
G1180891	10 gal	264 lb	14¼"	19"	<b>\$56.10</b>
G0946994	55 gal	957 lb	22½"	34½"	<b>\$78.39</b>

**Closed-Head Drums**

Drums come with 2" and ¾" steel plugs and flanges with Buna gaskets. Black with white cover.

Z#	capacity	load	dia	height	price
G1620026	10 gal	116 lb	14¼"	19¼"	<b>\$45.99</b>
G1877111	30 gal	374 lb	18¾"	29½"	<b>\$55.99</b>

**Salvage Drums**

Open drums are for transport of leaking or damaged containers. Covers are EPDM-gasketed and secured with lever lock ring closures. Yellow with red cover and multilingual "Salvage Drum" logo.

Z#	capacity	load	dia	height	price
G2444513	10 gal	264 lb	14¼"	19"	<b>\$59.30</b>
G0650291	20 gal	385 lb	19¼"	21½"	<b>\$73.73</b>



**AT-A-GLANCE Level Gauges**

Top-mount levels are for use with 55 gallon drums. Barrel level gauges read gallons, liters and 8ths of a tank (full to empty).

**Type B55**

Inner and outer plastic calibration unit. Duro nitrile gasket. Aluminum bushing. HDPE assembly nut. Galvanized steel rod. HDPE float.

G1588395	¾" NPT	<b>\$49.99</b>
G3385846	2" NPT	<b>\$32.99</b>

**Type B55 ALLSS**

All-stainless steel wetted materials for maximum compatibility with aggressive chemicals. Inner glass and outer plastic calibration unit. Viton gasket. 316 stainless bushing. Aluminum assembly nut. 316 stainless rod. Stainless steel float.

G1860284	2" NPT	<b>\$212.99</b>
----------	--------	-----------------



**EAGLE Drum Covers**

Rigid, dome-shaped snap-on design fits 55 gallon metal drums. HDPE construction resists most chemicals, acids and solvents.

G1661642	closed head (23" opening)	
G1911253	open head (24" opening)	

each **\$5.69**

**VALUE BRAND Drum Dolly**

Steel constructed dolly is for use with high-capacity loads. 55 gal drum capacity. 1,000 lb dolly capacity. 3" polyolefin casters. Includes bolts (16) and nuts (16). 23¼" inside diameter. 26⅞" outside diameter. 6½" height.

G2643697	<b>\$48.87</b>
----------	----------------



drum not included

**VALUE BRAND Salvage Drum Lifter**

Lifter places a 55-gallon steel drum into an 85-gallon steel or poly salvage/overpack drum using one moving part. Welded steel construction with industrial yellow finish. For use with closed steel drums. 1,000 lb load capacity. Ships assembled. 9"w x 24"d x 16"h.

G4301586	<b>\$95.87</b>
----------	----------------



**DAYTON Hand-Operated Drum Pump**

Rotary-action drum pump is commonly used for dispensing or transferring lubricating oils, fuel oils and antifreeze. This pump is self-priming and can pump up to 15 gpm at 135 rpm. 2" NPT bung adapter is designed to fit most 15, 30 and 55 gallon drums. Steel, cast iron and buna wetted materials. 1" FNPT inlet. 1¼" outlet. 14¼" discharge tube. 3-piece 40" suction tube.

G1223643	<b>\$120.77</b>
----------	-----------------

**VALUE BRAND Bollard Covers**

Slide-on bollard covers feature ¼" thick LDPE with a smooth yellow finish. Installation tape and instructions are included. 52" height. 10 lb net weight.

G4022627	4" post	
G4040127	6" post	

each **\$53.08**



**VALUE BRAND Bumper Post Sleeves**

Nonconductive, chemical-resistant sleeves slide over bollard posts and can be trimmed for an exact fit to reduce rusting, chipping, discoloration and painting. HDPE sleeve wall is approximately 3/16" thick with a ribbed design which provides extra impact protection. Fits 6" to 7" round beam. 56" height.

► [MORE SIZES ONLINE](#)

G1792804	yellow	
G1157877	red	

each **\$40.03**





**VALUE BRAND Manhole Guard Rail**  
Collapsible steel frame construction includes heavy-duty safety chains (2). 33" w x 33" d x 42" h open. 33" w x 43" d x 4" h collapsed.  
G4265012 **\$198.74**

### GUARD RAILS SYSTEM

Guard rails combine as a modular system that can be installed, removed or expanded. Features 11-gauge steel with an industrial yellow powder-coated finish. For outdoor and indoor use.

**VALUE BRAND Posts**  
In-line and corner configurations are available in two heights for single-row or double-row installation. Posts are made of 4" square steel tube with 1/4" thick walls and rounded corners. They are welded to a 10" square base plate that is 5/8" thick with rounded corners.

G0941613	center post (18 1/2" single height)	<b>\$80.39</b>
G2793375	corner post (18 1/2" single height)	<b>\$80.39</b>
G1005401	center post (42 1/2" double height)	<b>\$134.19</b>
G0980025	corner post (42 1/2" double height)	<b>\$134.19</b>

**VALUE BRAND Bolt-On Guard Rails**  
Impact-resistant, triple-ribbed corrugated design has no sharp edges or corners. Easy-to-assemble and install. Hardware, bolts, anchors, washers and nuts are included. 14 1/2" height.

▶ MORE ONLINE

G0784813	2'	<b>\$78.25</b>
G1347717	3'	<b>\$86.80</b>
G1612396	4'	<b>\$99.58</b>
G1161316	6'	<b>\$126.81</b>
G0767855	7'	<b>\$157.92</b>
G0253757	8'	<b>\$163.43</b>
G2223751	10'	<b>\$208.10</b>

double-row assembly      single-row assembly


**VALUE BRAND Rubber Dock Bumper**  
D-style extruded rubber bumper features two 3/8" mounting holes spaced 3" on center. 2" w x 2" d x 6" h.  
G4026093 **\$6.12**




**REESE Trailer Jack Wheel Chock**  
Molded rubber chock with 3" center hole is for use with trailer jacks with wheels. 1 1/2" height.  
G3305881 **\$5.37**



**VALUE BRAND Wheel Chock**  
Molded rubber resists tearing, abrasion and ozone weathering. Includes steel grab handle and eye bolt for use with chain or rope. 10" w x 8" d x 6" h.  
■ OSHA STANDARDS  
G1868553 **\$16.85**





**VALUE BRAND Wheel Chock**  
Molded urethane wheel chock is bright orange for greater visibility. Safety tread on chock face provides better grip and reduces slippage. Rubber pads grip pavement. Molded hole for attaching security chain—sold separately. 8" w x 11" d x 8" h.  
■ OSHA STANDARDS  
G2851667 **\$29.71**




**VALUE BRAND Steel Folding Gates**  
Steel folding gates feature 15-gauge U-channels riveted back-to-back and are equipped with self-securing center drop-in pin. 12-gauge steel vertical gate rails. Galvanized finish. Universal mounting on face or in casing. brackets, bearing washers, casters and lock lugs included. Padlocks NOT included.

Single					
Q #	opening	height	folded	price	
G3256705	3' to 4'	6'	8" x 6 1/2'	<b>\$87.43</b>	
G2285577	5' to 6'	6'	8 1/2" x 6 1/2'	<b>\$151.02</b>	
Double					
Q #	opening	height	folded	price	
G1624156	8' to 10'	6'	11 1/2" x 6 1/2'	<b>\$224.35</b>	
G3431863	10' to 12'	6'	13" x 6 1/2'	<b>\$259.52</b>	
G1237065	12' to 14'	7'	11 1/2" x 7 1/2'	<b>\$361.17</b>	

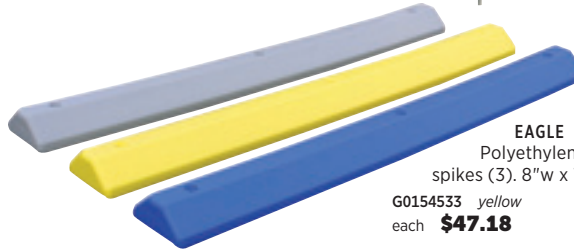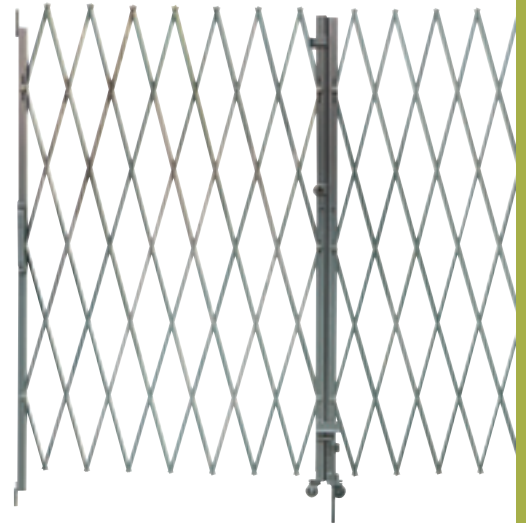

**EAGLE Parking Curbs**  
Polyethylene parking stop includes anchor spikes (3). 8" w x 72" d x 4" h.  
G0154533 yellow      G0154542 gray      G0154551 blue  
each **\$47.18**

**EAGLE Speed Bumps**  
Constructed of durable, lightweight HDPE, speed bumps are finished in a highly visible bright yellow. Flexible design fits the contour of road or factory floor. Can be used as a cable protector. Includes asphalt mounting kit with anchor spikes and asphalt adhesive.  
G2231311 6" w x 10" d x 2" h **\$58.69**  
G3353314 9" w x 10" d x 2" h **\$116.97**

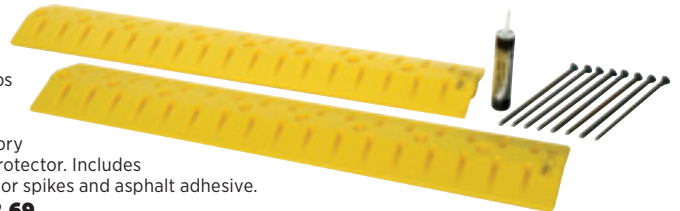



MORE THAN 400,000 ITEMS ONLINE



**RUBBERMAID Mobile Work Center**

Structural foam trade cart features perforated board sides to organize and store small parts and tools. Five lockable metal storage drawers of varying depths with plastic handles operate on steel suspension. Cabinets secure with locking bar. Molded-in handle allows for easy mobility. Built-in cord wrap. 4" lockable nonmarking casters—swivel (2) and rigid (2). 250lb load capacity. 32 $\frac{3}{8}$ "w x 19 $\frac{1}{16}$ "d x 33 $\frac{1}{2}$ "h. Ships assembled.

G1319586 **\$209.99**

tools not included



**RUBBERMAID Service Bench Utility Cart**

Structural foam trade cart includes four compartmentalized boxes with two side access trays. Built-in handle compartment provides extra storage. 6" nonmarking casters—locking swivel (2) and rigid (2). 330lb capacity. 19 $\frac{1}{4}$ "w x 38" d x 33 $\frac{5}{8}$ "h. Assembly required.

G1264155 **\$285.37**

**VALUE BRAND Folding Hand Truck**

Lightweight hand truck folds down to only 15 $\frac{1}{2}$ "w x 2 $\frac{1}{4}$ "d x 25"h. Aluminum frame with polypropylene components and 5" rubber wheels. 175lb load capacity. 15 $\frac{1}{2}$ "w x 16 $\frac{1}{4}$ "d x 39"h. Ships assembled and includes bungee.

G1193114 **\$57.93**



**RUBBERMAID Service Carts**

Heavy-duty structural foam construction features two shelves. 5" casters—swivel (2) and rigid (2). 500lb load capacity.

18" w x 39" d x 33" h  
G2001912 beige **\$167.02**  
G2559453 black **\$188.99**

26" w x 45" d x 33" h  
G1839397 black **\$167.99**



**RUBBERMAID Ergonomic Utility Cart**

Structural foam cart features an ergonomically designed handle. Easy-to-reach tool/accessory hooks and storage. Molded-in customizable fittings allow insertion of rods to hold wire spools and other materials on rolls. 2 $\frac{3}{4}$ " deep top shelf. 5" nonmarking casters—rigid (2) and swivel (2). 500lb capacity. 25 $\frac{1}{4}$ "w x 19" d x 39" h. Assembly required.

► **MORE ONLINE**  
G0470242 **\$163.70**

**METRO Heavy-Duty Wire Carts**

Featuring a nickel chrome finish, 1" adjustable increments and 5" rubber swivel casters with bumper guards. 600lb capacity.

G0970751 18" w x 36" d x 39" h **\$174.99**  
G0469962 24" w x 36" d x 39" h **\$194.99**  
G1345382 18" w x 48" d x 39" h **\$188.99**  
G0650343 24" w x 48" d x 39" h **\$259.99**



**VALUE BRAND Stock Cart**

Cart includes four 18-gauge steel shelves that can be evenly spaced 14" apart. Shelves can be inverted to form flush work surface. Gray powder-coated finish. 5" casters—swivel (2) and rigid (2). 800lb capacity. 24" w x 40" d x 60" h. Assembly required.

G2323255 **\$159.75**

**DAYTON Elevating Scissor Carts**

Portable ergonomic elevating carts help minimize worker bending and lifting. Materials can be loaded onto the platform, lowered to a safe transport height and raised to unload. Moves easily on four polyurethane casters, two swivel with brake and two rigid. All models feature a down speed control valve and hydraulic foot pump. Steel construction. ► **MORE ONLINE**

Z#	capacity	platform dimensions	adjustable height	elevation/stroke	price
G3406663	400 lb	27 $\frac{1}{2}$ " x 17 $\frac{5}{8}$ "	8 $\frac{3}{4}$ " to 29 $\frac{1}{4}$ "	1"	<b>\$521.24</b>
G2033701	800 lb	35 $\frac{1}{2}$ " x 20"	13 $\frac{1}{2}$ " to 51"	1 $\frac{3}{16}$ "	<b>\$1158.68</b>
G1107784	1,000 lb	63" x 31 $\frac{1}{2}$ "	12 $\frac{1}{4}$ " to 35 $\frac{1}{4}$ "	$\frac{1}{2}$ "	<b>\$1039.16</b>





lid sold separately

**RUBBERMAID Cube Trucks**

Standard-duty cube trucks are nestable for convenient storage. MDPE construction is easy to clean with a spray washer or steam. Casters are mounted in diamond pattern for greater maneuverability—rigid (2) and swivel (2). ■ USDA STANDARDS

► MORE ONLINE

**8 cu-ft Truck**

300 lb load capacity.  
26" w x 38" d x 28 1/2" h.

G0330933 truck **\$236.90**  
G2384672 lid **\$78.99**

**16 cu-ft Truck**

500 lb load capacity.  
30 1/2" w x 44 1/8" d x 37 1/8" h.

G2480353 truck **\$353.81**  
G0995531 lid **\$120.99**



**RUBBERMAID Tilt Trucks**

Trucks are easy to clean and will not rust, pit or dent. MDPE body is mounted on an all-welded steel frame. Inset rubber wheels enable trucks to be nested to save storage space. ► MORE SIZES ONLINE—LIDS ALSO AVAILABLE

Q#	truck	load	width	depth	height	price
G0609287	1/2 cu-yd	300 lb	28"	56 3/4"	38 3/4"	<b>\$382.78</b>
G1236304	1 cu-yd	600 lb	33 1/16"	73 3/4"	44 5/16"	<b>\$499.44</b>
G0540477	1 cu-yd	850 lb	33 1/16"	73 3/4"	44 5/16"	<b>\$347.49</b>
G1897506	1 cu-yd	2,100 lb	33 1/2"	72 1/4"	43 3/4"	<b>\$849.99</b>

**RUBBERMAID Dump Carts**

Built-in hand grips aid in dumping off-center loads. Positive locking latch and safety bail prevent accidental dumping. Structural foam construction with molded-in slots. Pneumatic tires. Assembly required.

**8 Cubic-Foot Cart**

750 lb load capacity.  
60" w x 39 1/4" d x 25" h.

G1480997 **\$164.98**

**15 Cubic-Foot Cart**

1,500 lb load capacity.  
76" w x 39 1/2" d x 33 3/4" h.

G1187505 **\$385.99**



**DAYTON Pallet Trucks**

Features overload bypass valve and a pressure compensated flow valve for controlled lowering. A 3-position hand-actuated control lever for selecting "raise," "neutral," and "lower" positions. Steel construction with reinforced fork bracing and sealed ball bearings on wheels. Polyurethane wheels and rollers. 48" x 6 1/16" fork. 2 7/8" lowered height. 7 3/4" raised height.

**Narrow**

Narrow fork design with entry glides and exit rollers allows easier access to smaller pallets with decks up to 24" wide. 20 1/2" across forks. 7 7/8" between forks.

G0438076 5,500 lb capacity **\$514.60**

**Standard**

27" across forks. 14 3/8" between forks.

G2640976 5,500 lb capacity **\$541.16**  
G1700194 6,000 lb capacity **\$614.62**



**ALBION Never-Flat Wheels**

Constructed of expanded closed-cell urethane foam. Ball wheel bearings.



**8" Wheel**

300 lb load rating. 2 1/2" ribbed tread. Offset steel hub fits 1/2" axle.

G1675475 **\$26.99**



**10" Wheel**

350 lb load rating. Offset steel hub fits 5/8" axle. 4" sawtooth tread.

G0914173 **\$49.99**

BICYCLE PARTS & ACCESSORIES

**WORKSMAN Bell**

Mechanical cycle bell for use with any bicycle.

G2786402 **\$8.94**



**WORKSMAN Safety Flag**

Safety flag includes bracket and pole for use on any bicycle.

G3143226 **\$8.17**



**WORKSMAN Bicycle Seats**

For use on bicycles with a 7/8" seat post.

G1486231 9" standard **\$23.06**

G1116762 13" extra wide **\$23.19**



**WORKSMAN Bicycle Wheel**

For use on bicycles with 26" x 2 1/8" coaster brake wheels. 11-gauge spokes.

G2493111 **\$100.08**

**WORKSMAN Bicycle Tube**

For use on bicycles or tricycles with 26" x 2 1/8" wheels. Puncture resistant.

G3042654 **\$10.99**



**WORKSMAN Tires**

For use on bicycles or tricycles.

G2300934 24" **\$18.50**

G2290425 26" **\$19.15**



**VALUE BRAND Casters**

Zinc-plated steel frame with 1 1/4" wide wheel and plain bore bearings. The 2 3/4" x 3 3/4" plate features 1 3/4" x 3" bolt hole spacing for use with 5/8" mounting bolts. Includes thread guards.

**Swivel Plate Casters**

Black polyolefin wheels with polyurethane core. Double-ball raceway.

Q# wheel height load price

G2792291 3" 4 1/2" 176 lb **\$5.99**

G1216722 4" 4 3/4" 198 lb **\$6.49**

G0867666 5" 5" 280 lb **\$7.99**



**Rigid Plate Casters**

Blue polyurethane wheels with polyurethane core are antistatic.

Q# wheel height load price

G1579627 3" 4 1/2" 176 lb **\$8.29**

G2477212 4" 4 3/4" 198 lb **\$8.49**

G3258561 5" 6 1/4" 220 lb **\$8.89**





**VALUE BRAND Screw-Pin Anchor Shackles**

Ideal for applications where the shackle is removed frequently. Galvanized, forged carbon steel body with alloy safety pin.



■ ASTM STANDARDS ► MORE ONLINE

Z#	load	between eyes	pin/bolt diameter	body	price
G1607191	650 lb	3/8"	3/4"	3/8"	<b>\$1.89</b>
G1256157	1,000 lb	1/2"	3/4"	3/8"	<b>\$1.99</b>
G1982723	1,500 lb	1/2"	3/4"	3/8"	<b>\$2.19</b>
G2531252	2,000 lb	23/32"	7/8"	3/8"	<b>\$2.89</b>
G0313722	3,000 lb	3/4"	1"	3/8"	<b>\$3.99</b>
G2947795	4,000 lb	13/16"	1 1/8"	3/8"	<b>\$3.49</b>
G2333807	6,500 lb	1 1/4"	1 1/2"	3/8"	<b>\$5.99</b>
G3172206	9,500 lb	1 3/4"	1 7/8"	3/8"	<b>\$7.99</b>

**VALUE BRAND Load-Rated Carabiner**


Features zinc-plated steel construction. 2" length. 3/16" eye diameter. 1/4" snap opening. 175 lb load (max). Not for lifting.



► MORE ONLINE  
G1942656 **\$0.97**

**DAYTON Wire Rope Sleeves**


Generate loops with a clean look. Aluminum alloy construction.



► MORE ONLINE  
G3453895 3/8" 25-pack **\$6.94**  
G3212571 1/2" 25-pack **\$13.50**  
G2715657 3/4" 25-pack **\$9.60**  
G1441526 1" 25-pack **\$20.67**

**VALUE BRAND Wire Rope Block**

Suitable for use with heavy-duty wire rope in high-load and medium-speed applications. Forged fittings with zinc finish are weather-resistant and riveted to all-steel sheave. Bronze bearings are self-lubricating. 3,000 lb working load limit. 4" sheave diameter. 3/8" cable (max).




► MORE ONLINE  
G2781545 **\$23.11**

**VALUE BRAND Pulleys**

Zinc pulley blocks can be mounted to the wall or ceiling. For use with 3/8" rope.



Z#	wheel	load	width	height	price
G0424076	1 1/2"	420 lb	2 3/32"	2 7/32"	<b>\$4.55</b>
G0938411	2"	480 lb	3 3/4"	2 1/2"	<b>\$5.73</b>

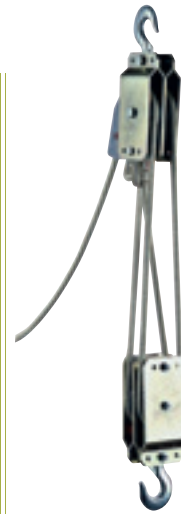


**TUF-TUG Block and Tackle**

Assists with light industrial lifting, pulling, positioning and stretching. Roller cam lock holds load in position. Zinc-plated with heat-treated, drop-forged steel latch hooks. 350 lb lifting capacity. 700 lb pull capacity. 12' reach capability. 3/8" hook opening.

G2738775 **\$38.99**

**DAYTON Ratchet Puller**

Features a large ratchet diameter with high tooth count and positive locking ratchet teeth. Heat-treated, drop-forged steel latch hooks are zinc-plated to resist corrosion. Puller includes galvanized aircraft cable, a self-aligning cable guide and three hooks for single- or double-line operation. Pulley hook assembly removes easily for single-line use on lighter loads. 1,000/2,000 lb lifting capacity. 2,000/4,000 lb pull capacity. 15' reach. 7/8" hook opening.

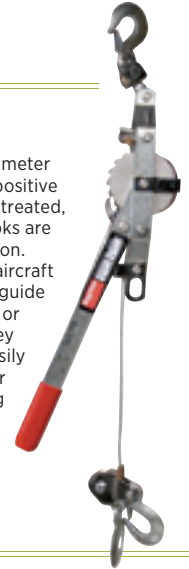

■ ASME STANDARDS  
G2297915 **\$91.42**



**LIFT-ALL Cargo Strap**

Ratchet strap features a steel mini-hand ratchet. Release mechanism allows webbing to be pulled through the ratchet. Attach to hand trucks, dollies, appliance movers and boats or use to secure tarp covers. 1" x 15' black polyester webbing. 700 lb working load limit. 2,100 lb breaking strength.

G2635857 **\$8.94**



**VALUE BRAND Tie-Down Strap**

Ratchet straps have a shaft constructed of alloy steel that keeps webbing from fraying. Release mechanism allows webbing to be pulled through the ratchet. 1" x 15' red polyester strap. 400 lb working load limit. 2,100 lb breaking strength.


G2534673 2-pack **\$12.63**

**TANIS Conveyor Brush**

Densely compressed bristles, held in place by a continuous metal-backed channel and binding wire, guide and position items on a conveyor belt. Brushes can be used for spray, mist, clean, dust and seal applications. Galvanized steel backing. Chemical-resistant. 3/4" x 7/32" backing. 3" crimped nylon trim. 72" length.



► MORE SIZES ONLINE  
G2944453 10-pack **\$12.64**

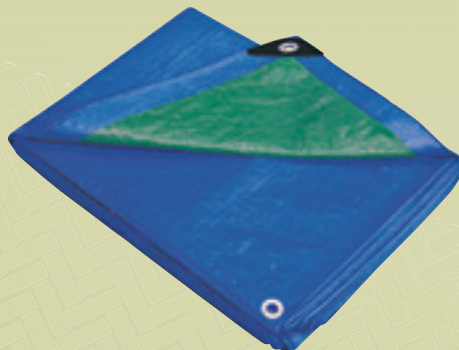

**VALUE BRAND Tarps**

Lightweight 3.5 oz/yd polyethylene construction features rustproof aluminum grommets approximately every 36". Seams are heat-sealed with polyethylene rope-lined hems. High-density 10 x 10 weave (1000 denier). Resists UV rays, mildew and tears. 5.1 mil thickness. Blue/green reversible. ► MORE SIZES AND COLORS ONLINE


G1235132	6' x 8'	<b>\$2.99</b>
G2311093	8' x 10'	<b>\$5.99</b>
G2968427	10' x 12'	<b>\$6.48</b>
G1883034	12' x 16'	<b>\$9.85</b>
G2473484	15' x 20'	<b>\$14.75</b>
G2679503	20' x 30'	<b>\$59.99</b>

**ASHLAND CONVEYOR**

**Conveyor Tripod Stand**

Supports straight or curved conveyor sections in position. It can be used with gravity skate wheels or light- and medium-duty roller conveyors. Jig-welded steel construction. 9 1/2" T-bar. 25" to 43" adjustable height. 400 lb capacity.

► MORE SIZES ONLINE  
G0785154 **\$47.99**

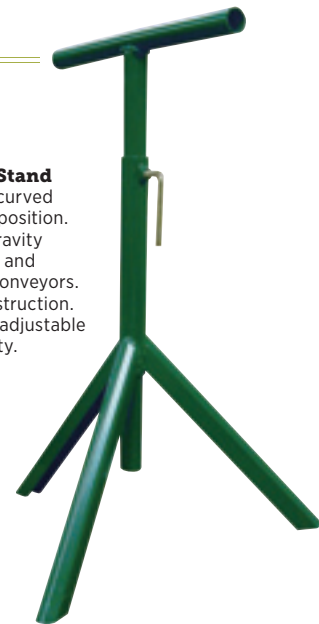

**CM Grade 100 Chain Sling Components**

Steel construction. 4,300 lb working load limit for 3/32" trade size. 8,800 lb working load limit for 1/8" trade size. 15,000 lb working load limit for 3/16" trade size. ■ OSHA, ASTM, NACM STANDARDS

▶ MORE ONLINE

**Chains**

10' forged alloy steel chains feature 12 straight links per foot and a black finish. Heat treated and 100% proof tested.

- G0331335 3/32" **\$69.99**
- G2725764 3/8" **\$89.99**
- G0535814 1/2" **\$179.99**



**Hammerlok Coupling Link**

- G1983177 3/32" **\$24.25**
- G2450043 3/8" **\$39.99**
- G3353323 1/2" **\$39.98**

**Clevis Grab Hook**

- G0581445 3/32" **\$18.97**
- G0422353 3/8" **\$29.99**
- G2521757 1/2" **\$61.21**



**Swivel Slip Hook**

- G1685442 3/32" **\$117.39**
- G0680653 3/8" **\$119.99**
- G1673472 1/2" **\$181.16**

**Sling ID Tag**

- G1429872 **\$1.99**



MORE HOISTS  
ON PAGE 115

G2505422

**DAYTON Mini Chain Hoist**

Offers 1-handed operation from any position. Free-chaining feature enables quick load attachment. Constructed of forged steel with a rubber grip. Upper and lower hooks include latches to secure loads. Features Weston-type load brake and single-stage reduction gearing. 6' hardened and plated alloy steel load chain. 500 lb load capacity. 5' lift. 1 3/16" hook opening.

■ ANSI, ASME STANDARDS

- G0630725 **\$120.52**



**COFFING LSB-B Series Lever Chain Hoist**

Lever-operated chain ratchet chain puller features 11' hardened steel chain, safety hook latches, 9 1/4" lever, dual-stage reduction gearing and friction brake. Screw- and disc-type brake provides positive load positioning. Easy-to-operate free-chain mode.

Short, cushioned handle rotates 360°. 1,650 lb load capacity. 10' lift. 1 1/16" hook opening.

■ ANSI, ASME STANDARDS

▶ MORE ONLINE

- G0491452 **\$272.88**



**CM Series 622 Hand Chain Hoist**

Portable compact design with low headroom. Two-stage gear reduction utilizes heat-treated hardened gears and operates in grease lubrication. Friction-reducing roller and ball bearings along with jamproof single-reeved load chain guide provide smooth operation. Hand chain hangs 2' shorter than lift. Hoist features forged swivel upper and lower hooks with safety latches and a Weston-type self-adjusting load brake. 1,000 lb load capacity. 10' lift. 1 1/16" hook opening.

■ ANSI, ASME STANDARDS

▶ MORE ONLINE

- G1100942 **\$99.99**




**LIFT-ALL Web Slings**

Heavy-duty endless slings feature Tuff-Edge construction with latex coating, red core yarn wear indicator and permanent identification tag. Resists UV sunlight, grease and most acids. Single ply. 3,200 lb vertical hitch capacity. 2,500 lb choker hitch capacity. 6,400 lb basket hitch capacity. 1" web width.

■ OSHA, ASME STANDARDS

- G0333812 4' **\$14.00**
- G3246451 6' **\$17.91**
- G1360256 8' **\$21.82**



**DAYTON Electric Winch**

Designed for multipurpose hauling and pulling operations. Winch is equipped with a permanent magnet AC motor, permanently lubricated/sealed gearbox, reversing switch, galvanized wire rope and forged hook. All-steel, high-speed winch features a prewired remote on 6' cable with cable tension plate. Single-phase planetary gear. For indoor use. 1/2 HP. 115 VAC. 10 A. 1,000 lb single line. 5/32" x 45' wire rope. 13 fpm (full load). 24 fpm (no load).

- G0624705 **\$389.48**



**DAYTON Wire Rope Slings**

Eye and eye slings are constructed of 6 x 19 IWRC class wire steel rope and feature a capacity tag. 1,300 lb vertical hitch capacity. 960 lb choker hitch capacity. 2,600 lb basket hitch capacity. 1/4" rope diameter.

- G0641076 2' **\$14.87**
- G1594993 3' **\$15.79**
- G1025114 4' **\$17.64**



**MAG-MATE PowerLift Rare Earth Lifting Magnet**

Can be used on flat or round surfaces for handling steel plates, billets, blocks and containers. Requires no electricity to operate. On/Off with locking system. RFID enabled. Neodymium magnet. 800 lb max (flat). 400 lb max (round). 3 5/8" w x 7 7/8" d x 3 3/8" h.

■ ASME STANDARDS ▶ MORE ONLINE

- G1792752 **\$537.27**



# TOOLS



NEED SCREWDRIVERS, CLAMPS, TAPE MEASURES OR DRILL BITS? ZORO HAS EVERYTHING YOU NEED **AND** MORE!

*"Man is a tool-using animal. Without tools he is nothing, with tools he is all."* —Thomas Carlyle.

Carlyle was on to something, wasn't he? With over **33,000** products, we have tools for every situation. Whether at work or home, for manufacturing or maintenance, common or specialty—we have the right tools for you. You can see for yourself by viewing our entire tool selection online. Need a tool to get the job done? Zoro can help!



**KNIVES**  
// page 103



**WRENCHES**  
// page 98, 99



**SOCKET SETS**  
// page 102



**TOOL BAGS**  
// page 104



**STORAGE LOCKERS**  
// page 105



**POWER TOOLS**  
// page 106

## POPULAR BRANDS

**RIDGID**

**STANLEY**

**BOSCH**

**CONTICO**

**CLC**  
Custom LeatherCraft

**LENOX**

**JOBBOX**  
PREMIUM STORAGE SOLUTIONS

**KLEIN TOOLS**

**Dayton**

**SK**

**IRWIN TOOLS**

**CRAFTSMAN**


**CHAN NEL LOCK**  
WORK HARD, SWEAT BLUE!

**PROTO**

more BRANDS online



**PLIERS**  
// page 99, 100



**LEVELS**  
// page 101



**TILE SAWS**  
// page 107

**PROTO Classic Slotted Screwdrivers**

Designed to meet demanding heavy-duty needs of industrial maintenance and assembly applications. Impact resistant, extruded acetate handles are four-sided with broad but shallow flutes. High-alloy steel shanks are heat treated their entire length to help provide strength against twisting action and to help prevent bending and twisting when placed under torque. Large round shanks include hex bolster for use with a wrench when added torque leverage is required.

■ ANSI STANDARDS ▶ MORE ONLINE

- G0624513 ¼" (6" shank, 10" overall) **\$6.99**
- G2001343 ⅜" (4" shank, 8⅜" overall) **\$9.99**
- G2886947 ⅝" (10" shank, 15" overall) **\$10.99**




12  
PIECE

**VALUE BRAND Combination Screwdriver Set**

Combination set features slotted, phillips and torx tips. Steel construction with a chrome finish. Screwdrivers have either hex or round shanks. Three-sided, double injection handle.

- G1844166 12-piece set \$33.84**  
set includes: slotted (⅜" x 3", ⅝" x 3", ⅝" x 6", ¾" x 1½", ¾" x 4", ⅝" x 6"), phillips (#0 x 3", #1 x 3", #2 x 4", #2 x 1½"), torx (T15 x 3", T20 x 4")

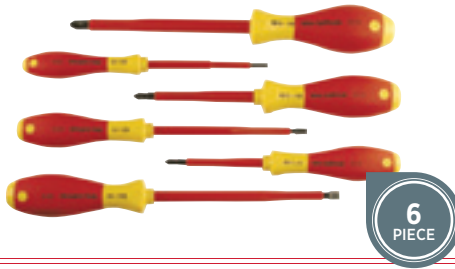

6  
PIECE

**WIHA TOOLS Screwdriver Set**

Molded-on insulation is intended for protection from accidental tool contact of up to 1000 volts. Ergonomically designed soft-finish molded cushion provides higher torque, more comfort and less hand fatigue. CVM formulated tool steel blade. 3" to 10" blade length. Round shank.

- G1780161 6-piece set \$33.60**  
set includes: slotted (⅝", ⅝", ¾"), phillips (#1, #2, #3)



7  
PIECE

**WERA Combination Screwdriver Set**

Combination set includes both phillips and slotted styles. Ergonomic two-component handles are constructed of plastic and elastomer.

- G1592543 7-piece set \$39.06**  
set includes: phillips (#1 x 80, #2 x 100), slotted (1.5 x 6.5 x 125, 1.6 x 9.0 x 150, 0.8 x 4.0 x 100, 0.8 x 4.0 x 150, 0.8 x 4.5 x 100)

**VALUE BRAND Precision Screwdriver Set**

Combination set features precision slotted, phillips and hex heads with stainless steel shafts and blades. 2½" round shanks. 3¾" drivers with color-coded swivel ends. Includes carrying case.

- G2983224 12-piece set \$25.96**  
set includes: slotted (1.5mm, 1.8mm, 2mm, 2.5mm, 3mm), phillips (#000, 00, 0), hex (⅜", ⅝", ⅝", ⅝")



12  
PIECE

**VALUE BRAND Precision Tool Set**

Tool set includes precision pliers and screwdrivers in a leather carrying case.

- G1177443 13-piece set \$47.99**  
set includes: pliers (long nose, diagonal cut, end nose, bent nose, needle nose), slotted screwdrivers (1.5mm, 1.8mm, 2mm, 2.5mm, 3.0mm), phillips screwdrivers (#000, #0, #0)



13  
PIECE

HAVE SCREWDRIVER.  
WILL TRAVEL.



**KLEIN TOOLS 10-in-1 Screwdriver/Nutdriver**  
Cushion-grip handle provides greater comfort. 7½" overall length.

- G2056966 \$11.17**  
screwdriver includes: phillips (#1 & #2), slotted (¾" & ⅝"), square (#1 & #2), torx (T10 & T15), nut drivers (⅜" & ¼")

**MEGAPRO Original Multi-Bit Screwdriver**

The Original 15-in-1 features a patented pull-out bit cartridge in handle loaded with 7 double-end professional quality bits. This assortment provides 14 popular tips for driving screws. The shaft opening serves as a ¼" hex driver. 8½" overall length.

- G1832302 \$16.79**  
screwdriver includes: phillips (#0 & #3, #1 & #2), square (#0 & #3, #1 & #2), star (T10 & T15, T20 & T25), slotted (#4 & #6), ¼" hex nut driver



**MEGAPRO Tamperproof Multi-Bit Screwdriver**

The 15-in-1 Tamperproof is ideal for commercial/industrial tradesmen—electricians, locksmiths, telephone technicians, maintenance personnel, etc. Screwdriver pull-out bit cartridge includes popular security bits. Shaft opening serves as a ¼" hex driver. 8½" overall length.

- G0620356 \$19.99**  
screwdriver includes: hex pin (⅜" & ⅝", ⅝" & ⅝"), spanner (#6 & #8, #10 & #12), star pin (T10 & T15, T20 & T25, T27 & T30), ¼" hex nut driver

**MEGAPRO Megalok Multi-Bit Screwdriver**

The 14-in-1 Megalok driver features a ¼" quick-change chuck that locks the bit into the driver. The locking quick-change chuck accepts all ¼" hex-shank power groove accessories. Handle features pull-out bit cartridge with 7 double-end bits. 6" overall length.

- G1980045 \$19.99**  
screwdriver includes: phillips (#0 & #3, #1 & #2), square (#0 & #3, #1 & #2), star (T10 & T15, T20 & T250), slotted (#4 & #6)







**VALUE BRAND Combination Wrench Sets**  
Wrench sets feature a 15° head angle.  
Satin finish. 12 point. Includes vinyl pouch.  
■ ANSI STANDARDS

**Metric**  
G0786992 17-piece set **\$49.18**  
set includes: 7mm, 8mm, 9mm, 10mm, 11mm, 12mm, 13mm, 14mm, 15mm, 16mm, 17mm, 18mm, 19mm, 21mm, 22mm, 24mm, 27mm

**SAE**  
G1301115 17-piece set **\$62.99**  
set includes: 3/8", 7/16", 1/2", 5/8", 3/4", 7/8", 1", 1 1/8", 1 1/4", 1 1/2", 1 3/4", 1 7/8", 2", 2 1/4", 2 1/2", 2 3/4", 3"




17  
PIECE

**VALUE BRAND Combination Wrench Set**  
SAE and Metric wrench set features a 15° head angle.  
Satin finish. 12 point. Includes case. ■ ANSI STANDARDS

G1585893 32-piece set **\$104.91**  
set includes: 3/8", 7/16", 1/2", 5/8", 3/4", 7/8", 1", 1 1/8", 1 1/4", 1 1/2", 1 3/4", 7mm, 8mm, 9mm, 10mm, 11mm, 12mm, 13mm, 14mm, 15mm, 16mm, 17mm, 18mm, 19mm, 21mm, 22mm, 24mm

32  
PIECE

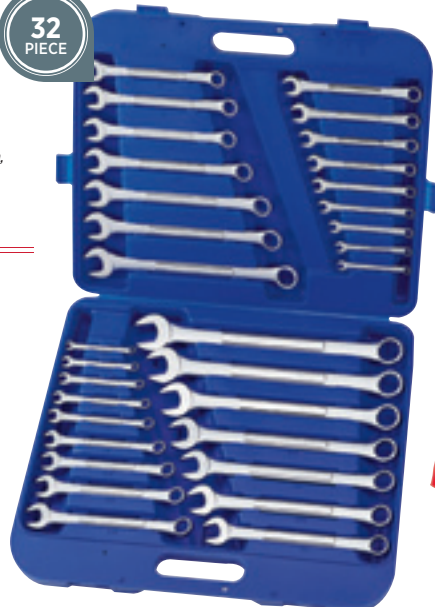

**PROTO Combination Wrench Set**  
Satin finish provides corrosion resistance and a slip resistant grip. 12-point box ends incorporate the TorquePlus system and allow for fine indexing, helping to improve speed and access—fits 4, 6 and 12 point fasteners. 15° head angle. Includes vinyl pouch. ■ ANSI STANDARDS

G3018906 15-piece set **\$249.99**  
set includes: 3/8", 7/16", 1/2", 5/8", 3/4", 7/8", 1", 1 1/8", 1 1/4", 1 1/2", 1 3/4", 1 7/8", 2"

15  
PIECE



10  
PIECE



**VALUE BRAND Crowfoot Wrench Set**  
Steel construction with chrome-plated finish allows for easy cleanup and prevents corrosion. 3/8" drive. SAE. Socket rail with socket clips (10). ■ ASME STANDARDS

G1259623 10-piece set **\$39.27**  
set includes: 3/8", 7/16", 1/2", 5/8", 3/4", 7/8", 1", 1 1/8", 1 1/4", 1 1/2"

2  
PIECE



**VALUE BRAND Adjustable Wrench Set**  
Drop-forged and heat-treated alloy steel construction with corrosion-resistant chrome finish. NiKlear multilayer plating and coating. Smooth-turning knurl allows for quick adjustments of the jaw opening. Cushion grip handle provides comfort. ■ ASME STANDARDS

G0342772 2-piece set **\$18.99**  
set includes: 8" (1 3/8" jaw capacity), 10" (1 3/8" jaw capacity)

3  
PIECE



**CRESCENT Adjustable Wrench Set**  
Drop-forged and heat treated alloy steel construction with chrome finish. Adjustable wide capacity jaw allows each tool to work with more fastener sizes. Plain-grip handle.

G2003416 3-piece set **\$54.49**  
set includes: 6" (1 3/8" jaw capacity), 8" (1 3/8" jaw capacity), 10" (1 3/8" jaw capacity)

3  
PIECE



**CRESCENT Adjustable Wrench Set**  
Drop-forged and heat treated alloy steel construction with chrome finish. Adjustable wide capacity jaw allows each tool to work with more fastener sizes. Cushion-grip handle.

G1680953 3-piece set **\$38.99**  
set includes: 6" (1 3/8" jaw capacity), 8" (1 3/8" jaw capacity), 10" (1 3/8" jaw capacity)

**STANLEY FatMax Long Nose Pliers**

Precision machined jaws are ideal for gripping, twisting and cutting. Slim head design allows access into tight spaces. Forged high-quality carbon steel provides a durable gripping and cutting edge. Serrated nose with side cutter. Ergonomic cushion grip handle. 6½" overall length. 7/64" tip. 5/8" x 2" jaw. ■ ANSI STANDARDS

G0318026 **\$10.13**




**STANLEY FatMax Diagonal Cutting Pliers**

Slim head design allows access into tight spaces. Forged high-quality carbon steel provides a durable cutting edge. Ergonomic cushion grip handle. 7½" overall length.

15/16" x 7/8" jaw. ■ ANSI STANDARDS

G2804627 **\$9.49**



**STANLEY FatMax Linesman Pliers**

High-leverage pivot design uses less energy to cut than traditional cutting pliers. Precision machined jaws ideal for gripping, twisting and cutting. Forged high-quality carbon steel provides a durable gripping and cutting edge. Universal nose with side cutter. Ergonomic cushion grip handle. 8½" overall length. ½" x 2" jaw.

■ ANSI STANDARDS

G0664806 **\$11.74**



15  
PIECE

**GREENLEE SlugBuster Punch and Die Set**  
Manual punch driver set punches up to 10-gauge mild steel. Includes plastic carrying case.

G1453986 15-piece set **\$288.31**  
set includes: 1" hex-head ratchet wrench, Slug-Buster conduit punches (3/8", 3/4", 1", 1¼", 1½", 2"), Slug-Buster dies (3/8", 3/4", 1", 1¼", 1½", 2"), draw studs (3/8", 3/4")


**STANLEY Punch and Cold Chisel Set**

Forged, one-piece construction from chrome vanadium steel for increased strength and durability. Size marking on shank allows easy identification. Yellow powder-coated finish provides high visibility and corrosion resistance. Hardened striking surface has chamfered edges for greater chipping resistance. Punch edge is ground to a precise angle for efficient punching and durability. Ideal for starting drill holes, marking metal or cutting/splitting hard stone, brick and concrete. Includes injection molded case for storing products. 6" length.

G2196695 12-piece set **\$19.92**

set includes: 3/4", 5/16", 3/32", 1/16", 3/8", 5/32", 3/16", 1/4", 5/16", 3/8", 1/2", 5/8"

12  
PIECE



**VALUE BRAND Junior Hacksaw**

Use for cutting metal in very restricted areas. Steel wire handle with finger guard. Built-in blade tensioning device lock. 9¾" overall length. 2½" throat depth. 6" blade. 32 tpi.

G0548405 **\$2.08**

**VALUE BRAND Claw Hammer**

This claw hammer is ideal for pulling nails. 16 oz hardened carbon steel head with a smooth face. 13" fiberglass handle.

■ ANSI STANDARDS

G3398884 **\$10.99**



**STANLEY Ball Pein Hammer**

Hammer features crowned striking face with beveled edges and spherical striking face. Used for bending and forming sheet metal, driving punches and chisels and setting rivets. Features overstrike protection. 32 oz high-carbon steel head. 1¼" head diameter. 15" overall length. ■ ANSI STANDARDS

G1065364 **\$17.88**



**PROTO Double-Faced Sledge Hammer**

Sledge hammers are ideal for applications requiring more weight and/or more leverage. Designed for heavy driving and demolition work on metal, concrete, stone and wood. Double-face hammer features large, flat striking faces. Strong 14" fiberglass handle with slip-resistant cushion grip. 3" x 1¼" heat-treated steel head. 2.5 lb head weight.

G0318455 **\$36.88**



2  
PIECE

**VALUE BRAND Strap Wrench Set**

Strap wrenches feature an I-beam handle for tight grip on polished pipe. For use on round and irregular shaped objects. Molded plastic handle with reinforced neoprene rubber strap.

G1274007 2-piece set **\$21.99**  
set includes: 1½" x 21" strap (3½" pipe capacity), 1¾" x 37½" strap (10" pipe capacity)



**STANLEY High-Tension Hacksaw**

Saw has adjustable tension to speed cutting and prolong blade life. Quick-release blade changing mechanism maintains tension setting. Blade can be positioned either at a 45° or 90° angle. Heavy-duty metal frame with 3½" throat depth holds blade up to 32,000 psi. For use on metal. Blade storage integrated into frame—12" blade included (15-631).

G2775001 **\$19.92**



**LENOX T2 Technology Hacksaw Blades**

For use on most metals—including un-hardened tool steel and stainless. ½" x 12" tuff tooth bi-metal blade. 24 tpi. ► MORE ONLINE

G0367857 10-pack **\$8.79**



MORE PIPE  
WRENCHES  
ON PAGE 31

G2415901 14"  
G1458816 18"  
G3015801 24"



BIG ENOUGH TO TACKLE THOUSANDS OF JOBS AND STILL SMALL ENOUGH TO FIT NICELY IN YOUR BACK POCKET!

**CHANNELOCK The Original Tongue and Groove Pliers**

Undercut tongue-and-groove design assures strong no-slip jaw action. Laser heat-treated right-angle teeth provide greater durability. GripLock jaw design accommodates many shapes. Hardened steel construction with corrosion-resistant polished finish. Flat jaw design with 5-position adjustment and cushion grip handle. ▶ **MORE ONLINE**



- G1776284 6½" (¾" jaw capacity) **\$9.17**
- G0842432 9½" (1½" jaw capacity) **\$11.08**

**VALUE BRAND Tongue and Groove Pliers**


Flat jaw design with 6-position grooved-joint adjustment. Angled teeth provide more points of contact for improved grip. Slightly curved gripping is ideal for odd shaped objects. Multilayer plating and coating process provides corrosion resistance. Hardened and tempered steel construction. Slip-resistant dipped grip handle.



- G2448564 6½" (¾" jaw capacity) **\$7.49**
- G0368252 10¼" (1¾" jaw capacity) **\$9.99**
- G0858794 12½" (1¾" jaw capacity) **\$11.99**

**IRWIN VISE-GRIP The Original Locking C-Clamps**

Plier-style c-clamps feature an easy-release trigger. Constructed of nickel-plated, heat-treated alloy steel, clamps have a micro-adjustment screw mechanism. For use on welding sheet metal or woodwork—6" size is ideal for working with smaller pieces or for holding materials in tight spaces. ■ **FEDERAL STANDARDS**

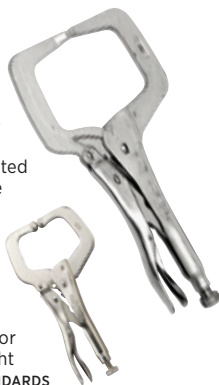

- G2350853 6" (2½" capacity, 1½" throat) **\$6.99**
- G3017637 11" (3¾" capacity, 2½" throat) **\$13.12**

**IRWIN VISE-GRIP The Original Curved Jaw Locking Pliers**

Locking pliers feature a curved jaw and can be used as a wire cutter, pipe wrench, speed wrench, clamp or pliers. Ideal for holding small objects. All have guarded release trigger and adjusting screw. Heat treated alloy steel construction with nickel-plated finish. Plain grip. ■ **FEDERAL STANDARDS**



- G2617693 4" (1⅝" jaw capacity) **\$5.69**
- G1382211 5" (1¾" jaw capacity) **\$6.89**
- G2836592 7" (1⅞" jaw capacity) **\$7.11**
- G0671501 10" (1⅞" jaw capacity) **\$7.22**

**PROTO C-Clamps**

Standard service, versatile deep throat style. Hot forged for strength and hard use. Forcing screw has heavy rolled Acme thread allowing the screw to turn easily under pressure and is less susceptible to damage. Forcing screw has a sliding T-handle and an impact resistant pad. ▶ **MORE ONLINE**



- G2664566 3" (2¾" throat, 3500 lb max) **\$22.99**
- G1631165 4" (2¾" throat, 6500 lb max) **\$28.63**

**VALUE BRAND C-Clamps**

Regular-duty clamps feature a grooved anvil and serrated pad. Drop-forged ductile iron frame has gray powder-coated finish. Spindle and pad are copper-plated.




- G3421957 4" (3¼" throat, 6200 lb max) **\$26.99**
- G0492423 6" (4½" throat, 6600 lb max) **\$37.99**
- G0944702 8" (5" throat, 6900 lb max) **\$45.99**

**VALUE BRAND Steel Spring Clamps**

Ergonomically designed clamps feature a tempered steel spring and polyvinyl tips and handle.

- G2740796 4" (1" jaw capacity) **\$1.29**
- G0936467 6" (2" jaw capacity) **\$1.99**
- G1288287 9" (3" jaw capacity) **\$3.29**

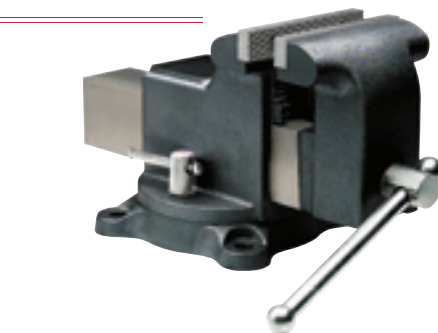

**VALUE BRAND Bench Vise**

Mechanic's bench vise features replaceable hardened steel serrated metal jaw with built-in pipe jaw. Built with 360° swivel base with serrated locking faces, double lock-downs and extra-deep throats. Enclosed box frame and steel channel. Cast iron construction. 5" opening (max). ½" to 1¼" pipe capacity. 2½" throat depth.

- G1664424 **\$62.99**



**STOREHORSE Folding Portable Sawhorse**

Sawhorse has folding legs for easy storage—folds to 7" x 5" x 31". Pre-drilled surface is ideal for mounting 2" x 4" board or roller assembly. Features a carrying handle for portability. 14-gauge galvanized steel construction. 31" w x 21" d x 28½" h.

- G0826007 **\$19.17**



**STANLEY PowerLock Measuring Tapes**

Tape measures feature a durable case with steel blade. Mylar polyester film helps extend life of the blade by adding strength and providing corrosion resistance. Secure blade lock won't creep during measurements. Corrosion-resistant Tru-Zero end hook provides accurate measurements. Inch/foot graduations—inches to 32nds first foot, 16ths thereafter. 16" and 19.2" stud center markings simplify framing jobs. Belt clip for easy portability. Slide forward lock. Automatic rewind. ► **MORE ONLINE**


- G1595964 ½" x 12' blade (metal case) **\$7.58**
- G2637065 ¾" x 12' blade (metal case) **\$9.19**
- G2573356 ¾" x 16' blade (ABS case) **\$6.89**



**STANLEY FatMax Measuring Tape**

High-impact ABS case with molded rubber grip holds up to heavy use. Cushion grip provides comfortable, slip-resistant hold. BladeArmor coating on the first 4" maximizes durability of the blade while Mylar polyester film extends the life of entire blade. Wide blade combined with three-rivet, corrosion-resistant Tru-Zero end hook offer easy readability for accurate measurements. Inch/foot graduations. 16" and 19.2" stud center markings simplify framing jobs. Top forward lock. Automatic rewind. 1¼" x 25' blade. 11' standout. ► **MORE ONLINE**

G1202564 **\$18.73**

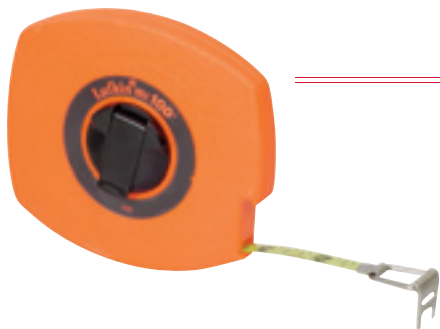

**LUFKIN Hand-Wind Measuring Tape**

Tape measure features a closed ABS plastic case with easy-wind nylon drum and removable belt clip. Hook ring is retained neatly in the contoured mouth of the case. Steel blade has a clear coating and easy-to-read black and red markings. Inch/foot graduations in ⅛" increments. Folding hook. Manual rewind. ⅝" x 100' blade.


G2897422 **\$22.14**

**JOHNSON**

**Professional Combination Squares**

Steel blade features permanently stamped graduations. Zinc head includes acrylic barrel level vial, self-aligning draw bolt and hardened scriber. 2-piece construction.

- G0336567 6" **\$5.85**
- G2274666 12" **\$7.99**
- G0884152 16" **\$11.99**

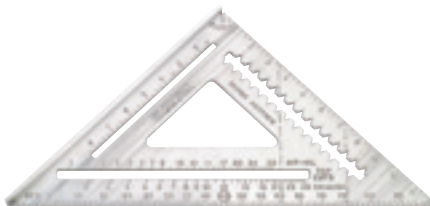

**JOHNSON**

**Professional Rafter Angle Square**

Milled aluminum construction with low-glare powder coat. 12" angle square features permanent molded graduations. Scribe notches starting at 1¼" transfer outside increments from pivot point. Instruction manual included.

G2293033 **\$12.30**

**VALUE BRAND**

**Machinist Scriber**

Machinist scriber features durable steel handle with both straight and 90° points. ⅜" diameter chrome-plated steel knurled handle. Includes threaded points—straight (2), 90° (1). 9" length.

G1174686 **\$1.19**



**PROTO**

**Pocket Magnetic Retrieving Tool**

Tool features a versatile telescoping handle with an all-angle ball joint connection to ½" diameter magnet. Handle telescopes from 16¾" to 26¾" length for greater retrieval distance. Magnet features 2lb pull capacity.

G3378216 **\$9.78**



**JOHNSON Stud Finder Plus**

Locates metal studs or nails with red swinging indicator magnet. Features a built-in level vial, high-impact plastic body and acrylic cover.

G1111223 **\$2.72**



**JOHNSON**

**Magnetic Aluminum Torpedo Level**

Contractor/Industrial level features 360° SurroundView acrylic reading vials—level, plumb and 45°. Level vial is also top-reading. Vials have durable high-impact plastic covers and are surrounded by an aluminum frame. Magnetic edge holds to metal surfaces. 9" length.

G1793495 **\$7.36**

**VALUE BRAND**

**Inspection Mirror**

Telescoping inspection mirror features a magnetic tip for retrieval. 4½" to 17" telescoping handle is constructed of metal with a copper shaft. Handle connects to 1¼" round glass mirror with a double ball joint.

G1661466 **\$3.89**



**VALUE BRAND**

**Inspection Mirror**

Telescoping inspection mirror features a soft rubber-grip handle for comfort. Handle telescopes from 11" to 30" length for greater reach and features a stainless steel shaft. Handle connects to 3½" x 2" glass mirror with a double ball socket joint.

G0682945 **\$4.99**







10  
PIECE

10  
PIECE

**VALUE BRAND Hex Bit Socket Sets**

Bits are machine pressed into the socket for maximum strength. Full-polish chrome finish.  $\frac{3}{8}$ " and  $\frac{1}{2}$ " drive sizes. Each set comes in a blow-molded case. ■ DIN STANDARDS

**SAE Set**

**G2557965** 10-piece set **\$49.99**

set includes:  $\frac{1}{8}$ ",  $\frac{9}{32}$ ",  $\frac{3}{16}$ ",  $\frac{7}{32}$ ",  $\frac{1}{4}$ ",  $\frac{5}{16}$ ",  $\frac{3}{8}$ ",  $\frac{1}{2}$ ",  $\frac{9}{16}$ ",  $\frac{5}{8}$ "

**Metric Set**

**G3179355** 10-piece set **\$49.99**

set includes: 4mm, 5mm, 6mm, 7mm, 8mm, 9mm, 10mm, 12mm, 14mm, 17mm



**VALUE BRAND Drive Ratchets**

Mechanic's tools are industrial-grade for heavy-duty applications and production use. Pear-head design features geared teeth and a reversible quick release. Chrome finish.

**G3409944**  $\frac{3}{8}$ " drive, 7 $\frac{3}{4}$ " length **\$14.99**

**G1919312**  $\frac{1}{2}$ " drive, 10" length **\$19.99**



**CRAFTSMAN INDUSTRIAL Mechanic's Tool Set**  
Mixed-length socket set includes SAE and metric sizes in a variety of configurations and additional tools and accessories to round out the collection. All 99 pieces fit snugly in a blow-molded carrying case. Chrome finish.

**G3453843** 99-piece set **\$155.99**  
set includes: quick-release ratchets ( $\frac{1}{4}$ ",  $\frac{3}{8}$ ",  $\frac{1}{2}$ "),  $\frac{1}{4}$ " 6-pt standard ( $\frac{3}{32}$ " to  $\frac{1}{2}$ ", 4mm to 13mm),  $\frac{3}{4}$ " 6-pt deep ( $\frac{3}{16}$ " to  $\frac{1}{2}$ ", 4mm to 13mm),  $\frac{3}{8}$ " 6-pt deep (10mm to 19mm),  $\frac{3}{8}$ " 8-pt std ( $\frac{3}{4}$ " to  $\frac{7}{16}$ "),  $\frac{3}{8}$ " 12-pt standard ( $\frac{3}{8}$ " to  $\frac{13}{16}$ ", 9mm to 19mm),  $\frac{3}{8}$ " 12-pt deep ( $\frac{3}{8}$ " to  $\frac{13}{16}$ "),  $\frac{1}{2}$ " 12-pt standard ( $\frac{1}{2}$ " to 1"),  $\frac{1}{4}$ " extension bar (3", 6"),  $\frac{1}{4}$ " spinner handle (6"),  $\frac{3}{8}$ " extension bar (3", 6", 10"),  $\frac{3}{8}$ " spark plug socket ( $\frac{3}{8}$ ",  $\frac{13}{16}$ "),  $\frac{1}{2}$ " adapter( $\frac{3}{8}$ ")



99  
PIECE




33  
PIECE

**VALUE BRAND Socket Set**

Set includes both SAE and metric sizes. All sockets feature a  $\frac{3}{8}$ " 12-point standard drive and fit into a blow-molded case. Chrome finish.

**G1782584** 33-piece set **\$39.47**

set includes: SAE ( $\frac{1}{4}$ ",  $\frac{5}{16}$ ",  $\frac{3}{8}$ ",  $\frac{7}{16}$ ",  $\frac{1}{2}$ ",  $\frac{9}{16}$ ",  $\frac{5}{8}$ ",  $\frac{11}{16}$ ",  $\frac{3}{4}$ ",  $\frac{13}{16}$ ",  $\frac{7}{8}$ "), metric (6mm, 7mm, 8mm, 9mm, 10mm, 11mm, 12mm, 13mm, 14mm, 15mm, 16mm, 17mm, 18mm, 19mm, 20mm, 21mm, 22mm),  $\frac{7}{16}$ " quick-release ratchet, extension bars (3", 6"), spark plug socket ( $\frac{3}{8}$ ",  $\frac{13}{16}$ ")

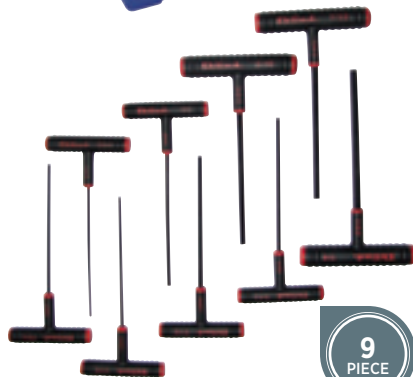

9  
PIECE

**EKLIND Power-T Hex Key Set**

T-handle keys feature ergonomic, slip-resistant grips which provide extra torque and safety. Manufactured from alloy steel with a black finish. Short 6" arm. Includes pouch. ■ ANSI STANDARDS

**G1402371** 9-piece set **\$17.93**

set includes:  $\frac{9}{64}$ ",  $\frac{3}{32}$ ",  $\frac{7}{64}$ ",  $\frac{1}{8}$ ",  $\frac{9}{64}$ ",  $\frac{5}{32}$ ",  $\frac{3}{16}$ ",  $\frac{7}{32}$ ",  $\frac{1}{4}$ "

**EKLIND Classic Folding Hex Key Sets**

Each set of alloy steel keys is housed in a one-piece handle designed to operate smoothly as well as hold the keys firmly in any desired work position. ■ ANSI, FEDERAL STANDARDS

**Metric Set**

**G2191637** set **\$2.59**

set includes: 1.5mm, 2mm, 2.5mm, 3mm, 4mm, 5mm, 6mm



**SAE Set**

**G3502335** set **\$4.49**

set includes:  $\frac{3}{16}$ ",  $\frac{7}{32}$ ",  $\frac{1}{4}$ ",  $\frac{5}{16}$ ",  $\frac{3}{8}$ "

7  
PIECE

**VALUE BRAND Nut Driver Set**

Nut driver set features a chrome-plated hollow shaft and three-sided, double injection handle. Handles are color coded. 3" shank. 7 $\frac{1}{2}$ " overall. Includes plastic carrying caddy. ■ ANSI STANDARDS

**G1807976** 7-piece set **\$26.99**

set includes:  $\frac{3}{16}$ ",  $\frac{1}{4}$ ",  $\frac{5}{16}$ ",  $\frac{11}{32}$ ",  $\frac{3}{8}$ ",  $\frac{1}{2}$ ",  $\frac{5}{8}$ "

**EKLIND Ergo-Fold Folding Hex Key Set**

Ball-end key set features an ergonomic fold-up handle. Soft cushion-grip insert offers comfort and slip resistance, while a hard shell provides maximum strength. Alloy steel blade construction. ■ ANSI, FEDERAL STANDARDS

**G2491447** set **\$7.99**

set includes:  $\frac{9}{64}$ ",  $\frac{3}{32}$ ",  $\frac{7}{64}$ ",  $\frac{1}{8}$ ",  $\frac{9}{64}$ ",  $\frac{5}{32}$ ",  $\frac{3}{16}$ ",  $\frac{7}{32}$ ",  $\frac{1}{4}$ "



**VALUE BRAND Multi-Tool & Utility Knife Set**

Pocket multi-tool is small and light enough to be carried in a pants pocket. Multi-tool includes long nose pliers, standard pliers, wire cutter, serrated edge knife blade, file, slotted screwdriver, phillips screwdriver, small slotted screwdriver, large slotted screwdriver, bottle opener and can opener. Stainless steel construction with rubber insert handle. 6" open. 3 3/4" closed.

Folding utility knife features a quick-change blade that folds away for safe storage and can cut drywall, string, tape, wall coverings and most soft materials. Stainless steel knife head with straight aluminum handle. High-carbon steel clip-point blades (11). 6" length.

G1771341 set **\$39.99**  
set includes: multi-tool, utility knife, carrying pouch



**LEATHERMAN**

**Wingman Multi-Tool**

Lightweight, pocket-sized design features stainless steel construction. Multi-tool includes spring-action needle nose pliers, spring-action regular pliers, spring-action wire cutters, 420HC combo knife, package opener, wood/metal file, scissors, small screwdriver, medium screwdriver, phillips screwdriver, ruler, bottle opener, can opener and wire stripper. Includes removable pocket clip. Interior and exterior tool access. Locking blade. 6 1/4" open. 3 13/16" closed.

G4411942 **\$23.32**



**SOG Kilowatt Knife**

Three separate systems address wire from fine multi-strand all the way up to cable. Stripper bar for wire sizes of 12 to 22 AWG. Adjustable spring-loaded UTP/wire stripper in the back. Hole stripper that uses the main blade. Schematic grips, hi-voltage tower clip, insulator thumb stud and a blade with receptacle engraving. Glass reinforced Zytel handle. Includes pocket clip and wire strippers. 3 1/2" straight-edge, drop-point folding blade. One-handed operation. 7 1/2" open. 4 7/16" closed.

G3161505 **\$34.99**



**VICTORINOX SWISS ARMY**

**Swiss Tool Multi-Tool**

Pocket-sized multi-tool is small and light enough to be carried in a pants pocket. Large center-opening tool is built for tough jobs. Multi-tool features 12 stainless steel tools with 27 functions. Includes cordura belt pouch. Open or closed tool access. 4 1/2" closed.

G1519113 **\$69.99**



**SOG Contractor 2x4 Knife**

Knife features bubble level, pencil sharpener and wire stripper in the handle. Zytel handle includes pocket clip, pencil sharpener, level, wire stripper and lucky nail. 3" stainless steel sheepfoot straight blade. One-handed operation. 7 1/2" open. 4 1/2" closed.

G0394685 **\$22.99**



**VICTORINOX SWISS ARMY**

**Classic SD Folding Knife**

Multi-tool features scratch-resistant anodized aluminum dividers and high-carbon stainless steel blade. It is small and light enough to be carried in a pants pocket. Includes blade, scissors, nail file with screwdriver tip, toothpick, tweezers and key ring. 2 1/4" closed.

G2973555 **\$10.99**



**WINCHESTER Folding Pocket Knife**

Knife features a surgical stainless steel blade and nickel silver handle with wood grain inlays. 2 5/8" drop-point locking blade with serrated edge. One-hand operation. 6" open, 3 1/2" closed.

G0651262 **\$8.93**



**RETRACTABLE-BLADE UTILITY KNIVES**

Retractable blades offer storage and are safe for transport. Knives can cut paper, cardboard, leather, drywall, plastic sheeting and other materials.

**STANLEY Homeowners' Retractable Utility Knife**

Lightweight, versatile plastic knife body construction for light duty use. Machine screw firmly holds knife body together—screwdriver required for blade change. 3-position locking blade—works with most standard utility blades. Features a hang-hole for adding a wrist strap or lanyard. Includes high-carbon steel blade. Straight handle. 6" length.

G0908862 **\$2.09**



**STANLEY Quick-Change Retractable Utility Knife**

Durable, aluminum knife body construction features quick one-button blade change—no tools required. Interlocking nose design helps secure blade and helps prevent body separation. Integrated string cutter when blade is retracted. 3-position locking blade—works with most standard utility blades. Features a hang-hole for adding a wrist strap or lanyard. Swing-out blade storage for easy blade access. Includes 2-sided high-carbon steel utility blades (3). Straight handle. 6 3/8" length.

G1504745 **\$4.79**



**STANLEY FatMax Retractable Utility Knife**

Designed for repetitive heavy-duty cutting applications. Retractable blade offers variable cut depth. Push button for instant blade change—no tools required. Metal handle with thermoplastic rubber (TPR) soft-touch panel grips for better control and fewer slips. Thumb pad and ergonomically designed cutting angle for more comfortable use. Blade storage holds up to 5 blades—works with most standard utility blades. Includes FatMax blades (5). 6 5/8" length.

G2137712 **\$7.99**



**STANLEY Heavy-Duty Utility Blades**

Standard 2-point blades are made of high-carbon steel with a precision honed edge. Blade is made for general purpose cutting. Fits most standard utility knives. Includes dispenser. 2 7/16" length.

G0984733 100-pack **\$11.61**







**CLC Electrical & Maintenance Tool Carrier**

Polyester tool carrier has a box-shaped design and a large 11" x 6" multi-compartment parts tray that stores conveniently beneath the main tool area. Carrier features 16 multi-use outside pockets and 7 inside to organize a wide range of tools and accessories. Extra padded carrying handle and adjustable shoulder strap. Electrical tape strap. 10" w x 11" d x 19" h.

G1409274 **\$33.98**



**CLC Professional Electricians' Tool Pouch**

Premium quality electricians' tool pouch with 21 pockets has a zippered, fold-down cover to protect your tools. Pouch features a steel hammer loop, an ergonomic rubber handle, an adjustable padded shoulder strap and an airmesh padded back panel for comfort. Fits standard workbelts up to 2 3/4" wide.

G0753277 **\$28.45**

**VALUE BRAND Wide Mouth Tool Bag**

Constructed of 600 Denier polyester, bag features reinforced top opening with 17 inside and 6 outside pockets. Adjustable shoulder strap. 13" w x 9 3/4" d x 9" h.

G2776182 **\$14.00**



**CLC Large BigMouth Tool Tote Bag**

BigMouth polyester tote bag has 12 multi-use pockets inside and 10 outside. Opens wide for easy access to bag's contents. Padded web carrying handles and adjustable shoulder strap. 16" w x 8 1/2" d x 10" h.

G1779802 **\$19.99**



**CLC Web Work Belt**

Fully adjustable polyester web work belt features a heavy-duty quick-release buckle. 29" to 46" waist.

G3257667 **\$4.49**



**CLC Reinforced Mason's Tool Bag**

Quality mason's tool bag is made of heavy-duty cotton canvas with leather handles and straps. Bag features a suede leather bottom for extra strength and durability. Large inside pocket. 20" w x 6" d x 16" h.

G0778811 **\$43.99**

**CLC MegaMouth Tool Tote Bag**

MegaMouth tool bag has 24 outside pockets, 8 multi-use inside pockets and an extra-large interior compartment for tools and parts. Padded handles and adjustable shoulder strap. Durable polyester construction. 24" w x 12" d x 11" h.

G2560695 **\$31.99**



**ERGODYNE Wrench Roll-Up Bag**

This canvas organizer is great for storing and carrying wrenches. 14 pockets. 1" w x 5" d x 16" h.

G3951394 **\$19.76**

wrenches NOT included



bucket NOT included

**CLC Bucket Organizer**

Designed for organizing a wide range of tools and accessories. Bucket organizer is made of polyester and features 36 triple-row exterior pockets and 25 double-row interior pockets. Organizer includes a cordless drill pocket with a side-release buckle security strap. Designed to fit most standard 3 1/2 to 5 gallon buckets. 11 1/2" diameter, 7" height.

G2544114 **\$18.39**


tools NOT included

**VALUE BRAND Portable Tool Box**  
Flat-top design makes boxes stackable. Removable plastic tray organizes small tools and supplies. Steel latching system. 13" w x 6½" d x 5½" h.  
G2764544 **\$5.99**



**VALUE BRAND 3-Drawer Portable Chest**  
Shell is constructed of heavy-duty, high-impact polypropylene resins. Steel drawers have full-extension slides that lock when lid is closed. 23" w x 10½" d x 13½" h.  
G2810911 **\$38.87**

**KENNEDY Portable Cantilever Toolbox**  
Cantilever toolbox is constructed of steel and features quality plated, rust-resistant locking hardware and a steel core, vinyl-cushioned handle. Includes 4 trays—2 moveable trays with removable partitions and divider set. 22½" w x 10½" d x 12½" h.  
G2817744 **\$125.99**

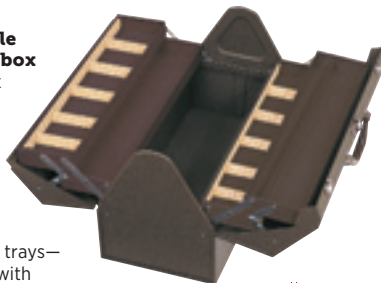

**STANLEY Fat Max Tool Box**  
Tough metal and resin construction. Tall tool box features a vertical storage unit for organization and easy access. Portable tray for hand tools and small parts. Large heavy-duty metal latches are strong and rustproof. Lockable—designed with holes for inserting a lock. Integrated V-grooves on lid to meet any onsite sawing and adjusting needs. 26" w x 12" d x 12" h.  
G3142605 **\$36.75**



**CONTICO Mobile Storage Locker**  
Lockable, stackable, wheeled locker. Nickel-plated, rust-resistant latches and metal hinge pins provide strength. Padlock eye accommodates ½" padlock or smaller. Side grips supplement top handle. 23½ gal capacity. 32" w x 17" d x 12¼" h.  
G2946081 **\$31.49**



**CONTICO Pro TuffBin Storage Box**  
Large capacity, virtually rustproof bin. Heavy-duty ribbed construction handles heavy loads. Ideal for storage of tools and valuables. Each box has a molded-in lockable hasp and recessed, soft-grip handles. Lock and keys included. 37" w x 21" d x 20" h.  
G0816715 **\$52.89**



**GREENLEE Mobile Storage Chest**  
Recessed and concealed lock protectors for maximum security against drilling and cutting lock. Finger-groove lid handle for easy opening. Convenient storage tray on back wall for small items. Steel support arm holds lid in open position. Heavy-duty piano hinges with non-removable pin. 16-gauge steel construction. 25 cu-ft capacity. 48" w x 30" d x 30" h.  
G4021893 **\$467.99**



**JOBBOX Jobsite Welder's Box**  
Reinforced 16-gauge welded steel construction with powder-coated finish and welded hasp locking system. Features knock-out hole for storing tools connected to a supply hose. Folding side handles for portability. 3.3 cu-ft capacity. 30" w x 16" d x 12" h.  
G0992993 **\$123.80**



**JOBBOX Jobsite Piano Box**  
Reinforced 16-gauge welded steel construction with powder-coated finish. Piano box features 500 lb capacity rear shelves and side storage bins. Lift-n-stow bottom shelf lifts up to provide nearly 12" additional height for easier loading and unloading of large items in the bottom. Ez-Loader skid bolsters allow box to be forklifted. Hinged lid with locking arm features gas spring door lifts. Recessed handles on either side. 47½ cu-ft capacity. 60" w x 31½" d x 49½" h.  
G0591123 **\$849.19**





**VALUE BRAND**

**3.6V Cordless Screwdriver Kit**

Cordless screwdriver features a LED work light display. Soft-touch pistol-grip handle for comfort. Adjustable clip-spring clutch. Forward/reverse switch. 1/4" hex drive chuck. 180 rpm. 31-in-lb torque (max).

G2185811 kit **\$26.99**

kit includes: cordless screwdriver, bits (#1, #3), integral battery, 120 V lithium ion battery charger



**MILWAUKEE Right Angle Attachment**

Compact design allows work in tight, difficult work areas. Durable all-metal housing and steel gears. For use with most brands of screwdrivers, cordless and corded drills. Accepts standard 1/4" hex drive accessories. Rated up to 235 in-lb of torque. 2.4 to 18 V. #2 square drive bits (1 5/16" & 1 5/16" lengths) and square drive adapter (2 1/4" hex x 1/4" male) included. 90° angle.

G2603833 **\$45.79**

**HUBBELL BD Series Tool Retractors**

Molded ABS housing has a smooth exterior with rounded edges designed for maximum ergonomic appeal. Hand-windable spring tension adjustment knob is flush with the housing. Rugged steel upper swivel hook with secondary safety cable provision. Over-sized cable opening with direct in-line pull reduces cable wear. Adjustable cable stop and lower safety hook. 6' nylon-covered galvanized steel aircraft cable—270 lb test. 2 7/8" w x 4" d x 9 1/4" h. 1 lb reel.

G1757935 0.5 to 1.5 lb **\$39.99**

G0251011 1.5 to 3.0 lb **\$44.85**



**HUBBELL BG Series Tool Retractor**

Rugged steel reel features reinforced hanging bracket with forged clevis for ceiling mounting and extra holes for safety chain attachment. Spring is permanently lubricated and provides constant tension. Includes safety tool clip and adjustable cable stop. For use with 10 to 15 lb tools. 8' nylon-covered galvanized steel aircraft cable—920 lb test. 3 3/8" w x 8 3/4" d x 13 7/8" h. 8 lb reel.

G0642162 **\$209.99**



**DAYTON Horizontal Band Saw**

Dry-cut, 3-speed saw features a swivel-vice jaw and can operate in horizontal or vertical position. Adjustable leveling machine pads. Oil bath worm gear train. Adjustable roller bearing blade guides. Auto shut-off at end of cut. 45° miter capacity. 5 1/2" cutting thickness (max). Single-phase motor. 1/2 HP. 115/230 V. 1725 rpm. 80/120/200 fpm. 1/2" x 64 1/2" blade (max). 0.025" blade thickness. 40" w x 19" d x 36" h. ■ UL STANDARDS

G3096922 **\$400.89**



33  
PIECE

**IRWIN Screwdriver Bit Set**

Set includes popular insert bits, power bits and nutsetters constructed of S2 steel. 1/4" hex shank.

G2490433 33-piece set **\$13.69**

set includes: 1" phillips bits {#1 (2), #2 (12), #3 (2)}, 1" square recess bits {#1 (1), #2 (5), #3 (1)}, 1 1/8" MAG nutsetters {3/4" (1), 5/8" (1), 3/8" (1)}, 2" phillips power bit {#2 (1)}, 1" slotted bits {6-8 (2), 8-10 (2), 10-12 (1)}, magnetic bit holder



**IRWIN Phillips Power Bit**

Long length for hard-to-reach fasteners. Screwdriver bit is constructed of S2 tool steel with a Rockwell Hardness of 58 to 62. Phillips #2 point. 1/4" shank. 6" length.

G1204147 **\$1.89**

**MILWAUKEE Shockwave Driver Bit Set**

Made from proprietary steel and heat treated for maximum strength and durability. Geometric design provides shock absorption. The forged tip allows for a secure grip. For use with impact drivers. Includes case with bulk storage container.

G0249261 29-piece set **\$19.97**

set includes: 1" phillips bits {P1 (1), P2 (7), P3 (2)}, 2" phillips bits {P2 (2), P3 (1)}, 1" square bits {SQ1 (1), SQ2 (4)}, 2" square bits {SQ3 (1), SQ2 (2)}, 1" torx bits {T15 (1), T20 (1), T25 (1)}, 2" torx bit {T25 (1)}, magnetic nut drivers {3/4" red (1), 5/8" amber (1), 3/8" blue (1)}, magnetic bit holder



29  
PIECE

**IRWIN Pro-Pack Phillips Insert Bits**

Plastic case keeps bits in one place. Screwdriver bits are constructed of S2 tool steel with a Rockwell Hardness of 58 to 62. Phillips #2 point. 1/4" shank. 1" length.

G1035255 20-pack **\$4.44**



**IRWIN Hex Insert Bit Holder**

C-ring design has an internal clip that fits into the retaining ring notch of the insert bit to hold securely in place. Can be used with a socket wrench or socket adapter. Constructed of magnetic alloy tool steel. 1/4" hex drive. 1/4" hex shank. 3" length.

G0553375 3-pack **\$8.99**



**MILWAUKEE Jobsite Radio**

AM/FM radio features a digital tuner with advanced digital signal processing and high-performance speakers. ABS polymer and steel construction protects internal components from weather and abusive job site conditions. Weather sealed auxiliary compartment protects MP3 players and other audio devices. Built-in bottle opener is a convenience on and off the job site. AC/DC versatility. USB output provides power to charge most small electronic devices. Integrated cord wrap easily stores the 6' AC cord. Includes AA batteries (2).

G2403947 **\$119.00**



**BOSCH Power Box 360° Jobsite Stereo**

AM/FM stereo with 360° sound features 4-way speakers and subwoofer. Stereo is moisture and dust-resistant and incased in an aluminum and rubber roll cage. Advanced digital tuning with 20 FM and 10 AM presets. Five preset equalizer settings with separate bass and treble controls. Digital media bay for MP3 players, portable CD players, SD memory cards, USB thumb drive and storage devices. 4-way power outlets. 12V DC adapter charges cell phones. Includes 6' AUX cable and AA batteries (2).

G1279634 **\$199.99**



**MAKITA 18 V Battery Pack and Charger**

18 V Li-Ion battery is for use with all Makita LXT and lithium ion 18 V tools and accessories. 3 Ah battery capacity. ► MORE ONLINE

G1826352 battery **\$103.24**  
G0514613 charger **\$91.99**



**WELLER**

**Electric Industrial Heat Gun**

Designed for assembly and repair applications, this lightweight heat gun comes complete with a set of four baffle adapters. Oil- and heat-resistant gun with a 6' cord and 3-wire grounded plug. ESD safe. 750° to 800°F. 500 fpm air velocity. 2.7 cfm air volume.

G2721293 **\$84.22**

**DAYTON Electric Pencil Engraver**

Engraver features an adjustable stroke which can etch fine lines to deep grooves. For use on metal, plastic, glass, ceramic or wood. This 2-speed electric pencil engraver has a solid stainless steel body with an ergonomic grip which provides comfort and ease of use. Includes diamond engraving tip. Corded. 3600 to 7200 strokes/min. 6½" length. 0.4 lb.

G4017422 **\$40.63**



**QEP Master Cut Portable Tile Saw**

Portable wet cutting for use on ceramics, slate, marble, granite and porcelain. Steel table features tilt control for precision 15°, 30° and 45° cuts. The unit comes equipped with a 7" diamond blade, a rip/angle guide and a tilt-up cutting table for miter cuts. ¾ HP. 120 V. 3.8 A full load. 1½" cut depth.

G1013074 **\$54.71**



**MILWAUKEE 12 V Battery Pack and Charger**

Compatible with all products in the M12 Cordless Tool System, the M12 Red Lithium battery provides exceptional runtime, performance and durability for the professional tradesman. 1.5 Ah battery capacity.

G3394151 battery **\$39.00**  
G1756711 charger **\$47.94**



**MILWAUKEE 28 V Battery Pack and Charger**

28V Li-Ion battery is for use with V28 and M28 tools. Battery features LED charge indicator, nonslip grip surface and Milwaukee Digital Power Management System. 3 Ah battery capacity.

G2013182 battery **\$145.60**  
G1088507 charger **\$51.31**



**MILWAUKEE 18 V Battery Packs and Charger**

Compatible with all products in the M18 Cordless Tool System, Red Lithium battery packs provide exceptional runtime, performance and durability for the professional tradesman. Batteries feature overload protection, a temperature management system, individual cell voltage monitoring, discharge protection and a battery fuel gauge. 1.5 Ah battery capacity (compact), 3 Ah battery capacity (high capacity).

G1190016 compact **\$72.56**  
G3340741 high capacity **\$99.00**  
G1850125 charger **\$96.53**



**MILWAUKEE Multibay Charger**

Smart charger for use with all Milwaukee slide-on batteries in 1 hour or less. Cord wrap makes charger easy to carry between job sites and also acts as side impact protection. Protection roll bar, over-molded base and dust cover for charging terminals make it perfect for jobsite use. Features large LED charging status indicators that are highly visible from distance. For use with Milwaukee M28 Li-Ion, 18.0V Li-Ion and NiCd batteries. 3 ports. 120 VAC input.

G0749217 **\$148.07**





**CHICAGO-LATROBE Hand Drill and Tap Set**

Drills are specified for 75% of thread height. 150D drills and taps are enclosed in a metal index case. HSS, bright finish. 150° drill point.

**G3227165** 18-piece set **\$49.99**  
set includes: drills (36, 29, 25, 21, 7mm, F,  $\frac{5}{16}$ ", U,  $\frac{7}{64}$ " ), taps (#6-32, #8-32, #10-24, #10-32,  $\frac{1}{4}$ "-20,  $\frac{3}{16}$ "-18,  $\frac{3}{8}$ "-16,  $\frac{7}{16}$ "-14,  $\frac{1}{2}$ "-13)



18  
PIECE

**VERMONT AMERICAN Electrician's Tap and Drill Bit Set**

Drills are specified for 75% of thread height. Carbon steel construction with black oxide finish. Carrying case included.

**G1930826** 13-piece set **\$17.84**  
set includes: drills (7, 21, 25, 29, 36, 43), taps (#4-40, #6-32, #8-32, #10-24, #10-32,  $\frac{1}{4}$ "-20), t-handle tap wrench




13  
PIECE

**VERMONT AMERICAN Tap and Die Set**

Set comes in a plastic storage case. High-carbon steel construction. Right hand.

**G0963654** 40-piece set **\$115.49**  
set includes: 1" hex dies (3mm x .50 taper to 8mm x 1.25 taper, 9mm x 1.00 plug to 12mm x 1.75 plug,  $\frac{1}{8}$ -28 BSP pipe), taper wrench (tap sizes #4 to  $\frac{1}{2}$ " ), die stock ( $\frac{1}{2}$ " round or hex dies), T-handle tap wrench (tap sizes #0 to  $\frac{1}{2}$ " ), T-handle tap wrench (tap sizes  $\frac{3}{4}$  to  $\frac{1}{2}$ " ), metric thread gauge (0.45 to 2.50 mm threads), #5 screwdriver

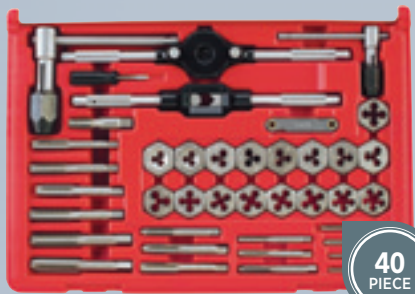

40  
PIECE

**LPS Tapmatic #1 Gold Cutting Fluid**

Protects and lubricates, reducing friction and eliminating chip welding in tapping, drilling, reaming and threading. Does not contain CFCs, chlorinated paraffins, water, solvents or inactive fillers. Excellent for steel and aluminum—safe to use on all metals.

**G1044242** 16 oz **\$9.99**  
**G2845017** 1 gal **\$55.99**



**LPS Tapmatic Edge Lubricant**

Biodegradable, solid, white waxy bar is packaged in a cylinder for easy application to rotating or stationary cutting tools. Excellent for sawing applications, eliminating heat buildup and belt loading. Low toxicity. Compatible with oil and water systems. Safe on all metals. 13oz.

**G3195096** **\$12.63**



**ONSRUD High-Performance Carbide Routing Single End Mills**

Material-specific routing and milling tools. Solid carbide upcut spiral O-flute. Single end. Right-hand, center cutting.  $\frac{1}{4}$ " shank.

► MORE ONLINE

**List #63-600**

For use on aluminum plate and single/multi sheet aluminum.  $\frac{1}{4}$ " diameter.  $\frac{3}{4}$ " flute. 2 $\frac{1}{2}$ " length.

**G1817076** **\$30.64**

**List #63-700**

For use on hard plastic—cast acrylic, nylon and PVC.  $\frac{3}{8}$ " diameter.  $\frac{1}{2}$ " flute. 2" length.

**G2257412** **\$22.70**



25  
PIECE



**IRWIN HANSON Screw Extractor Set**

Multi-spline extractors can be used to remove broken studs, bolts, socket screws and fittings for high torque applications. Left-hand spiral design provides extra gripping power. High carbon steel construction is heat treated and tempered for long life. ► MORE ONLINE

**G0837426** 25-piece set **\$50.99**  
set includes:  $\frac{1}{8}$ ",  $\frac{9}{32}$ ",  $\frac{3}{16}$ ",  $\frac{1}{4}$ ",  $\frac{5}{32}$ ",  $\frac{3}{16}$ ",  $\frac{1}{2}$ ",  $\frac{11}{32}$ ",  $\frac{3}{8}$ ",  $\frac{13}{32}$ ",  $\frac{1}{2}$ ",  $\frac{5}{8}$ ",  $\frac{3}{4}$ ",  $\frac{17}{32}$ ",  $\frac{1}{2}$ ",  $\frac{19}{32}$ ",  $\frac{5}{8}$ ",  $\frac{21}{32}$ ",  $\frac{11}{16}$ ",  $\frac{23}{32}$ ",  $\frac{3}{4}$ ",  $\frac{25}{32}$ ",  $\frac{13}{16}$ ",  $\frac{27}{32}$ ",  $\frac{3}{4}$ "



**POWERCOIL Helical Thread Repair Kit**

Free-running repair kit with drill bit is for use on metal. 304 stainless steel construction. Metric fine thread.

**G1262572** kit **\$51.60**  
kit includes:  
M10 x 1.0 x 15mm inserts (15),  
HSS STI tap, installation tool,  
 $\frac{13}{32}$ " HSS drill bit



**IRWIN UNIBIT HSS Step Drill Bits**

Ideal for drilling multiple diameter holes in steel, copper, brass, aluminum, PVC, wood and laminates up to  $\frac{1}{8}$ " thick. Bits have Speed Point tip design and single flute cutting edge—design ensures true starts without walking even on curved surfaces. High speed steel construction.

Item #	(holes) sizes	step shank	Unibit	price
<b>G1647502</b>	(13) $\frac{1}{8}$ " to $\frac{1}{2}$ "	$\frac{3}{8}$ "	#1	<b>\$10.99</b>
<b>G0919834</b>	(6) $\frac{3}{16}$ " to $\frac{1}{2}$ "	$\frac{1}{8}$ "	#2	<b>\$10.99</b>
<b>G1959176</b>	(9) $\frac{1}{4}$ " to $\frac{3}{4}$ "	$\frac{1}{8}$ "	#3	<b>\$16.79</b>
<b>G1931483</b>	(12) $\frac{3}{16}$ " to $\frac{7}{8}$ "	$\frac{1}{8}$ "	#4	<b>\$29.99</b>
<b>G1716994</b>	(2) $\frac{7}{8}$ " to 1 $\frac{3}{8}$ "	$\frac{1}{4}$ "	#9	<b>\$33.69</b>
<b>G0600537</b>	(8) $\frac{3}{8}$ " to 1"	$\frac{3}{8}$ "	#20	<b>\$24.49</b>

**CHICAGO-LATROBE Jobber Drill Bits**

Heavy-duty drills are for use on alloy, stainless and tool steels and on titanium. Cobalt steel construction with a straw finish. 135° split point. List #550. ■ NATIONAL AEROSPACE STANDARDS ► MORE SIZES ONLINE

<b>G3325917</b>	$\frac{5}{32}$ " (2 $\frac{1}{4}$ " length)	<b>\$1.39</b>
<b>G1207701</b>	$\frac{1}{8}$ " (2 $\frac{3}{4}$ " length)	<b>\$1.69</b>
<b>G3192226</b>	$\frac{9}{32}$ " (2 $\frac{1}{2}$ " length)	<b>\$1.79</b>
<b>G2364354</b>	$\frac{5}{32}$ " (3 $\frac{1}{2}$ " length)	<b>\$2.09</b>
<b>G1762187</b>	$\frac{11}{32}$ " (3 $\frac{3}{4}$ " length)	<b>\$2.09</b>
<b>G2355132</b>	$\frac{3}{16}$ " (3 $\frac{1}{2}$ " length)	<b>\$2.49</b>
<b>G1854937</b>	$\frac{13}{32}$ " (3 $\frac{1}{2}$ " length)	<b>\$2.99</b>
<b>G1544006</b>	$\frac{7}{32}$ " (3 $\frac{3}{4}$ " length)	<b>\$3.19</b>
<b>G2375511</b>	$\frac{1}{4}$ " (4" length)	<b>\$3.29</b>
<b>G0840481</b>	$\frac{13}{32}$ " (4 $\frac{1}{2}$ " length)	<b>\$3.99</b>



**VALUE BRAND HSS Silver/Deming Drill**

Minimal adjustment needed during tool changes. No need for tool presetting. For general-purpose use on alloy and carbon steels, aluminum, brass, bronze, cast iron, nickel based alloys, plastic and wood. 118° conventional point. 6" length.  $\frac{1}{2}$ " reduced shank. ► MORE SIZES ONLINE

<b>G1398223</b>	$\frac{5}{16}$ "	<b>\$7.49</b>
<b>G1766721</b>	$\frac{9}{16}$ "	<b>\$7.99</b>
<b>G2011624</b>	$\frac{3}{4}$ "	<b>\$9.99</b>



**DRILL DOCTOR**

**DD350X Drill Bit Sharpener**


Easy chuck alignment system for quick, precise sharpening. 110 V, 1.75 A motor produces 20,000 rpm. Long-lasting diamond wheel sharpens standard twist, HSS, TiN, cobalt, carbide and masonry drills in under 60 seconds. Ideal for home workshop, homeowner or hobbyist. 118° sharpening angle. 180 grit diamond grinding wheel. Includes a  $\frac{3}{32}$ " to  $\frac{1}{2}$ " chuck ■ UL STANDARDS

**G1519253** **\$47.89**



**CHICAGO-LATROBE Jobber Drill Set**

Drills are for use on alloy, stainless and tool steels and on titanium. Cobalt steel construction with an amber oxide finish. 135° split point. List #550. Set includes metal case.



29  
PIECE

■ NATIONAL AEROSPACE STANDARDS  
G2442151 29-piece set **\$153.74**

set includes: 3/16", 3/8", 1/2", 5/8", 3/4", 7/8", 1", 1 1/8", 1 1/4", 1 1/2", 1 3/4", 1 7/8", 2", 2 1/8", 2 1/4", 2 1/2", 2 3/4", 3", 3 1/4", 3 1/2", 3 3/4", 4", 4 1/4", 4 1/2", 4 3/4", 5", 5 1/4", 5 1/2", 5 3/4", 6", 6 1/4", 6 1/2", 6 3/4", 7", 7 1/4", 7 1/2", 7 3/4", 8", 8 1/4", 8 1/2", 8 3/4", 9", 9 1/4", 9 1/2", 9 3/4", 10", 10 1/4", 10 1/2", 10 3/4", 11", 11 1/4", 11 1/2", 11 3/4", 12", 12 1/4", 12 1/2", 12 3/4", 14", 14 1/4", 14 1/2", 14 3/4", 16", 16 1/4", 16 1/2", 16 3/4", 18", 18 1/4", 18 1/2", 18 3/4", 20", 20 1/4", 20 1/2", 20 3/4", 22", 22 1/4", 22 1/2", 22 3/4", 24", 24 1/4", 24 1/2", 24 3/4", 26", 26 1/4", 26 1/2", 26 3/4", 28", 28 1/4", 28 1/2", 28 3/4", 30", 30 1/4", 30 1/2", 30 3/4", 32", 32 1/4", 32 1/2", 32 3/4", 34", 34 1/4", 34 1/2", 34 3/4", 36", 36 1/4", 36 1/2", 36 3/4", 38", 38 1/4", 38 1/2", 38 3/4", 40", 40 1/4", 40 1/2", 40 3/4", 42", 42 1/4", 42 1/2", 42 3/4", 44", 44 1/4", 44 1/2", 44 3/4", 46", 46 1/4", 46 1/2", 46 3/4", 48", 48 1/4", 48 1/2", 48 3/4", 50", 50 1/4", 50 1/2", 50 3/4", 52", 52 1/4", 52 1/2", 52 3/4", 54", 54 1/4", 54 1/2", 54 3/4", 56", 56 1/4", 56 1/2", 56 3/4", 58", 58 1/4", 58 1/2", 58 3/4", 60", 60 1/4", 60 1/2", 60 3/4", 62", 62 1/4", 62 1/2", 62 3/4", 64", 64 1/4", 64 1/2", 64 3/4", 66", 66 1/4", 66 1/2", 66 3/4", 68", 68 1/4", 68 1/2", 68 3/4", 70", 70 1/4", 70 1/2", 70 3/4", 72", 72 1/4", 72 1/2", 72 3/4", 74", 74 1/4", 74 1/2", 74 3/4", 76", 76 1/4", 76 1/2", 76 3/4", 78", 78 1/4", 78 1/2", 78 3/4", 80", 80 1/4", 80 1/2", 80 3/4", 82", 82 1/4", 82 1/2", 82 3/4", 84", 84 1/4", 84 1/2", 84 3/4", 86", 86 1/4", 86 1/2", 86 3/4", 88", 88 1/4", 88 1/2", 88 3/4", 90", 90 1/4", 90 1/2", 90 3/4", 92", 92 1/4", 92 1/2", 92 3/4", 94", 94 1/4", 94 1/2", 94 3/4", 96", 96 1/4", 96 1/2", 96 3/4", 98", 98 1/4", 98 1/2", 98 3/4", 100", 100 1/4", 100 1/2", 100 3/4", 102", 102 1/4", 102 1/2", 102 3/4", 104", 104 1/4", 104 1/2", 104 3/4", 106", 106 1/4", 106 1/2", 106 3/4", 108", 108 1/4", 108 1/2", 108 3/4", 110", 110 1/4", 110 1/2", 110 3/4", 112", 112 1/4", 112 1/2", 112 3/4", 114", 114 1/4", 114 1/2", 114 3/4", 116", 116 1/4", 116 1/2", 116 3/4", 118", 118 1/4", 118 1/2", 118 3/4", 120", 120 1/4", 120 1/2", 120 3/4", 122", 122 1/4", 122 1/2", 122 3/4", 124", 124 1/4", 124 1/2", 124 3/4", 126", 126 1/4", 126 1/2", 126 3/4", 128", 128 1/4", 128 1/2", 128 3/4", 130", 130 1/4", 130 1/2", 130 3/4", 132", 132 1/4", 132 1/2", 132 3/4", 134", 134 1/4", 134 1/2", 134 3/4", 136", 136 1/4", 136 1/2", 136 3/4", 138", 138 1/4", 138 1/2", 138 3/4", 140", 140 1/4", 140 1/2", 140 3/4, 142", 142 1/4", 142 1/2", 142 3/4, 144", 144 1/4", 144 1/2", 144 3/4, 146", 146 1/4", 146 1/2", 146 3/4, 148", 148 1/4", 148 1/2", 148 3/4, 150", 150 1/4", 150 1/2", 150 3/4, 152", 152 1/4", 152 1/2", 152 3/4, 154", 154 1/4", 154 1/2", 154 3/4, 156", 156 1/4", 156 1/2", 156 3/4, 158", 158 1/4", 158 1/2", 158 3/4, 160", 160 1/4", 160 1/2", 160 3/4, 162", 162 1/4", 162 1/2", 162 3/4, 164", 164 1/4", 164 1/2", 164 3/4, 166", 166 1/4", 166 1/2", 166 3/4, 168", 168 1/4", 168 1/2", 168 3/4, 170", 170 1/4", 170 1/2", 170 3/4, 172", 172 1/4", 172 1/2", 172 3/4, 174", 174 1/4", 174 1/2", 174 3/4, 176", 176 1/4", 176 1/2", 176 3/4, 178", 178 1/4", 178 1/2", 178 3/4, 180", 180 1/4", 180 1/2", 180 3/4, 182", 182 1/4", 182 1/2", 182 3/4, 184", 184 1/4", 184 1/2", 184 3/4, 186", 186 1/4", 186 1/2", 186 3/4, 188", 188 1/4", 188 1/2", 188 3/4, 190", 190 1/4", 190 1/2", 190 3/4, 192", 192 1/4", 192 1/2", 192 3/4, 194", 194 1/4", 194 1/2", 194 3/4, 196", 196 1/4", 196 1/2", 196 3/4, 198", 198 1/4", 198 1/2", 198 3/4, 200", 200 1/4", 200 1/2", 200 3/4, 202", 202 1/4", 202 1/2", 202 3/4, 204", 204 1/4", 204 1/2", 204 3/4, 206", 206 1/4", 206 1/2", 206 3/4, 208", 208 1/4", 208 1/2", 208 3/4, 210", 210 1/4", 210 1/2", 210 3/4, 212", 212 1/4", 212 1/2", 212 3/4, 214", 214 1/4", 214 1/2", 214 3/4, 216", 216 1/4", 216 1/2", 216 3/4, 218", 218 1/4", 218 1/2", 218 3/4, 220", 220 1/4", 220 1/2", 220 3/4, 222", 222 1/4", 222 1/2", 222 3/4, 224", 224 1/4", 224 1/2", 224 3/4, 226", 226 1/4", 226 1/2", 226 3/4, 228", 228 1/4", 228 1/2", 228 3/4, 230", 230 1/4", 230 1/2", 230 3/4, 232", 232 1/4", 232 1/2", 232 3/4, 234", 234 1/4", 234 1/2", 234 3/4, 236", 236 1/4", 236 1/2", 236 3/4, 238", 238 1/4", 238 1/2", 238 3/4, 240", 240 1/4", 240 1/2", 240 3/4, 242", 242 1/4", 242 1/2", 242 3/4, 244", 244 1/4", 244 1/2", 244 3/4, 246", 246 1/4", 246 1/2", 246 3/4, 248", 248 1/4", 248 1/2", 248 3/4, 250", 250 1/4", 250 1/2", 250 3/4, 252", 252 1/4", 252 1/2", 252 3/4, 254", 254 1/4", 254 1/2", 254 3/4, 256", 256 1/4", 256 1/2", 256 3/4, 258", 258 1/4", 258 1/2", 258 3/4, 260", 260 1/4", 260 1/2", 260 3/4, 262", 262 1/4", 262 1/2", 262 3/4, 264", 264 1/4", 264 1/2", 264 3/4, 266", 266 1/4", 266 1/2", 266 3/4, 268", 268 1/4", 268 1/2", 268 3/4, 270", 270 1/4", 270 1/2", 270 3/4, 272", 272 1/4", 272 1/2", 272 3/4, 274", 274 1/4", 274 1/2", 274 3/4, 276", 276 1/4", 276 1/2", 276 3/4, 278", 278 1/4", 278 1/2", 278 3/4, 280", 280 1/4", 280 1/2", 280 3/4, 282", 282 1/4", 282 1/2", 282 3/4, 284", 284 1/4", 284 1/2", 284 3/4, 286", 286 1/4", 286 1/2", 286 3/4, 288", 288 1/4", 288 1/2", 288 3/4, 290", 290 1/4", 290 1/2", 290 3/4, 292", 292 1/4", 292 1/2", 292 3/4, 294", 294 1/4", 294 1/2", 294 3/4, 296", 296 1/4", 296 1/2", 296 3/4, 298", 298 1/4", 298 1/2", 298 3/4, 300", 300 1/4", 300 1/2", 300 3/4, 302", 302 1/4", 302 1/2", 302 3/4, 304", 304 1/4", 304 1/2", 304 3/4, 306", 306 1/4", 306 1/2", 306 3/4, 308", 308 1/4", 308 1/2", 308 3/4, 310", 310 1/4", 310 1/2", 310 3/4, 312", 312 1/4", 312 1/2", 312 3/4, 314", 314 1/4", 314 1/2", 314 3/4, 316", 316 1/4", 316 1/2", 316 3/4, 318", 318 1/4", 318 1/2", 318 3/4, 320", 320 1/4", 320 1/2", 320 3/4, 322", 322 1/4", 322 1/2", 322 3/4, 324", 324 1/4", 324 1/2", 324 3/4, 326", 326 1/4", 326 1/2", 326 3/4, 328", 328 1/4", 328 1/2", 328 3/4, 330", 330 1/4", 330 1/2", 330 3/4, 332", 332 1/4", 332 1/2", 332 3/4, 334", 334 1/4", 334 1/2", 334 3/4, 336", 336 1/4", 336 1/2", 336 3/4, 338", 338 1/4", 338 1/2", 338 3/4, 340", 340 1/4", 340 1/2", 340 3/4, 342", 342 1/4", 342 1/2", 342 3/4, 344", 344 1/4", 344 1/2", 344 3/4, 346", 346 1/4", 346 1/2", 346 3/4, 348", 348 1/4", 348 1/2", 348 3/4, 350", 350 1/4", 350 1/2", 350 3/4, 352", 352 1/4", 352 1/2", 352 3/4, 354", 354 1/4", 354 1/2", 354 3/4, 356", 356 1/4", 356 1/2", 356 3/4, 358", 358 1/4", 358 1/2", 358 3/4, 360", 360 1/4", 360 1/2", 360 3/4, 362", 362 1/4", 362 1/2", 362 3/4, 364", 364 1/4", 364 1/2", 364 3/4, 366", 366 1/4", 366 1/2", 366 3/4, 368", 368 1/4", 368 1/2", 368 3/4, 370", 370 1/4", 370 1/2", 370 3/4, 372", 372 1/4", 372 1/2", 372 3/4, 374", 374 1/4", 374 1/2", 374 3/4, 376", 376 1/4", 376 1/2", 376 3/4, 378", 378 1/4", 378 1/2", 378 3/4, 380", 380 1/4", 380 1/2", 380 3/4, 382", 382 1/4", 382 1/2", 382 3/4, 384", 384 1/4", 384 1/2", 384 3/4, 386", 386 1/4", 386 1/2", 386 3/4, 388", 388 1/4", 388 1/2", 388 3/4, 390", 390 1/4", 390 1/2", 390 3/4, 392", 392 1/4", 392 1/2", 392 3/4, 394", 394 1/4", 394 1/2", 394 3/4, 396", 396 1/4", 396 1/2", 396 3/4, 398", 398 1/4", 398 1/2", 398 3/4, 400", 400 1/4", 400 1/2", 400 3/4, 402", 402 1/4", 402 1/2", 402 3/4, 404", 404 1/4", 404 1/2", 404 3/4, 406", 406 1/4", 406 1/2", 406 3/4, 408", 408 1/4", 408 1/2", 408 3/4, 410", 410 1/4", 410 1/2", 410 3/4, 412", 412 1/4", 412 1/2", 412 3/4, 414", 414 1/4", 414 1/2", 414 3/4, 416", 416 1/4", 416 1/2", 416 3/4, 418", 418 1/4", 418 1/2", 418 3/4, 420", 420 1/4", 420 1/2", 420 3/4, 422", 422 1/4", 422 1/2", 422 3/4, 424", 424 1/4", 424 1/2", 424 3/4, 426", 426 1/4", 426 1/2", 426 3/4, 428", 428 1/4", 428 1/2", 428 3/4, 430", 430 1/4", 430 1/2", 430 3/4, 432", 432 1/4", 432 1/2", 432 3/4, 434", 434 1/4", 434 1/2", 434 3/4, 436", 436 1/4", 436 1/2", 436 3/4, 438", 438 1/4", 438 1/2", 438 3/4, 440", 440 1/4", 440 1/2", 440 3/4, 442", 442 1/4", 442 1/2", 442 3/4, 444", 444 1/4", 444 1/2", 444 3/4, 446", 446 1/4", 446 1/2", 446 3/4, 448", 448 1/4", 448 1/2", 448 3/4, 450", 450 1/4", 450 1/2", 450 3/4, 452", 452 1/4", 452 1/2", 452 3/4, 454", 454 1/4", 454 1/2", 454 3/4, 456", 456 1/4", 456 1/2", 456 3/4, 458", 458 1/4", 458 1/2", 458 3/4, 460", 460 1/4", 460 1/2", 460 3/4, 462", 462 1/4", 462 1/2", 462 3/4, 464", 464 1/4", 464 1/2", 464 3/4, 466", 466 1/4", 466 1/2", 466 3/4, 468", 468 1/4", 468 1/2", 468 3/4, 470", 470 1/4", 470 1/2", 470 3/4, 472", 472 1/4", 472 1/2", 472 3/4, 474", 474 1/4", 474 1/2", 474 3/4, 476", 476 1/4", 476 1/2", 476 3/4, 478", 478 1/4", 478 1/2", 478 3/4, 480", 480 1/4", 480 1/2", 480 3/4, 482", 482 1/4", 482 1/2", 482 3/4, 484", 484 1/4", 484 1/2", 484 3/4, 486", 486 1/4", 486 1/2", 486 3/4, 488", 488 1/4", 488 1/2", 488 3/4, 490", 490 1/4", 490 1/2", 490 3/4, 492", 492 1/4", 492 1/2", 492 3/4, 494", 494 1/4", 494 1/2", 494 3/4, 496", 496 1/4", 496 1/2", 496 3/4, 498", 498 1/4", 498 1/2", 498 3/4, 500", 500 1/4", 500 1/2", 500 3/4, 502", 502 1/4", 502 1/2", 502 3/4, 504", 504 1/4", 504 1/2", 504 3/4, 506", 506 1/4", 506 1/2", 506 3/4, 508", 508 1/4", 508 1/2", 508 3/4, 510", 510 1/4", 510 1/2", 510 3/4, 512", 512 1/4", 512 1/2", 512 3/4, 514", 514 1/4", 514 1/2", 514 3/4, 516", 516 1/4", 516 1/2", 516 3/4, 518", 518 1/4", 518 1/2", 518 3/4, 520", 520 1/4", 520 1/2", 520 3/4, 522", 522 1/4", 522 1/2", 522 3/4, 524", 524 1/4", 524 1/2", 524 3/4, 526", 526 1/4", 526 1/2", 526 3/4, 528", 528 1/4", 528 1/2", 528 3/4, 530", 530 1/4", 530 1/2", 530 3/4, 532", 532 1/4", 532 1/2", 532 3/4, 534", 534 1/4", 534 1/2", 534 3/4, 536", 536 1/4", 536 1/2", 536 3/4, 538", 538 1/4", 538 1/2", 538 3/4, 540", 540 1/4", 540 1/2", 540 3/4, 542", 542 1/4", 542 1/2", 542 3/4, 544", 544 1/4", 544 1/2", 544 3/4, 546", 546 1/4", 546 1/2", 546 3/4, 548", 548 1/4", 548 1/2", 548 3/4, 550", 550 1/4", 550 1/2", 550 3/4, 552", 552 1/4", 552 1/2", 552 3/4, 554", 554 1/4", 554 1/2", 554 3/4, 556", 556 1/4", 556 1/2", 556 3/4, 558", 558 1/4", 558 1/2", 558 3/4, 560", 560 1/4", 560 1/2", 560 3/4, 562", 562 1/4", 562 1/2", 562 3/4, 564", 564 1/4", 564 1/2", 564 3/4, 566", 566 1/4", 566 1/2", 566 3/4, 568", 568 1/4", 568 1/2", 568 3/4, 570", 570 1/4", 570 1/2", 570 3/4, 572", 572 1/4", 572 1/2", 572 3/4, 574", 574 1/4", 574 1/2", 574 3/4, 576", 576 1/4", 576 1/2", 576 3/4, 578", 578 1/4", 578 1/2", 578 3/4, 580", 580 1/4", 580 1/2", 580 3/4, 582", 582 1/4", 582 1/2", 582 3/4, 584", 584 1/4", 584 1/2", 584 3/4, 586", 586 1/4", 586 1/2", 586 3/4, 588", 588 1/4", 588 1/2", 588 3/4, 590", 590 1/4", 590 1/2", 590 3/4, 592", 592 1/4", 592 1/2", 592 3/4, 594", 594 1/4", 594 1/2", 594 3/4, 596", 596 1/4", 596 1/2", 596 3/4, 598", 598 1/4", 598 1/2", 598 3/4, 600", 600 1/4", 600 1/2", 600 3/4, 602", 602 1/4", 602 1/2", 602 3/4, 604", 604 1/4", 604 1/2", 604 3/4, 606", 606 1/4", 606 1/2", 606 3/4, 608", 608 1/4", 608 1/2", 608 3/4, 610", 610 1/4", 610 1/2", 610 3/4, 612", 612 1/4", 612 1/2", 612 3/4, 614", 614 1/4", 614 1/2", 614 3/4, 616", 616 1/4", 616 1/2", 616 3/4, 618", 618 1/4", 618 1/2", 618 3/4, 620", 620 1/4", 620 1/2", 620 3/4, 622", 622 1/4", 622 1/2", 622 3/4, 624", 624 1/4", 624 1/2", 624 3/4, 626", 626 1/4", 626 1/2", 626 3/4, 628", 628 1/4", 628 1/2", 628 3/4, 630", 630 1/4", 630 1/2", 630 3/4, 632", 632 1/4", 632 1/2", 632 3/4, 634", 634 1/4", 634 1/2", 634 3/4, 636", 636 1/4", 636 1/2", 636 3/4, 638", 638 1/4", 638 1/2", 638 3/4, 640", 640 1/4", 640 1/2", 640 3/4, 642", 642 1/4", 642 1/2", 642 3/4, 644", 644 1/4", 644 1/2", 644 3/4, 646", 646 1/4", 646 1/2", 646 3/4, 648", 648 1/4", 648 1/2", 648 3/4, 650", 650 1/4", 650 1/2", 650 3/4, 652", 652 1/4", 652 1/2", 652 3/4, 654", 654 1/4", 654 1/2", 654 3/4, 656", 656 1/4", 656 1/2", 656 3/4, 658", 658 1/4", 658 1/2", 658 3/4, 660", 660 1/4", 660 1/2", 660 3/4, 662", 662 1/4", 662 1/2", 662 3/4, 664", 664 1/4", 664 1/2", 664 3/4, 666", 666 1/4", 666 1/2", 666 3/4, 668", 668 1/4", 668 1/2", 668 3/4, 670", 670 1/4", 670 1/2", 670 3/4, 672", 672 1/4", 672 1/2", 672 3/4, 674", 674 1/4", 674 1/2", 674 3/4, 676", 676 1/4", 676 1/2", 676 3/4, 678", 678 1/4", 678 1/2", 678 3/4, 680", 680 1/4", 680 1/2", 680 3/4, 682", 682 1/4", 682 1/2", 682 3/4, 684", 684 1/4", 684 1/2", 684 3/4, 686", 686 1/4", 686 1/2", 686 3/4, 688", 688 1/4", 688 1/2", 688 3/4, 690", 690 1/4", 690 1/2", 690 3/4, 692", 692 1/4", 692 1/2", 692 3/4, 694", 694 1/4", 694 1/2", 694 3/4, 696", 696 1/4", 696 1/2", 696 3/4, 698", 698 1/4", 698 1/2", 698 3/4, 700", 700 1/4", 700 1/2", 700 3/4, 702", 702 1/4", 702 1/2", 702 3/4, 704", 704 1/4", 704 1/2", 704 3/4, 706", 706 1/4", 706 1/2", 706 3/4, 708", 708 1/4", 708 1/2", 708 3/4, 710", 710 1/4", 710 1/2", 710 3/4, 712", 712 1/4", 712 1/2", 712 3/4, 714", 714 1/4", 714 1/2", 714 3/4, 716", 716 1/4", 716 1/2", 716 3/4, 718", 718 1/4", 718 1/2", 718 3/4, 720", 720 1/4", 720 1/2", 720 3/4, 722", 722 1/4", 722 1/2", 722 3/4, 724", 724 1/4", 724 1/2", 724 3/4, 726", 726 1/4", 726 1/2", 726 3/4, 728", 728 1/4", 728 1/2", 728 3/4, 730", 730 1/4", 730 1/2", 730 3/4, 732", 732 1/4", 732 1/2", 732 3/4, 734", 734 1/4", 734 1/2", 734 3/4, 736", 736 1/4", 736 1/2", 736 3/4, 738", 738 1/4", 738 1/2", 738 3/4, 740", 740 1/4", 740 1/2", 740 3/4, 742", 742 1/4", 742 1/2", 742 3/4, 744", 744 1/4", 744 1/2", 744 3/4, 746", 746 1/4", 746 1/2", 746 3/4, 748", 748 1/4", 748 1/2", 748 3/4, 750", 750 1/4", 750 1/2", 750 3/4, 752", 752 1/4", 752



MORE THAN 400,000 ITEMS ONLINE

**PORTER CABLE**

**Portable Electric Air Compressors**

Motor starts easily in cold weather. upgraded shroud has rugged carry handle. Oil-free. Pancake tank. 0.8HP electric motor. 115 VAC. 10 AAC. ¼" FNPT outlet.

**6 Gallon Tank**  
Plated steel cylinder. UMC motor. Features two couplers. 150 psi (max). 18½" w x 18" d x 15" h.  
■ ISO STANDARDS  
G1842574 **\$181.57**



**4 Gallon Tank**  
Aluminum cylinder. Low-amp motor. Includes a ¼" x 25' polyurethane air hose with coupler. 165 psi (max). 15" w x 15½" d x 17" h.  
■ ETL STANDARDS  
G1118984 **\$219.53**



WORKS GREAT UNDER PRESSURE!

**PHOENIX Portable Electric Air Compressor**

Portable 12VDC oil-free air compressor features a 100% duty cycle. Motor turns on when pressure falls below an adjustable predetermined psi setting, maintaining constant air pressure and allowing continual use. Includes vibration dampening feet, control pressure box and ball drain valve. 3 gal horizontal tank. ¾ HP universal motor. 120 psi (max). ¼" FNPT outlet. 8½" w x 21½" d x 18" h. ■ UL STANDARDS  
G4154071 **\$409.33**



**THOMAS Ultra Air-Pac Portable Electric Air Compressor**

Compressor features a 0.5 HP thermally protected induction motor with oil-free lubrication. 2gal hot dog tank. Aluminum cylinder. 115VAC. 125 psi (max). ¼" FNPT outlet. 8" w x 16½" d x 15½" h.  
■ UL, CSA STANDARDS  
G2426015 **\$499.99**

**VALUE BRAND Portable Electric Air Compressor**

Oil-free tankless air compressor is ideal for home and workshop use. Tankless design and easy-grip handle eases portability. Motor has automatic overload protection. Die-cast aluminum cylinder. Comes equipped with regulator, ¼" x 6' hose, quick-connect plug, pressure gauge, chuck and manifold. 0.9HP induction motor. 115 VAC. 5 A. 115 psi (max). ¼" FNPT outlet. 9½" w x 15¾" d x 14¼" h. ■ UL, CSA STANDARDS  
G4862374 **\$126.27**



**THOMAS Oil-Less Piston Air Compressor**

Unit features rugged flexible piston cup and shaded-pole motor with automatic thermal protection and high-torque start windings. Corrosion-resistant sandwich valve stops foreign particles from lodging on valve seats. Aluminum cylinder, cylinder heads and pistons. Continuous-duty rated. Quiet running—63 dBA at 60 psi. ¼ HP permanent magnet motor. 12 VDC. 10.5 A. ½" NPT inlet/outlet. 4¼" w x 7½" d x 5½" h.  
G0626832 **\$349.99**



**INGERSOLL-RAND All Season Select Compressor Oil**

Synthetic-based lubricant is ideal for high- and low-temperature applications. For use with single- and two-stage reciprocating air compressors. 1qt bottle.  
G2911063 **\$11.99**



**INGERSOLL-RAND Tank-Mounted Electric Air Compressor**

Single-stage air compressor is engineered for 100% continuous duty. Features a hardened-steel crank shaft with precision bearings. Splash lubrication. 60 gal vertical tank. Must be hardwired. 3HP. 230 V. 14.7 A. 135 psi (max). ½" FNPT outlet. 23" w x 20" d x 66" h.  
■ OSHA, UL, CSA, ASME STANDARDS  
G1775776 **\$647.99**



**Start-Up Kit G1179437 \$35.99**

start-up kit includes: All Season Select lubricant, inlet air filters for the compressor pump; manufacturer's engine oil, air filter, oil filter



**INGERSOLL-RAND Stationary Air Compressor**

Heavy-duty, cast-iron compressor features a corrosion-resistant powder-coated finish. Continuous-duty 13HP Honda gas engine. 30 gal cast-iron tank. Electric starter, alternator. Automatic pilot valve control. 175 psi (max). ½" FNPT outlet. 33" w x 57" d x 44" h. ■ CA EMISSION STANDARDS  
G2839076 **\$2699.99**

**Start-Up Kit G2257123 \$170.41**

start-up kit includes: All Season Select lubricant and inlet air filters for the compressor pump; manufacturer's engine oil, air filter, oil filter





### VALUE BRAND Air Hoses

General-duty rubber hoses are constructed with a nitrile oil-resistant tube and cover. Multipurpose hoses are suitable for use with air, water and mild chemicals. Hose is non-conductive. Brass couplers on ends.

4:1 safety factor. -20° to 190°F. ■ RMA STANDARDS

► MORE SIZES ONLINE

#### Red Hoses


250 psi (max). 3/8" inner diameter.

G1923686	1/4" NPT (25' length)	<b>\$19.99</b>
G0536891	1/4" NPT (50' length)	<b>\$35.99</b>
G1508516	3/8" NPT (25' length)	<b>\$21.99</b>
G0737606	3/8" NPT (50' length)	<b>\$36.99</b>

#### Heavy-Duty General-Purpose Yellow Hose

300 psi (max). 3/8" inner diameter.

G1649024	3/8" NPT (50' length)	<b>\$44.94</b>
----------	-----------------------	----------------



### VALUE BRAND Coiled Air Hoses

Nylon recoil hose has a high resistance to oil, grease and moisture absorption. Highly visible in a safety yellow color, hoses feature a smooth, high-gloss surface. Coil spring guards on both ends with male rigid by male swivel connections. -40° to 176°F.

Q#	NPT	length	usable	psi	price
G3262682	3/4"	12'	9'	185	<b>\$10.99</b>
G1414007	3/4"	25'	18'	185	<b>\$15.99</b>
G2497406	3/8"	12'	10'	165	<b>\$19.99</b>
G0363246	3/8"	25'	18'	165	<b>\$33.99</b>
G1360274	1/2"	12'	9'	170	<b>\$33.99</b>
G3194475	1/2"	25'	18'	170	<b>\$49.99</b>



### REELCRAFT Premium Industrial Hose Reel

Compact design and all-steel construction allows use in a wide range of applications with critical space requirements. Versatile reel is easily mounted on wall, floor, ceiling or truck. Features permanently lubricated bearings and swivels, self-locking latch, spring return drive and corrosion-resistant powder-coated finish. Includes 50' PVC hose—1/4" NPT x 3/8" NPT ends. 3/8" FPNT reel inlet. 300 psi (max). 16 1/2" length. 17 1/2" height.

G1496363	<b>\$239.99</b>
----------	-----------------

### VALUE BRAND Non-Coded Air Tank

Hotdog-style tank is constructed of 14-gauge steel with a green metallic finish. Formed, one-piece steel strap feet provide maximum stability. Features both 1/4" and 1/2" NPT ports along with a 1/4" drain port. 3 gal tank. 1HP. 125 psi. 8 1/4" w x 25 1/4" d x 8 3/4" h.

G0621442	<b>\$98.78</b>
----------	----------------



### VALUE BRAND Portable Air Tank

Air-carry tank is used for inflating or in combination with recoil hose and air gun. Includes 3' hose with adapter, 0 to 160 psi pressure gauge, brass manifold with shutoff and safety valves. 13-gauge steel construction with green powder-coated finish. 5 gal tank. 125 psi (max). 10" w x 16" d x 12" h.

G2405277	<b>\$34.99</b>
----------	----------------

### VALUE BRAND Straight Hose Barbs

Hose barbs provide fast, easy hookup for bulk hose pipe thread fittings. For use in low-pressure pneumatic and water applications. Crimped or hose clamp. Brass construction. 3/8" barb size. 300 psi.



G2969626	1/4" NPT (3/16" hex head)	<b>\$0.79</b>
G1727135	1/4" FNPT (13/16" hex head)	<b>\$1.09</b>
G0633787	3/8" NPT (13/16" hex head)	<b>\$0.99</b>
G2942091	3/8" FNPT (13/16" hex head)	<b>\$1.49</b>



### VALUE BRAND Small Air Receivers

Designed for point-of-use air storage. Stationary, steel horizontal tanks are excellent for providing compressed air to short, peak-demand applications. Tanks feature multiple openings and NPT thread sizes. Plugs are included in all openings. Black powder-coated finish. 175 psi (max).

#### 3 Gallon Tank

6" w x 25" d x 8" h

G1833921	<b>\$189.59</b>
----------	-----------------

#### 10 Gallon Tank

12" w x 24 1/2" d x 14" h

G0901731	<b>\$262.01</b>
----------	-----------------

### VALUE BRAND Stationary Air Tank

Vertical tank meets city and state requirements for most commercial and industrial installations. Steel construction. 60 gal capacity. 200 psi (max). 20" diameter. 52" height. 35.8" shell.

■ ASME STANDARDS

G2587532	<b>\$658.88</b>
----------	-----------------



### VALUE BRAND Coupler Plugs and Bodies

Industrial interchange couplers and bodies are constructed of zinc-plated steel and feature NBR seals. 1/4" body. 300 psi (max).

#### Coupler Plugs

Plugs are used on the end of a hose or tool inlet for connection to quick coupler.

■ ISO, MIL STANDARDS

G4869216	1/4" NPT	each	<b>\$0.79</b>
G4869191	1/4" FNPT		

#### Coupler Bodies

Bodies are used on the end of a hose or air supply for connection to hose or tool. 35 cfm (max).

G4869356	1/4" NPT	each	<b>\$2.99</b>
G4882814	1/4" FNPT		



### IDEAL 68 Series Hose Clamps

Industrial-strength hose clamps feature no spot welds or staking. High-torque standard clamps are suitable for industrial sealing applications. Interlocked design resists rupture and shearing. 1/16" 201/301 stainless steel band features a 1/16" 410 stainless steel hex-head screw.

G1311791	SAE #6 (3/8" to 1/2" clamp diameter)	10-pack	<b>\$5.79</b>
G3357541	SAE #10 (1/2" to 1 1/8" clamp diameter)		





**CENTURY Air Compressor Motor**

Mechanical features provide long life in high-tension, belt-type loads, which typically shorten motor life. High breakdown torque ensures dependable service. Direct replacements for selected air compressors including Dayton, Speedaire, Ingersoll-Rand, Campbell Hausfeld, Sanborn, Champion, Coleman, Quincy and others. Open drip-proof enclosure with rigid welded base for mounting. 5HP capacitor-start motor. Single phase. 230 V. 22 A. 2350 to 3600 rpm. 7/8" x 2 1/4" shaft.

■ UL, CSA STANDARDS  
G2752136 **\$260.99**



**GAST Rotary Vane Air Motor**

Motor operates in wet and corrosive environments and in extreme temperatures up to 250°F. With no heat build-up or electric sparking, air motors are an excellent alternative in applications that would normally require expensive explosion-proof motors. Output speed and torque are adjustable with use of air regulator valve placed between air source and air motor. Requires little maintenance—vanes are self-sealing and self-adjusting. Cast-iron construction. Discharge muffler included. 1.8 HP. 75 cfm. 100 psi (max). 3/16" x 3/16" x 1/2" keyway. 4.31" w x 6.56" d x 3.96" h.

G2816737 **\$207.02**



**GAST Rotary Vane Compressor and Vacuum Pump**

For use in general continuous-duty vacuum and low-pressure applications. Features integral mufflers and filters, as well as international multi-voltage, dual-frequency motor. Single-phase unit has thermal overload protection. Mounts directly to 56C frame motors. Oil-less design. Permanently lubricated and sealed bearings. Self adjusting, self-lubricating vanes. 3/4 HP. 115/230 V. 10 cfm @ 0 psi. 1725 rpm. 3/8" NPT inlet/outlet. 6.5" w x 15.94" d x 8.34" h.

■ CSA STANDARDS  
G2484045 **\$669.99**



**GAST Diaphragm Compressor and Vacuum Pump**

Permanently lubricated, virtually maintenance-free unit offers the versatility of reversible 1/4" inlet and outlet ports. Pressure or vacuum without modification. Quiet operation. 1/2 HP. 115 V. 1.1 cfm @ 0 psi. 5 1/2" w x 7 1/2" d x 7 1/16" h.

G1860293 **\$257.99**



**VALUE BRAND Pneumatic Exhaust Mufflers**

Muffler filters reduce exhaust noise levels to acceptable levels. Features a 40 micron porous sintered bronze element. Nickel-plated steel fitting. 300 psi (max). 35° to 300°F.

■ OSHA STANDARDS

- G2437285 3/8" NPT port (7/16" hex) **\$1.67**
- G1066791 1/4" NPT port (3/16" hex) **\$2.06**
- G0628704 3/8" NPT port (13/16" hex) **\$2.78**
- G1298866 1/2" NPT port (7/8" hex) **\$2.95**




**WILKERSON Automatic Drain Valves**

Pneumatic-operated drain valves automatically drain condensed water and oil from a compressed air system. For use with compressors up to 100 HP.

**X51 External Piston Drain**

3/8" NPT inlet. 1/4" drain outlet. 30 to 200 psi.

G2634651 **\$54.99**



**XB3 External Drain**

Override feature allows manual operation. Zinc enclosure. 1/2" NPT inlet. 1/8" drain outlet. 20 to 200 psi.

G3014785 **\$69.89**



**VALUE BRAND Modular Pressure Regulators**

Air pressure regulators are self-relieving, high capacity, heavy-duty units designed for commercial/industrial applications. These regulators provide high flow with minimum pressure drop. Balanced design offers accurate pressure control. Full flow gauge ports. 300 psi (max).

- Miniature**
- G1800976 3/8" NPT (14 cfm) **\$8.99**
- G0700271 1/4" NPT (15 cfm) **\$8.99**

- Intermediate**
- G1642067 1/2" NPT (60 cfm) **\$26.40**

- Standard**
- G1220152 1/2" NPT (100 cfm) **\$27.99**

- Heavy Duty**
- G1094852 1" NPT (480 cfm) **\$77.48**

**INGERSOLL-RAND/ARO Air Line Flow Control Valves**

Glass-reinforced thermoplastic valves provide free flow in one direction and controlled flow in opposite direction. Control features a color-coded micrometer and calibrated adjustment knob. Ring lock keeps adjustment from accidentally moving. Zinc-plated steel pipe port inserts. Panel mount nut included. 0° to 200°F. 200 psi (max).

- G2722675 3/8" NPT inlet/outlet **\$18.99**
- G0673215 1/4" NPT inlet/outlet **\$15.49**
- G0853106 3/8" NPT inlet/outlet **\$21.40**
- G2072375 1/2" NPT inlet/outlet **\$19.49**



**WILKERSON Desiccant Air Driers**

Ideal for drying small volumes of air at the point of use. Protects branch lines exposed to temperatures below freezing. For use on air tools, instruments and paint spraying equipment. Convenient in-line mounting saves space. Premeasured silica gel desiccant packaged in convenient, easy-to-use bags for less waste. Polycarbonate bowl. 1/4" FNPT inlet. 1/4" NPT outlet. 150 psi (max). 125°F (max). ISO Class 2.

**X06 Desiccant Dryer**

1/4 lb bowl. 600 cu-ft capacity. 5 cfm. 3" w x 3" d x 6 1/2" h.

- G0641864 dryer **\$49.89**
- G1477016 desiccant 3-pack **\$28.27**

**X03 Desiccant Dryer**

1 1/4 lb bowl. 11,000 cu-ft capacity. 10 cfm. 4 1/8" w x 4 3/4" d x 13 3/4" h.

- G0780071 dryer **\$108.99**
- G3484503 desiccant 4-pack **\$189.99**



**WILKERSON 08 Series Miniature Modular Air Preparation System**

Two-piece design integrates filter/regulator and lubricator. Ready-to-mount assemblies come with a pressure gauge and modulator T-bracket/joiner assembly. 0.6 oz polycarbonate bowl. 5 micron filter rating. Replacement filter elements available online. 1/4" NPT. 150 psi. 44 cfm. 125°F (max). 3.15" height. 6.46" height.

G2927951 **\$35.99**



**WILKERSON 28 Series Standard Modular Air Preparation System**

Three-piece design integrates filter, regulator and lubricator into a single unit. Ready-to-mount assemblies come with a pressure gauge and modulator T-bracket/joiner assembly. 6.1 oz polycarbonate bowl. 5 micron filter rating. Replacement filter elements available online. 1/2" NPT. 150 psi. 100 cfm. 125°F (max). 9.32" width. 9.36" height.

G2062977 **\$179.99**

**INGERSOLL-RAND/ARO Solenoid Air Control Valves**

Compact body-ported alpha valves are 4-way and 2-position. They can be operated without air line lubrication. For use with air or inert gas.. Up to 600 cycles per minute. Solenoid actuator. Spring return. NEMA 4 coil connectors are required. 50 to 150 psi. 0° to 180°F

- No Coil—1/4" Port**
- 50 cfm. 1.5 Cv.
- 1 1/8" w x 2 1/8" d x 3 1/4" h.
- G1245982 **\$54.24**

- 120 VAC Coil—1/4" Port**
- 50 cfm. 1.5 Cv.
- 1 1/8" w x 3 1/8" d x 3 1/4" h.
- G0651612 **\$55.99**


- 120 VAC Coil—3/8" Port**
- 61 cfm. 1.7 Cv.
- 2 1/2" w x 3 1/2" d x 3 5/8" h.
- G1510695 **\$93.65**





**PTFE SEALANT TAPES**  
ON PAGE 141

- G0713361 low density
- G0426176 med density
- G1610655 med density
- G2651555 high density

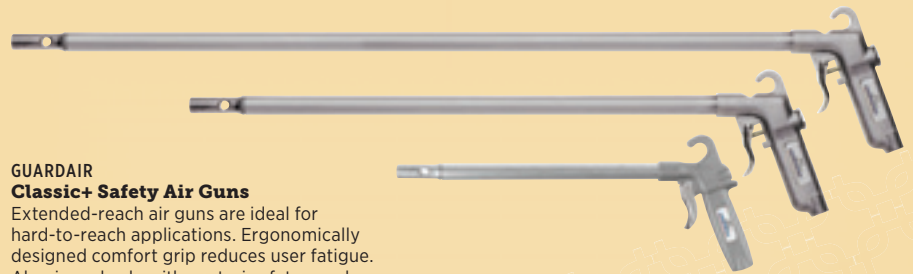

**GUARDAIR**  
**Classic+ Safety Air Guns**

Extended-reach air guns are ideal for hard-to-reach applications. Ergonomically designed comfort grip reduces user fatigue. Aluminum body with venturi safety nozzle. 1/4" FNPT inlet. 1/8" FNPT outlet. 150psi (max).

■ OSHA STANDARDS

- G1004516 16" overall (12" extension) **\$22.04**
- G1225253 28" overall (24" extension) **\$28.33**
- G3326154 40" overall (36" extension) **\$27.53**

**VALUE BRAND Spring Retainer**

Beehive-style retainer for use with 0.401" shank pneumatic hammers—fits Dayton, Chicago Pneumatic, UT and Raider.



G1372856 **\$5.95**



**VALUE BRAND**  
**Flat Rivet Chisel**

Rivet hammer chisel features a 0.401" round shank and collar. Alloy steel construction. 3/4" tip width. 6 1/2" length.

G2739825 **\$7.92**

**VALUE BRAND**  
**Manual Rivet Clinchers**

Lightly hammer the top of the tool to set tubular and semi-tubular rivets. Rivet clincher tools can be adapted to an arbor or drill press. For low-volume riveting of tubular rivets. Steel construction.



- G2887814 for 1/8" rivets
  - G0394992 for 3/16" rivets
- each **\$33.14**

**LEGACY**  
**Air Gun Needle Nozzle Kit**

Features stainless steel construction with 1/8" NPT inlets. For use with Lazer Series air guns.

G1605362 kit **\$3.79**  
kit includes: 1", (2) 2", 3" needles



**LEGACY Air Gun Swivel**  
Unit swivels between tool and air supply. Aluminum and steel construction. 1/4" FNPT inlet. 1/4" NPT outlet.

G1832144 **\$9.16**


**VALUE BRAND Air Gun Kit**

Kit features two air guns, includes tips and comes in a blow-molded case.

G1511501 kit **\$40.32**

kit includes: metal and plastic air guns with quick-change adapter, safety booster tip, 1/4" industrial male plug, inflating tip, siphon tip, plastic tip, rubber tip, 2" needle tip, 3" needle tip, 4" needle tip, 6" safety extension nozzle

13  
PIECE

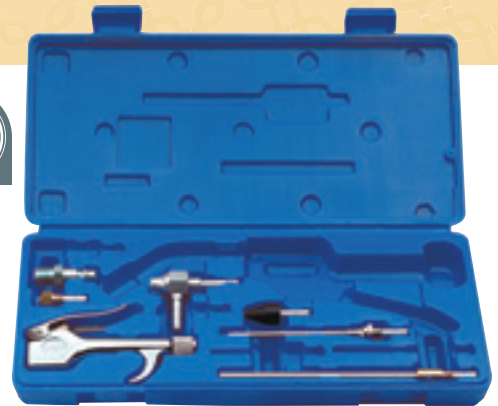

6  
PIECE

**BRECO**  
**Quick-Change Air Gun Kit**

Kit comes in a clear vinyl storage pouch. 1/4" FNPT inlet. 1/8" FNPT outlet. 150psi inlet pressure (max).

G2995921 kit **\$25.99**  
kit includes: heavy-duty air gun, high-flow safety nozzle, 6" extension safety nozzle, rubber tip nozzle, needle tip nozzle, air screen safety nozzle



**BRECO Air Gun**

In-line air gun features a safety nozzle, lever trigger and nickel-plated zinc body. For use in cleaning and drying applications. 1/4" FNPT inlet. 1/8" FNPT outlet. 150psi inlet (max). 95psi output. 1/2" extension. 5 1/4" overall length.

■ OSHA STANDARDS

G2934364 **\$5.59**



**LEGACY**  
**Pistol Grip Air Guns**

Air guns feature a safety nozzle, lever trigger and hanging hook. Nylon body. 1/4" FNPT inlet. 1/8" FNPT outlet. 120psi inlet (max). 90psi output.

- G0482501 7 1/2" overall (1 1/2" nozzle) **\$7.12**
- G1204271 17" overall (12" extension) **\$11.99**







**INGERSOLL-RAND Air Impact Wrenches**

General-duty wrenches are best for automotive, basic maintenance and light production applications. These wrenches feature a twin-hammer mechanism, a hard coat anodized end plate and optimized air flow. Titanium housing with a composite pistol-grip handle. 1/2" square drive. 3/16" bolt capacity (max). 50 to 550 ft-lb torque. 780 ft-lb torque (max). 9800rpm free speed. 5 cfm average (15sec run time). 24 cfm (full load). 1/4" NPT air inlet.



G1278331 general duty **\$298.00**  
G0974741 industrial duty **\$312.00**



**VALUE BRAND Air Impact Wrench**

Light-duty impact wrench is ideal for automotive, basic maintenance and light production applications. Butterfly throttle on in-line unit allows one-handed forward and reverse control. 3/8" square drive. 3/8" bolt capacity (max). 5 to 50 ft-lb torque range. 75 ft-lb torque (max). 4 cfm average (15sec run time). 16 cfm (full load). 90psi (required). 1/4" NPT inlet. 3/8" hose (min).

G3294986 **\$69.95**




11  
PIECE

**CRAFTSMAN INDUSTRIAL Impact Socket Set**

6 pt deep SAE sockets feature a 1/2" drive, hex connection and a black oxide finish.

G2544997 11-piece set **\$64.99**  
set includes: 1/8", 1/4", 3/8", 1/2", 5/8", 3/4", 7/8", 1", 1 1/8"

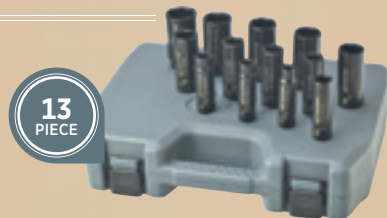

13  
PIECE

**INGERSOLL-RAND Impact Socket Set**

Socket set is designed to withstand the high impacting torque loads that modern impact wrenches produce. Impact sockets are heat treated to a lower hardness than hand or power sockets to ensure durability for impact applications. 6 pt deep SAE sockets feature a 1/2" drive, hex connection and an electro-phosphate finish. Includes a blow-molded carrying case.

G0341135 13-piece set **\$54.85**  
set includes: 1/8", 1/4", 3/8", 1/2", 5/8", 3/4", 7/8", 1", 1 1/8", 1 1/4"

**INGERSOLL-RAND Air Ratchet Wrenches**

Ratchets feature ball detent for easy socket change. Lever throttle for variable speed control. Ball and needle bearing construction. Reversible operation. 3/8" square drive. 4cfm @ 15sec run time. 90psi (required). 1/4" NPT inlet. 3/8" hose (min).



**General Duty**

Lever throttle. Adjustable exhaust. 10 to 45ft-lb torque. 45ft-lb torque (max). 160rpm free speed. 4 cfm average (15sec run time). 18 cfm (full load).

G1287081 **\$90.02**



**Industrial Duty**

Trigger throttle. Front exhaust. 10 to 60ft-lb torque. 65ft-lb torque (max). 200rpm free speed. 4 cfm average (15sec run time). 23 cfm (full load).

G1558882 **\$145.89**

**INGERSOLL-RAND Pneumatic Screwdriver**

Standard-duty air screwdriver with positive-jaw clutch is perfect for use with soft-draw applications. Variable-speed trigger throttle. Reversible operation. Pistol-grip handle with through-handle exhaust. 1/4" quick-change bit holder included. 47.1 to 115 in-lb torque. 1800 rpm free speed. 4 cfm average (15sec run time). 29 cfm (full load). 90 psi (required). 1/4" air inlet. 3/8" hose (min).

G1643537 **\$111.28**



**INGERSOLL-RAND Inline Pneumatic Screwdrivers**

Adjustable cushion clutch controls torque output to the bit. Straight handle units come with suspension bails. 1/4" quick-change bit holder included. Reversible operation. 1000rpm free speed. 90psi (required). 1/4" hose (min).

**1 Series Inline**

Push-to-start throttle. 2.7 to 30.1in-lb torque. 2cfm average (15sec run time). 13 cfm (full load). 1/2" NPT inlet.

G0627462 **\$479.99**



**5 Series Inline**

Lever throttle. 13 to 75 in-lb torque. 2cfm average (15sec run time). 16 cfm (full load). 1/2" NPT inlet.

G1918594 **\$430.99**



**CHICAGO PNEUMATIC Air Drills**

Air drills feature aluminum housing, rubber pistol grip, trigger throttle and a 3/8" keyed chuck. Reversible operation. 90psi (required). 1/4" NPT inlet. 3/8" hose (min).



**General Duty**

1/2HP. 2000 rpm free speed. 6 cfm average (15 sec run time). 24 cfm (full load).

G3666704 **\$106.99**

**Industrial Duty**

1/2HP. 4200rpm free speed. 7.5 cfm average (15sec run time). 30 cfm (full load).

G3673153 **\$191.99**



**VALUE BRAND Air Hammer**

Designed for general-duty use in automotive, maintenance or light construction applications. Ideal for chipping, scraping, sheet metal cutting, light vehicle exhaust work and rivet or joint removal/separation. Includes 0.401" shank chisels (4) and a spring retainer. 3.6 cfm average (15sec run time). 13.5 cfm (full load). 3600 blows per minute. 90psi (required). 1/4" NPT inlet. 3/8" hose (min).

G0372233 **\$33.99**



**VALUE BRAND Industrial Air Chipping Hammer**

Ideal for heavy-duty cutting, chipping, and scraping. Features a chisel retainer, a quick-change retainer spring to easily change tools and a variable-speed trigger. 0.68" round shank. 2400 blows per minute. 4" stroke. 6 cfm average (15sec run time). 24 cfm (full load). 90 psi. 3/8" air inlet. 3/8" hose (min). 14 3/8" overall length.

G2423951 **\$368.78**




**VALUE BRAND Air Riveter**

General-duty pneumatic riveter is designed to set uniform rivets in any position. Two-piece jaw system increases jaw traction. Aluminum construction. 1940 lb pulling force. 0.551" stroke. 0.55 cfm per stroke. 90psi (max). 1/4" NPT inlet. 3/8" hose (min). Includes nosepieces (3/32", 1/8", 5/32", 3/16") and spanner.

G3022966 **\$84.59**



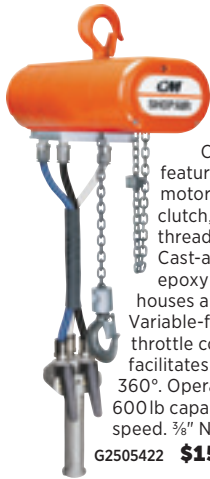

### CM SHOPAIR Chain Hoist

Compact air chain hoist features a 2-reduction gearing motor, standard overload clutch, friction disc brake and threaded external exhaust. Cast-aluminum alloy frame with epoxy powder-coated finish houses a 10-pocket liftwheel. Variable-flow, 2-lever pendant throttle control. Latch-type hook facilitates load spotting and swivels 360°. Operates on 34 cfm at 90 psi. 600 lb capacity. 10' lift. 0 to 16 fpm lift speed. 3/8" NPT inlet.

G2505422 **\$1599.99**

### VALUE BRAND Air Pencil Grinder

General-duty, lightweight, high-speed design includes 1/8" precision collet and 5' air hose with integrated rear exhaust. Aluminum housing with twist throttle. Variable-speed control. 0.1HP. 70,000 rpm free speed. 1 cfm average (15 sec run time). 7 cfm (full load). 90 psi (required). 1/4" NPT inlet. 1/4" hose (min). Includes wrenches (2).

G3082353 **\$90.83**



### CHICAGO PNEUMATIC Air Pencil Grinder

General-duty pencil grinder features composite housing with twist throttle, rear exhaust and 1/8" collet. Variable-speed control. 0.05HP. 60,000 rpm free speed. 1.8 cfm average (15 sec run time). 7 cfm (full load). 90 psi (required). 1/4" NPT inlet. 3/8" hose (min). Includes 5' whip hose (1/4" ID).

G3650367 **\$90.99**



### INGERSOLL-RAND Air Pencil Grinder

Industrial-duty pencil grinder can use either carbide burs or mounted grinding wheels. Steel housing with slide throttle, front exhaust and 1/8" collet. 0.1HP. 60,000 rpm free speed. 1.5 cfm average (15 sec run time). 6 cfm (full load). 90 psi. 1/4" NPT inlet. 1/4" hose (min). Includes 7' whip hose (3/16" ID).

G2454085 **\$289.99**



### INGERSOLL-RAND Air Tool 10W Oil

For use with percussive, assembly and impact wrenches. 4 oz bottle.

G1369636 **\$3.45**



### INGERSOLL-RAND Air Tool 50W Oil

For use with grinders, impact wrenches, hoists and winches. 1pt bottle.

G3238496 **\$6.78**



### VALUE BRAND Pneumatic Random Orbital Sander

Composite housing with an aluminum handle and trigger throttle. PSA pad face. Includes backing disks (3", 4 1/2", 5 1/2"). 7/8" arbor hole. Variable speed. 18,000 rpm free speed. 90 psi (required). 1/4" NPT inlet. 3/8" hose (min).

G1461494 **\$39.95**



### CHICAGO PNEUMATIC Air Die Grinder

Right-angle die grinder can use either carbide burs or mounted grinding stones. Compact and flexible design features aluminum handle, 1/4" collet, lever throttle and rear exhaust. Includes wrenches. 0.3HP. 22,500 rpm free speed. 5.5 cfm average (15 sec run time). 22 cfm (full load). 90 psi (required). 1/4" NPT inlet. 1/4" hose (min).

G3712965 **\$64.19**



### VALUE BRAND Straight Air Die Grinder

General-duty straight die grinder can use either carbide burs or mounted grinding stones. Features energy efficient 1/2HP motor, 1/4" collet, lever throttle and rear exhaust. Includes spanner wrenches (2). 22,000 rpm free speed. 90 psi (required). 1/4" NPT inlet. 3/8" hose (min).

G1412591 **\$39.99**



### VALUE BRAND Air Cut-Off Tools

Light-duty cut-off tools feature a guard that can be rotated 360°, safety lock-off lever and rear exhaust. Variable speed. For use with 3" wheel with 3/8" arbor hole and 1/16" maximum thickness. 0.5HP. 22,000 rpm free speed. 90 psi (required). 1/4" NPT inlet. 3/8" hose (min).

G1901776 kit **\$69.95**

Kit includes: cut-off tool, cut-off wheels (8), plastic case

G1237196 tool only **\$54.95**



### INGERSOLL-RAND Air Nibbler

General-duty air nibbler is for use in automotive repair or industry applications. Aluminum housing with a lever throttle control. 3200 strokes per minute. 4 cfm average (15 sec run time). 17 cfm (full load). 90 psi. 1/4" NPT inlet. 3/8" hose (min).

G3239555 **\$99.99**



### CAULK MASTER Pneumatic Caulk Gun

Air-operated caulking gun for use with a 10 oz cartridges. Use with low and medium viscosity materials like sealants, caulk and adhesives. High-impact plastic barrel with twist-lock retainer and pistol grip. 0 to 70 psi. 1/4" NPT inlet. 3' hose.

G0894397 **\$42.99**



### STANLEY BOSTITCH Air Roofing Stapler

Stapler features a jam-free magazine, adjustable depth control, rubber grip, rear exhaust and shingle gauge for conveniently spacing shingles. Aluminum housing. Contact firing mode. 0.022 cfm per shot. 160-capacity magazine. For 1/2" to 1 1/2" leg length. 70 to 100 psi. 1/4" NPT inlet.

G3380946 **\$365.99**



### STANLEY BOSTITCH Pneumatic Construction Stapler

Stapler includes jam-free magazine, adjustable depth control, rubber grip and adjustable exhaust. Aluminum housing. Contact firing mode. 0.028 cfm per shot. 160-capacity magazine. 1" to 2" leg length. 70 to 100 psi. 1/4" NPT inlet.

G3191185 **\$482.99**

### STANLEY BOSTITCH Staples

16-gauge staples with 1" crown. Chisel point. 1 1/2" length.

G2587611 75,000-pack **\$49.90**



### STANLEY BOSTITCH Staples

16-gauge staples with 1/2" crown.

G2237094 1 1/2" length 14,250-pack **\$86.99**

G2910713 1 3/4" length 11,400-pack **\$85.99**

G1233766 2" length 11,400-pack **\$94.99**







**ENERPAC Hydraulic Lifting Set**  
Premium pump-and-cylinder set contains necessary components for lifting, spreading, pulling, pushing and holding. Includes multiple cylinders of the same tonnage. 10,000 psi working pressure (max). 0.63" to 6" stroke. 10 ton capacity.

**G2883395** 13-piece set **\$2779.95**  
set includes: hand pump, 6' hose, gauge, gauge adapter, fitting, coupler set, baseplate, 1 ton spreader, oil, cylinders (Flat-Jac, low height, hollow, single-acting)

**13**  
PIECE

**ENERPAC Hydraulic Quick-Connect Coupler Set**

Poppet-style coupler set features male and female coupler halves with crimped seal retention. Zinc-finished steel body with steel sleeve locking mechanism. 10,000 psi working pressure (max). 10.8 gpm (max).

**G3493253** set **\$54.99**  
set includes: 3/8" male and female couplers, 2-in-1 dust cap



**EATON AEROQUIP High-Pressure Hydraulic Hose Assembly**

Hose features dust caps and a synthetic rubber coating over a double layer of braided steel wire. For use with 10,000 psi pumps and cylinders. 10,000 psi working pressure (max). 1/4" inner diameter. 3/8" NPT x 3/8" male quick-coupler. 10' length.

**G2599502** **\$91.29**



**ENERPAC Single-Acting Hydraulic Cylinders**

Designed for general lifting purposes. Cylinders feature a spring return and mount in any position—mounting holes in base. Cylinders include a 3/8" female coupler, collar thread protector and hardened removable grooved saddle. Steel construction.

**Flat Jac Cylinder**  
20 ton capacity. 0.44" stroke. 1.94 cu-in oil capacity. 2.03" retracted. 2" plunger diameter.  
**G1853582** **\$549.95**

**Low-Height Cylinder**  
10 ton capacity. 1.5" stroke. 3.35 cu-in oil capacity. 3.47" retracted. 1.5" plunger diameter.  
**G1082067** **\$309.95**

**Standard Steel Cylinder**  
10 ton capacity. 2.13" stroke. 4.75 cu-in oil capacity. 4.78" retracted. 1.5" plunger diameter. 3/8"-18 thread size.  
**G0641645** **\$244.95**



**ENERPAC Premium Hydraulic Hand Pump Oil**

Medium viscosity index improves flow properties, especially in lower temperatures. Formulated specifically for use with Enerpac pumps—not for use in power pumps. Formula includes antisludge and antirust additives. Yellow. ISO viscosity grade 15. 370°F flash point. -30°F pour point. 1 gal bottle.

**G0930605** **\$35.95**



**ENERPAC P-Series Hydraulic Hand Pumps**

Pumps can be used in horizontal or vertical position with head downward. Features an internal pressure relief valve. 3/8" NPT port. Ships with oil.

**1-Stage Hand Pump**

Steel construction with fiberglass handle. 10,000 psi 1st stage. 40 cu-in steel reservoir. 5 1/4" w x 23 1/2" d x 4 1/16" h.

**G2643103** **\$254.99**

**2-Stage Hand Pump**

Composite construction with fiberglass handle. 2-stage pump has high flow at low pressure and low flow at higher pressure. 200 psi 1st stage. 10,000 psi 2nd stage. 55 cu-in glass-filled nylon reservoir. 4 3/4" w x 21" d x 7" h.

**G1550884** **\$369.99**



**ENERPAC High-Force Hydraulic Electric Pump**

A quick and convenient power source for cylinders and presses. Portable pump is designed for intermittent use of less than 1 hour. Features a 3-way, 2-position control valve for cylinder advance/hold/release. 1/2 HP universal motor. 115 VAC. 50/60 Hz. 3/8" NPT fluid port. 231 cu-in high-impact polyethylene reservoir. 24 VDC control pendant.

**G2677464** **\$1729.95**



**PARKER Hydraulic Oil Filter Cart**

Portable oil filtration system filters fluids through primary 40-micron synthetic filter, then secondary 10-micron cellulose filter. Prefilters oil before adding to reservoir and filters existing oil. Cart features visual element replacement indicator, built-in bypass valves, 7' hoses (2), 3' wands (2) and "on/off" switch. 3/4 HP. 115 VAC. 150°F (max). 10 gpm (max). 19" w x 25 1/2" d x 40 1/2" h.

**G0552727** cart system **\$1689.99**  
**G2449447** 10 micron cellulose filter **\$34.01**  
**G1828836** 40 micron polyester filter **\$29.90**

**VALUE BRAND Air-Powered Hydraulic Pump**

Powerful motor has an internal check valve to eliminate pulsing and provide a consistent pressure. Use to operate and control hydraulic presses and heavy construction equipment. Features a lightweight, corrosion-resistant aluminum reservoir and by-pass system that protects the unit from pressure overload. Foot or hand actuation. 10,000 PSI capacity. 90 to 175 psi operating air. 1/4" NPT air inlet. 3/8" NPT fluid port. 91.5 cu-in oil capacity. 5" w x 10" d x 7 1/8" h.

**G3109854** **\$394.99**



**ENERPAC Air-Powered Hydraulic Pump**

Hand- or foot-operated pump 3-position treadle for cylinder advance/hold/retract. Features include a built-in pressure control valve, swivel air coupling on air intake port, built-in carrying handle and base mounting slots. 10,000 psi capacity. 60 to 120 psi operating air. 1/4" NPT air inlet. 3/8" NPT fluid port. 36 cu-in oil capacity. 5 1/2" w x 14 1/16" d x 5 3/4" h.

**G2740674** **\$507.95**



**HALDEX BARNES W900 Series Hydraulic Gear Pumps**

Through-bore, bushing-type pumps are ideal for intermittent and continuous-duty applications. These reliable, high-efficiency gear pumps provide a comparably continuous, nonpulsating flow. Lightweight design features aluminum center section with cast-aluminum end covers. Right-hand rotation. Pressure balanced. SAE flanges. 10-micron filtration required. 3/4 x 1 1/4" keyed shaft extension.



#	displacement	range	flow @ 1200 rpm	continuous pressure	inlet	outlet	price
G0573151	0.49 cu-in/rev	500 to 4000 rpm	2.5 gpm	4000 psi (max)	1 1/8"-12	3/8"-14	<b>\$180.57</b>
G2759477	0.67 cu-in/rev	500 to 3600 rpm	3.5 gpm	4000 psi (max)	1 1/8"-12	3/8"-14	<b>\$193.68</b>
G1527407	1.16 cu-in/rev	500 to 3000 rpm	6.0 gpm	4000 psi (max)	1 1/8"-12	1 1/8"-12	<b>\$205.66</b>
G3092722	1.6 cu-in/rev	500 to 2400 rpm	8.3 gpm	2700 psi (max)	1 1/8"-12	1 1/8"-12	<b>\$167.99</b>

**COOL-LINE D-Series Forced-Air Oil Coolers**

D-Series oil coolers maximize cooling capability while minimizing pressure drop. Ideal for rugged environments. Easy-to-clean, nonlouvered external fin prevents clogging. Aluminum bar/plate cooler construction is 30% to 50% smaller than copper tube/aluminum fin oil coolers for the same heat transfer. Hollow profile design reduces local peak strains, significantly increasing cooler service life. Performance is based on oil entering cooler 100°F higher than ambient air temperature. Brazed aluminum construction with black painted finish. IP 68 frame. Mounting bracket included. 10 HP heat removed. 2 to 30 gpm. SAE #12 port. 0.08 HP motor. 377 psi (max). 250°F (max). 12VDC. 13.78" w x 6.02" d x 11.46" h.



G3171883 **\$309.99**

**COOL-LINE A-Series Forced-Air Oil Coolers**

A-Series oil coolers offer maximum cooling effectiveness with minimum pressure drop. Aluminum bar/plate cooler construction is 30% to 50% smaller than copper tube/aluminum fin oil coolers for same heat transfer performance. Hollow profile design reduces local peak strains for a significant increase in cooler service life. Performance is based on oil entering cooler 50°F higher than ambient air temperature. Brazed aluminum construction with black painted finish. 56C NEMA/IEC frame. Mounting feet included. 5 HP heat removed. 2 to 30 gpm. SAE #12 port. 1/4 HP motor. 250°F (max). 115/230 V. 13.78" w x 12.56" d x 13.74" h.

G2079743 **\$699.99**

**HALDEX BARNES DC Hydraulic Power Unit**

12VDC motor pump assembly is designed for single-acting cylinders to lift, hold and lower circuits. Includes check and relief valves and cavity for adding solenoid lowering valve. Vertical or horizontal mounting. Requires remote reservoir. 3/16-18 (SAE #6) ports. 3000 psi (max). 2.4 gpm @ 500 psi. 1.4 gpm @ 2000 psi. 5.5" w x 11.9" d x 6.5" h.



G0880887 **\$346.41**

**HALDEX BARNES AC Hydraulic Power Unit**

Heavy-duty cast-iron pump features quiet hardened steel gears. Aluminum center adapter serves as a port manifold and valve housing with load-holding check and adjustable relief valve. Includes standard 1 1/2 gal oil reservoir. 3/16-18 (SAE #6) ports. 3-phase. 1HP. 1gpm. 1500 psi (max). 230/460 VAC. 1800/1500 rpm. 8 3/4" w x 21 1/2" d x 8 3/4" h.



G1244153 **\$636.09**

**ENERPAC Pressure Gauge and Adapter**

For use with all cylinders and presses.

**Gauge**

Stainless steel cases resist corrosion. Glycerine-filled gauge is designed for high-vibration applications. Requires adapter. 1 to 10,000 psi range—100 psi gradations. ±1% accuracy. 4" dial. 1/4" NPT connection.



G2580995 **\$154.95**

**Adapter**

Allows easy installation of gauges into line. 1/4" FNPT gauge port. 3/8" NPT fitting. 3/8" FNPT fitting. 5 1/4" length.



G2127271 **\$42.95**

**PARKER Accumulator Charging and Gauging Kit**

Kit can be used for charging either a bladder or piston accumulator. 3000 PSI (max). 0.96-14" RH SAE accumulator connection.

G3427794 kit **\$189.99**

kit includes: 10' hose with fittings, adapter and gas valve, bleeder valve, gas chuck, pressure gauge



**MAXIM Double-Acting Welded Cylinders**

Cross-tube mounted cylinders feature ductile-iron pistons and precision-honed steel tubes with Polypak rod seals and high-tensile strength chrome-plated tie rods. Black finish. 3000 psi (max). 20° to 220°F. SAE #4 port. 1 1/2" bore diameter. 3/4" pin diameter.

G3299791	6" stroke/14" retract	<b>\$80.31</b>
G1259894	8" stroke/16" retract	<b>\$82.85</b>
G2785194	10" stroke/18" retract	<b>\$88.39</b>
G3121535	12" stroke/20" retract	<b>\$92.78</b>

**CONCENTRIC Hydraulic Reservoir Tanks**

High-capacity units replace 2- or 3-qt reservoirs in horizontal mounting only. Heavy-duty construction and black enamel coating. 3,000 psi (max).

**2.5 Gal Cylindrical**

501 cu-in useable capacity. 18 1/8" length. 6 5/8" diameter.

G1341751 **\$59.99**

**2.5 Gal Rectangular**

405 cu-in useable capacity. 8" w x 11" d x 6 1/2" h.

G0700007 **\$59.99**

**4 Gal Rectangular**

663 cu-in useable capacity. 8" w x 17 1/2" d x 6 1/2" h.

G0372836 **\$79.99**



14  
PIECE

**VALUE BRAND Hydraulic Ram System**  
Hydraulic maintenance and repair kit is complete with everything needed for bending, pushing, pulling and spreading. 10 ton capacity. 10,000 psi (max). 6" stroke.

G1063772 14-piece kit **\$294.16**  
kit includes: hand pump assembly with hose, heavy-duty spreader ram, 2 3/4" rubber head, rubber-faced flat base, ram toe and plunger toe, chrome-plated long-life ram plunger, serrated saddle, wedge head, combination head, 27, 18, 10 and 4 1/8" extension tubes



## INNOVATIVE COMPONENTS

### Star Knob

Star knobs are ideal for high torque applications, with rounded edges for comfortable grip. Impact- and scratch-resistant black polypropylene knob has a steel zinc insert. Heat resistant to 225°F. 2¼" knob with 1" base. 1" screw with ¾-16 thread.

G1145252 **\$0.79**



## INNOVATIVE COMPONENTS

### T-Knob

T-Knobs are ideal for moderate to heavy torque applications. Impact and scratch-resistant black polypropylene knob has a steel zinc insert and satin finish. Heat resistant to 225°F. 2" knob with ¾" base. Thru tap with ¼-20 thread.

G0286194 **\$0.69**



## INNOVATIVE COMPONENTS

### Knurled Knob

Deep, coarse knurls and rounded edges provide sure grip. Impact and scratch resistant. Designed for quick adjustment. For use in applications where clearance is an issue. Nylon plastic construction with steel zinc insert. Heat resistant to 275°F. 1" knob with ¾" base. Blind tap with 10-24 thread.

G2883815 **\$0.99**



## INNOVATIVE COMPONENTS

### T-Knob Pop Pin

Pop pin with weld-on barrel offers a quick, convenient way to adjust height or length on many applications. Case-hardened zinc-plated steel provides strength and durability. Non-leaded, non-plated steel barrels for welding are included. Use locking pins when security is needed. Tapered tip measures ½" in diameter and 0.61" in length.

G2909776 **\$7.50**




## PRECISION BRAND Steel Shim Stock Assortments

For use in general shimming applications and tool die fields where hardness, flatness and accuracy are required. Low-carbon steel construction. 6" x 12" sheets. Lot numbers printed on every sheet.

G2361877 12-piece assortment **\$26.75**  
assortment includes: 0.001", 0.0015", 0.002", 0.003", 0.004", 0.005", 0.006", 0.007", 0.008", 0.010", 0.012", 0.015"

G1585297 15-piece assortment **\$33.66**  
assortment includes: 0.001", 0.0015", 0.002", 0.003", 0.004", 0.005", 0.006", 0.007", 0.008", 0.010", 0.012", 0.015", 0.020", 0.025", 0.031"




## TE-CO T-Slot Nuts

T-Slot nuts are constructed of durable, case-hardened 1018 steel with black oxide finish. Last thread is incomplete to prevent stud from turning through the bottom of the nut. Undersized to fit machine table slot.

### ► MORE SIZES ONLINE

Q#	thread	table slot base	price
G1674434	¾-18	¾"	¾" <b>\$2.39</b>
G0818684	¾-16	¾"	¾" <b>\$2.39</b>
G1777921	¾-16	¾"	¾" <b>\$2.29</b>
G1858631	½-13	¾"	1¾" <b>\$2.70</b>
G1805711	½-13	¾"	1¾" <b>\$2.89</b>



## TE-CO Machinist Clamping Kit

Great for workholding during machining applications. ½" T-slots for use with ½-13 stud size.

G1647037 kit **\$87.50**  
set includes: studs (24), coupling nuts (4), flange nuts (6), T-slot nuts (6), T-slot cleaner (1), step blocks (6), serrated end clamps (6), holder (1)



52  
PIECE

## JACOBS Wedge Sets

Wedge sets are used to remove taper mount chucks from arbors.

G3481597 for 1JT  
G0301454 for 2JT  
G0565573 for 3JT  
G1714474 for 6JT  
each **\$6.49**



## DORIAN Turning and Facing Tool Holders

Ideal for holding square shank indexable toolholders close to the tool post to maximize rigidity when turning, facing and threading. For CNC and manual lathes.

SDN25AXA Series  
For use with AXA tool post.  
¾" capacity.

G2184506 **\$51.82**

SDN30BXA Series  
For use with BXA tool post.  
1" capacity.

G0905527 **\$52.89**



## DAYTON Machining Vises

Vises feature a fixed base and are constructed of cast iron. Mechanical screw apparatus clamps hold piece to allow work to be performed on it. 0.002" jaw deflection at 2,000lb. Square to 0.002" jaw plate. Parallel to 0.001" bed/base.

### Drill Press Vise

Can be used turned on either side or end. 4" jaw width. 4" jaw opening. 1½" throat depth. 9¾" length. 2¾" height.

G0889926 **\$61.25**



### Standard Drill Vise

Standard vise with ½" wide slotted shoulder and precision-ground guide bars provide smooth, accurate travel and clamping. 6" jaw width. 6" jaw opening. 2" throat depth. 12¾" length. 3¾" height.

G0323723 **\$119.64**



## PALMGREN

### General-Purpose Machining Vise

Moveable jaw is flat ground while the fixed jaw is machined with a horizontal and vertical V-groove. Includes mounting lugs. 0.002" jaw deflection at 2,000lb. Square to 0.002" jaw plate. Parallel to 0.001" bed/base. 3" jaw width. 3" jaw opening. 1½" throat depth. 6¾" length. 2¾" height.

G3246695 **\$87.64**



**JACOBS Keyless Drill Chuck**


Medium-duty drill chuck with self-tightening feature automatically increases gripping force proportional to increased torque, preventing tool shank slippage in clockwise rotation. Automatic fitting eases quick tool changes. Designed for high accuracy applications on conventional or CNC equipment. For use with portable and stationary drilling machines. Steel construction. 33JT Jacobs mount. 1.73" chuck diameter. 0.039" to 0.512" capacity.



G1364693 **\$92.71**

**JACOBS Chuck Keys**

Chuck key handles are constructed of soft steel to reduce fracture risk under excessive loads. Nickel thumb grip handles offer increased leverage and user comfort.



- G2452554 #K3 (3/16" pilot size) **\$5.59**
- G3447656 #K3C (3/16" pilot size) **\$6.89**
- G1166934 #K4 (3/8" pilot size) **\$8.80**
- G2435614 #K30 (3/16" pilot size) **\$3.99**

**IRWIN HANSON Screw Extractor Set**

Multi-spline extractors can be used to remove broken studs, bolts, socket screws and fittings for high torque applications. Left-hand spiral design provides extra gripping power. High carbon steel construction is heat treated and tempered for long life. **MORE ONLINE**



10  
PIECE

G1848131 10-piece set **\$19.79**

set includes: 3/16", 1/8", 5/32", 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 13/32"

**CHICAGO-LATROBE Screw Extractor Set**

Tapered left-hand spiral flutes grip screws firmly. High-carbon steel construction is heat

treated and tempered for long life. For removing 3/16" to 1" studs, bolts and screws. 1/8" pipe capacity. Set comes in a plastic pouch.

G1698137 6-piece set **\$24.65**  
set includes: #1, #2, #3, #4, #5, #6

**DE-STA-CO Toggle Clamps**

Straight-line action clamps replace fasteners for secure holding of parts on fixtures. All models lock in both extended and retracted positions to provide holding force in "pull" or "push" directions. Straight handle with ergonomic grip. 0.44" plunger with 3/16"-18 thread.



**Through-Hole Mounted**

300 lb holding capacity. 1.5" plunger travel. 4.95" length. Includes locking nut.

G0812323 **\$12.49**

**Standard**

600 lb holding capacity. 1.25" plunger travel. 4.73" length.

G2683581 **\$14.92**



8  
PIECE

**WIDIA METAL REMOVAL Carbide Bur Set**

Double-cut carbide burs are machine-ground and tool-built to exacting tolerances of concentricity, size and shape. 1/4" shank.

G1167424 8-piece set **\$129.75**  
set includes: SA-1, SC-1, SD-1, SE-1, SF-1, SG-1, SL-1, SM-2

**VALUE BRAND Lathe Guards**

Clear polycarbonate, semi-circular wrap-around guards are ready to mount—just affix mounting bracket with two screws. Includes mounting bracket, extension tube and hardware. 482 to 590°F melting range.




#	for chuck	dimensions	price
G1586471	6" to 12"	6"w x 12"d x 6"h	<b>\$88.98</b>
G2378616	12" to 16"	8"w x 16"d x 8"h	<b>\$104.17</b>
G2417877	16" to 20"	8"w x 20"d x 10"h	<b>\$128.04</b>

**MASON**

**Vibration Isolation Pad**

Pad features a cemented steel plate between a bottom super waffle pad and top 1/4" friction pad. Neoprene and steel pad provides protection in isolating vibration with 3,600 and 1,750 rpm pumps and refrigeration compressors. For concentrated loads such as heavy machines with small legs or formed sheet metal legs without a bottom surface. 800 lb steady load (max). 4"w x 4"d x 1 1/4"h.



G2279121 **\$7.77**

**MASON**

**Spring Hanger Vibration Isolator**

Steel springs reduce vibration transmission 2 to 6 times better than neoprene—performance improves with larger deflections. LDS rubber cups under the springs and a projecting rubber bushing prevent sound transmission. 55 to 76 lb capacity. 3/8" rod diameter (max). 3 1/2" lower rod penetration. 0.75" to 1.02" deflection. Black steel spring. 2 7/8"w x 2 1/2"d x 4 1/4"h.



G1640624 **\$29.99**

**ABANAKI**

**Disk Skimmer**

Oil skimmers remove unwanted floating oils from coolants and parts washers. Improves microfinish on parts. Polymer housing will not corrode. Capped troughs prevent oil drips. Boomerang blades wipe more oil. Shaft prevents premature bearing wear. 12" disk prevents warping. Removes up to 1.5 gph. 110 V fan-cooled gearmotor. 7 rpm. 4" reach.




G1509925 **\$166.09**

**DAYTON Portable Dust Collector**

Single-stage, high-efficiency dust collector is designed to remove and collect wood chips and dust from woodworking machinery. Cloth bag collects chips and filters fine dust. Not suitable for aluminum or other reactive dust or for hot metal dust such as from a grinder. Collector features a 4" intake hose, rollbar cradle and handle for mobility. Unit includes a 5' wire-reinforced PVC inlet hose and clamps, 30 micron bag, sheet metal pick-up nozzle and 8' cord. 3/4 HP. 115/230 V. 7.5 AAC. 550 cfm (max).

G3359562 **\$243.81**

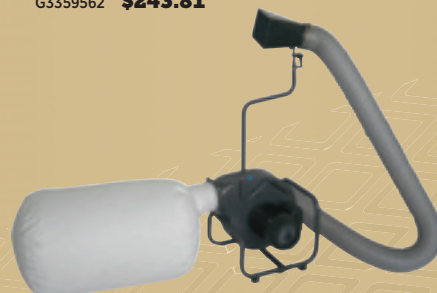

**HUOT Drill Dispensers**

Jobber length drill dispensers feature steel and vinyl construction. Cutting tools NOT included.

**Original Letter Size**

3-Drawer design features 26 compartments. Holds A to Z. 14 1/4"w x 7 3/4"d x 7 3/4"h.

G1408163 **\$69.85**

**Original Fractional**

3-Drawer design features 29 compartments. Holds 1/16" to 1/2" by 64ths. 14 1/4"w x 7 3/4"d x 7 3/4"h.

G1502207 **\$65.85**

**Original Wire Gauge**

5-Drawer design features 60 compartments. Holds 1 to 60 wire gauge. 14 1/4"w x 7 3/4"d x 7 3/4"h.

G1619965 **\$79.85**

**Master Dispenser**

4-Drawer design features 159 compartments and lock. Holds 1/16" to 1/2" by 64ths, 1 to 60 wire gauge and A to Z. 26"w x 12"d x 12 1/4"h.

G2160024 **\$346.60**



MORE THAN 400,000 ITEMS ONLINE

**TB WOOD'S Light-Duty V-Belt Pulleys**

Fixed-bore light-duty sheaves are efficient and lightweight. For use with 3L, 4L, A or AX V-belts. Pitch is dependant on belt selection. Solid cast iron construction with gray finish.  $\frac{3}{16}$ " x  $\frac{3}{32}$ " keyway with standard setscrew. Single groove.



Z#	outside dia	bore dia	3L belt pitch dia	4L, A, AX pitch dia	price
G1211892	1.75"	$\frac{5}{8}$ "	—	1.5"	<b>\$4.72</b>
G0903375	2.05"	$\frac{5}{8}$ "	1.46"	1.8"	<b>\$4.72</b>
G1793696	2.25"	$\frac{5}{8}$ "	1.66"	2"	<b>\$4.59</b>
G0854621	2.55"	$\frac{5}{8}$ "	1.96"	2.3"	<b>\$4.59</b>
G1410534	2.55"	$\frac{7}{8}$ "	1.96"	2.3"	<b>\$5.45</b>
G1243304	3.75"	$\frac{5}{8}$ "	3.16"	3.5"	<b>\$9.99</b>

**CONGRESS V-Belt Pulley**

Fixed-bore precision sheaves have machined grooves and bores for high concentricity. For use with 3L, 4L, A or AX V-belts. Pitch is dependant on belt selection. Die-cast Zamak/zinc alloy spoke construction further reduces weight. Hollow-head set screws.



**$\frac{1}{2}$ " Bore Diameter**  
No keyway.

Z#	outside dia	3L belt pitch dia	4L, A, AX pitch dia	price
G2490293	12"	11.55"	11.85"	<b>\$28.59</b>

**$\frac{3}{8}$ " Bore Diameter**  
 $\frac{3}{16}$ " x  $\frac{3}{32}$ " keyway.

Z#	outside dia	3L belt pitch dia	4L, A, AX pitch dia	price
G2038373	6"	5.55"	5.85"	<b>\$11.68</b>
G3503753	10"	9.55"	9.85"	<b>\$27.99</b>
G2831683	14"	13.55"	13.85"	<b>\$39.99</b>

**$\frac{3}{4}$ " Bore Diameter**  
 $\frac{3}{16}$ " x  $\frac{3}{32}$ " keyway.

Z#	outside dia	3L belt pitch dia	4L, A, AX pitch dia	price
G0307937	9"	8.55"	8.85"	<b>\$18.99</b>
G2599152	12"	11.55"	11.85"	<b>\$31.99</b>
G1902826	14"	13.55"	13.85"	<b>\$39.99</b>

**1" Bore Diameter**  
 $\frac{1}{4}$ " x  $\frac{1}{8}$ " keyway.

Z#	outside dia	3L belt pitch dia	4L, A, AX pitch dia	price
G0514333	12"	11.55"	11.85"	<b>\$32.99</b>
G1067193	14"	13.55"	13.85"	<b>\$45.99</b>

**CONGRESS Stepped V-Belt Pulleys**

3-step and 4-step sheaves feature bore and grooves machined together to provide high concentricity. Use in pairs (1 inverted), in any combination, for effective speed regulation. Fits  $\frac{3}{8}$ " or  $\frac{1}{2}$ " diameter shaft. Pitch diameter is 0.15" less than outside diameter. Use only one 4L or A section V-belt per pair (or set). Solid die-cast Zamak/zinc alloy. Includes reducer bushing.

**3-Step Sheaves**

Z#	outside diameters	price
G2261007	1 $\frac{1}{8}$ ", 2 $\frac{1}{2}$ ", 3 $\frac{3}{8}$ "	<b>\$19.99</b>
G1149547	2", 3", 4"	<b>\$18.41</b>
G0831616	3", 4", 5"	<b>\$22.64</b>

**4-Step Sheaves**

Z#	outside diameters	price
G2082613	2", 2 $\frac{1}{2}$ ", 3 $\frac{3}{8}$ ", 4"	<b>\$21.24</b>
G1147404	2", 3", 4", 5"	<b>\$25.99</b>
G2315862	3", 4", 5", 6"	<b>\$20.19</b>



$\frac{1}{2}$ " x  $\frac{3}{16}$ "



**DAYTON FHP V-Belts**

Dayton V-belts interchange with brands like Browning, Goodyear, Carlisle, Gates and Dayco. All belts are oil- and heat-resistant and static-conductive. Wrapped rubber body with polyester cords.  $\frac{1}{2}$ " top width.  $\frac{3}{16}$ " thickness. **MORE SIZES ONLINE**

**4L V-Belts**

G1227362	industry # 4L190 (19" length)	
G2742311	industry # 4L200 (20" length)	
G1621821	industry # 4L210 (21" length)	
G0369336	industry # 4L220 (22" length)	
G1116035	industry # 4L230 (23" length)	
G2643742	industry # 4L240 (24" length)	
G1095753	industry # 4L250 (25" length)	
G2821935	industry # 4L260 (26" length)	
G1749867	industry # 4L270 (27" length)	
G0698616	industry # 4L280 (28" length)	
each	<b>\$4.91</b>	

**A V-Belts**

G1446663	industry # A34 (36" length)	<b>\$11.69</b>
G0578611	industry # A36 (38" length)	<b>\$12.01</b>
G1582296	industry # A39 (41" length)	<b>\$12.71</b>
G1686641	industry # A40 (42" length)	<b>\$12.59</b>
G2213845	industry # A46 (48" length)	<b>\$13.59</b>
G0468133	industry # A48 (50" length)	<b>\$14.38</b>
G1777334	industry # A51 (53" length)	<b>\$14.95</b>



**OTC Belt Tension Gauge**  
Universal belt tension gauge checks drive belts for proper tension. 30 to 180 in-lb. 8" length.  
G2695822 **\$107.99**

**POWER DRIVE V-Belt Tension Checker**

Compact, spring-loaded tension checker is adjustable for a 10" to 170" belt span and up to 35 lb of tension. For use with 3L, 4L, 5L, A, B, C, D, 3V, 5V and 8V belts.  
G0489587 **\$19.99**



**POWERWIST PLUS Link V-Belts**

Premium link-type V-belts provide a longer-lasting, permanent upgrade for V-belt drives. Assemble to any length, eliminating the need to stock multiple replacement belts. For use with single or multiple V-belt drives—easily install without dismantling drives. Offers superior resistance to oil, water and chemicals. Composite polyurethane/polyester construction. -40° to 240°F.

**A/4L Belts**  
 $\frac{1}{2}$ " top width.

G3722311	5'	<b>\$29.99</b>
G3611456	25'	<b>\$156.02</b>

**B/5L Belt**  
 $\frac{3}{8}$ " top width.

G3742776	6'	<b>\$48.07</b>
G3731217	25'	<b>\$181.04</b>



**POWER DRIVE Delrin Shaft Couplings**

Complete coupling consists of 2 sprockets (sold separately) and chain. Use with stainless steel sprockets for washdown applications. No lubrication required. Corrosion-resistant Delrin construction. 40 pitch.

**Chain Coupling**

Includes slip-fit coupler pin. For use with 40-pitch 16-teeth sprockets (2). 3" diameter. 1 $\frac{1}{4}$ " width.  
G3415632 **\$30.30**

**Chain**

10' length.  
G1510144 **\$379.99**



**FENNER DRIVES Roller Chain Pullers**


Pullers are for use with roller chains.  
G1502557 for ANSI 35 to 60 **\$23.13**  
G2475225 for ANSI 80 to 240 **\$52.99**

**TSUBAKI Roller Chains**

Roller chains feature hardened carbon steel construction and are fully interchangeable with other ANSI roller chains. Factory preloading, lube-grooved bushings and prelubrication minimize wear elongation. 10' length with coupling link.


■ ANSI STANDARDS **MORE SIZES ONLINE—LINKS ALSO AVAILABLE**

Z#	type	ANSI chain	pitch	roller diameter	width	load (max)	tensile strength	price
G2128436	single strand	40	$\frac{1}{2}$ "	0.312"	0.717"	810 lb	4,290 lb	<b>\$28.99</b>
G1378876	single strand	50	$\frac{3}{8}$ "	0.4"	0.878"	1,430 lb	7,050 lb	<b>\$44.79</b>
G1984814	double strand	35-2	$\frac{3}{8}$ "	0.2"	0.898"	810 lb	5,060 lb	<b>\$64.93</b>
G0413314	double strand	50-2	$\frac{3}{8}$ "	0.4"	1.595"	2,430 lb	14,100 lb	<b>\$93.99</b>

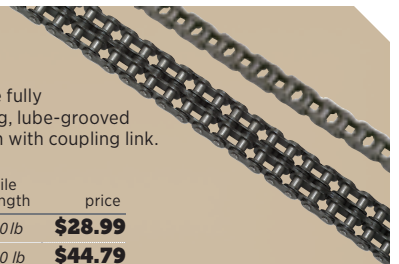

**DAYTON AC Gearmotor**

Shaded-pole gearmotor has impedance thermal protection. Clockwise rotation when viewing output. Gearcase is constructed of die-cast zinc with a steel cover. Gears are Delrin and steel. Porous bronze sleeve bearings on both case and motor. Grease-filled lubrication. All-position mount. 115 VAC. 6.9 rpm nameplate. 35 in-lb full load torque. 439:1 gear ratio. ■ UL, CSA STANDARDS  
G1761837 **\$51.83**



**DAYTON AC Gearmotor**

Shaded-pole gearmotor has impedance thermal protection. Clockwise rotation when viewing output. Gearcase is constructed of die-cast zinc. Gears are Delrin and steel. Porous bronze sleeve bearings on both case and motor. Grease-filled lubrication. All-position mount. 115 VAC. 4 rpm nameplate. 18 in-lb full load torque. 734:1 gear ratio. ■ UL, CSA STANDARDS  
G0509467 **\$50.59**



**DAYTON AC Gearmotors**

Unit is powered by a split-phase motor and is reversible. Gearcase is constructed of die-cast zinc. Open drip-proof enclosure. Gears are cut steel and phenolic. Porous bronze sleeve bearings on case and ball bearings on motor. Grease-filled lubrication. All-position mount. 115 VAC. ■ UL/CUL, CSA, RU STANDARDS



#	nameplate	full load torque	gear ratio	price
G0529356	30 rpm	400 in-lb	57:1	<b>\$391.35</b>
G2734051	12 rpm	600 in-lb	144:1	<b>\$391.35</b>
G3040247	6 rpm	600 in-lb	286:1	<b>\$391.35</b>

**DAYTON DC Gearmotor**

Gearmotor is powered by a permanent magnet DC motor and designed to operate in either direction. Gearcase is constructed of die-cast zinc. Totally enclosed non-ventilated enclosure. Spur gears are Delrin and steel. Bronze sleeve bearings on both case and motor. Grease-filled lubrication. All-position mount. 12 VDC. 12 rpm nameplate. 40 in-lb full load torque. 603:1 gear ratio.  
G1052773 **\$56.61**



**DART CONTROLS DC Variable Speed Control**

Adjustable-speed control is for use with permanent magnet or shunt-wound DC motors and gearmotors. For use in material handling, laboratory, food processing, pump, fan/blower, conveyor, machine tool, DC motor and spooling applications. Solid-state speed controls convert line voltage input to full-wave DC power on constant- or diminishing-torque applications. Chassis model includes speed pot, knob and dial plate. 120/240 VAC input. 1/8 to 1/2 HP @ 90 VDC. 1/4 to 1 HP @ 180 VDC. 50:1 speed range. Fixed 6 second linear acceleration and deceleration. ■ UL/CUL, CE STANDARDS  
G0491547 **\$49.99**



**NTN Radial Ball Bearings**

Permanently sealed bearings offer a lifetime of quiet, maintenance-free operation. Seal is made of synthetic rubber molded to a steel plate. V-shaped groove acts as a "flinger" to keep dirt out. Cages constructed of pressed steel. Bearings are pre-lubricated. Bearings are individually wrapped and boxed to protect from contaminants during shipping and storage. ► MORE ONLINE



**6000 Series**

#	bore (mm)	dia (mm)	width (mm)	dynamic/static capacity (lb)	price
G2576165	10	26	8	1030/440	<b>\$8.79</b>
G0611721	30	55	13	2970/1860	<b>\$24.12</b>

**6200 Series**

#	bore (mm)	dia (mm)	width (mm)	dynamic/static capacity (lb)	price
G2170393	10	30	9	1150/540	<b>\$7.11</b>
G1399991	17	40	12	2160/1030	<b>\$7.57</b>
G3280006	20	47	14	2890/1500	<b>\$8.96</b>
G2248057	25	52	15	3150/1700	<b>\$8.79</b>
G1391467	30	62	16	4400/2540	<b>\$14.53</b>

**6300 Series**

#	bore (mm)	dia (mm)	width (mm)	dynamic/static capacity (lb)	price
G2838972	35	80	21	7500/4300	<b>\$29.23</b>



**BESSEY Bearing Heaters**

Cone-style bearing heater is for use with 3/8" to 5 3/4" inner diameter bearings. Includes an 8' cord and 250°F indicator crayon. 120 V. 725 W. 9" w x 10" d x 10" h.  
G3166721 **\$359.99**

**DAYTON Shaft Collars**

Set screw shaft collars are for soft or predrilled shafts. Collars lock onto shaft by tightening cup point socket set screw. Zinc-plated steel collars have alloy screws. ► MORE ONLINE



#	inside dia	outside dia	width	screw	qty	price
G1998376	1/2"	1"	3/16"	3/4-20	3	<b>\$3.36</b>
G1180584	3/4"	1 1/4"	3/16"	3/4-18	3	<b>\$4.64</b>
G0721165	1 1/4"	2"	1 1/16"	3/8-16	1	<b>\$3.73</b>



**DAYTON Pillow Block Bearings**

Two-piece housing has rustproof plated finish. Self-aligning bearings correct misalignment up to 2°. Neoprene seal keeps contaminants out. Bearing inserts are prelubricated and made to ABEC-1 tolerances. Wide inner race locks securely with set screws.

#	bore	dynamic	static	price
G1237433	3/8"	2152 lb	1075 lb	<b>\$16.09</b>
G0542211	3/4"	2877 lb	1479 lb	<b>\$16.09</b>
G2917652	1"	3153 lb	1768 lb	<b>\$16.09</b>

**LOVEJOY Jaw Coupling Spiders**

Buna-N spiders are made of oil-resistant, highly resilient material. Inserts accommodate 1° angular and 0.015" parallel misalignment. ► MORE ONLINE

#	max torque	coupling size	rating @ 300 rpm	rating @ 1200 rpm	rating @ 1800 rpm	rating @ 3600 rpm	price
G2233296	90 in-lb	A/L075	0.4 HP	1.7 HP	2.6 HP	5.0 HP	<b>\$4.07</b>
G3346314	144/194 in-lb	A/L090/L095	0.7/0.9 HP	2.8/3.7 HP	4.1/5.5 HP	8.3/11 HP	<b>\$4.42</b>
G0952131	318/417 in-lb	A/L099/L100	2 HP	7.9 HP	12 HP	24 HP	<b>\$9.93</b>
G3123486	792 in-lb	A/L110	3.8 HP	15 HP	23 HP	46 HP	<b>\$12.28</b>



**DUFF-NORTON Linear Actuators**

Dependable systems are designed to handle the rated load in tension and compression applications. Gear-driven actuators use geared limit switches or clutches, and have a zinc-plated translating tube. Aluminum housing. ► MORE ONLINE

**Permanent Magnet**  
12 VDC. 44 in./min. 500 lb load. 18% duty cycle.

#	travel	retracted	price
G0961974	6"	13"	<b>\$327.49</b>



**Permanent Split Capacitor**  
Thermally protected. 115 VAC. 50 in./min. 1500 lb load. 23% duty cycle.  
■ UL/CUL, CSA STANDARDS

#	travel	retracted	price
G1848585	6"	20.10"	<b>\$955.50</b>
G0601842	12"	26.10"	<b>\$971.23</b>
G3154252	18"	32.10"	<b>\$997.43</b>



**LOVEJOY Jaw Coupling Hubs**

A complete assembly requires two hubs and one jaw-coupling spider (sold separately). Hollow-head set screws. No lubrication required. Sintered iron construction. ► MORE ONLINE



#	size	OD	length	bore	keyway	price
G1092777	L050	1.08"	1.71"	3/8"	no	<b>\$3.57</b>
G1884364	L050	1.08"	1.71"	3/8"	no	<b>\$3.57</b>
G3079946	L075	1.75"	2.13"	1/2"	yes	<b>\$5.88</b>
G2018615	L075	1.75"	2.13"	5/8"	yes	<b>\$5.88</b>
G1969301	L075	1.75"	2.13"	3/4"	yes	<b>\$5.88</b>
G0384605	L075	1.75"	2.13"	7/8"	yes	<b>\$5.88</b>
G2692383	L095	2.11"	2.51"	3/4"	yes	<b>\$14.92</b>
G3028277	L095	2.11"	2.51"	1"	yes	<b>\$14.92</b>



KEEP THINGS  
RUNNING SMOOTHLY.

**WD-40 Lubricant**

Penetrates, loosens and frees stuck, frozen, or rusted parts. Lubricates and protects metal against corrosive elements. Cleans and removes grease, grime, tar and more. Displaces moisture and is nonconductive. Cans with attached Smart Straw red extender tube offer precision stream or regular spray.

- G1670934 3 oz (aerosol) **\$2.39**
- G3419726 8 oz (smart straw) **\$3.98**
- G0799014 11 oz (smart straw) **\$4.69**
- G3400442 12 oz (smart straw) **\$4.98**
- G3406557 16 oz (industrial size) **\$5.23**
- G2056625 18 oz (big blast) **\$5.79**
- G0815227 1 gal (pour spout) **\$16.99**
- G3177474 5 gal (pour spout) **\$87.99**



**SLIP PLATE**

**Dry Film Lubricant**

Aerosol coating for small and touchup applications where sliding friction is a problem. Spray-on greaseless coating minimizes friction, reduces corrosion and repels water, dust and dirt. Safe on metals, wood and most plastics. Dry film with graphite. 12 oz aerosol.

- G2655791 **\$7.13**



**LPS LABORATORIES**

**Greaseless Lubricant**

Dry, thin, greaseless film displaces moisture and resists dirt and dust buildup. Safe on most seals, paint and plastics. Sprays upside-down. Nonconductive, VOC-free and nonchlorinated. 175°F flash point. 11 oz aerosol.

- NSF H2 STANDARDS
- ✓ GREEN ENVIRONMENTAL ATTRIBUTES
- G3091225 **\$9.02**



**TRI-FLOW**

**PTFE Industrial Lubricant**

PTFE formula displaces moisture and protects against rust and corrosion. Penetrates and lubricates while removing dirt and contaminants. 60 to 475°F. 12 oz aerosol.

- NSF H2 STANDARDS
- G1846397 **\$7.59**



**CRC Dry Moly Lube**

Specially-formulated dry film lubricant with high antifriction and antiseizure properties is fast drying and nonconductive. Resists high temperatures, high pressure, water, chemical attack and dirt and dust buildup. Safe on most plastics, rubbers and metals. 11 oz aerosol.

- G1197034 **\$8.99**



**CRC Food-Grade Silicone**

Machine oil spray forms a colorless, odorless, nonstaining film that lubricates and protects food processing and handling equipment. Serves as a release agent and is harmless to most rubbers and plastics. For use on chutes, rails, conveyors, bottling machinery, slicers, ovens, freezers, knives, saws, vending machines and ceramic insulators. -40 to 400°F. 10 oz aerosol.

- NSF H1 STANDARDS
- G2568587 **\$5.71**



**BLASTER Heavy-Duty Solvent**

Petroleum- and solvent-based solvent contains a penetrating catalyst. For use in mechanical repairs. CO<sub>2</sub> propellant. 155°F flash point.

- G1858001 11 oz aerosol **\$3.73**
- G3120625 1 gal can **\$23.92**



**OIL EATER Cleaner Degreaser**

Removes grease, oil, dirt and grime. Excellent for use with floor scrubbers, parts washers, pressure washers, foam guns and carpet cleaners, as well as for cleaning HVAC coils. Nontoxic, nonflammable and nonhazardous. Acid-, abrasive- and petroleum-free. 1 gal bottle.

- USDA STANDARDS
- ✓ BIODEGRADABLE
- G2636347 **\$7.42**



**TAP MAGIC EP-Xtra Cutting Fluid**

Extreme-pressure lubricant penetrates to the cutting edge to break down surface tension, stress and prevent metal-to-metal adhesion. Drilling, tapping, threading and boring operations are free of drag. Yields microfine finish while preventing rust and corrosion. Great for difficult cutting operations, including long duration extreme-pressure cuts. For use on all metals—including stainless steel, aluminum and titanium. ■ OSHA STANDARDS

- G1683893 4 oz **\$2.23**
- G2336031 16 oz **\$8.08**



**DYKEM Steel Blue Layout Fluid**

Dries quickly, allowing minimal preparation time before scribing. Thin film applied to workpiece remains flexible without cracking or chipping. Noncorrosive and toluene-free. For tool and die makers, maintenance mechanics, machinists and pattern makers on a variety of materials including metals and glass.

- G2680815 4 oz brush-in-cap **\$5.99**
- G2442361 12 oz aerosol **\$10.34**



**MARVEL MYSTERY OIL Oil Additives**

Prevents oil breakdown caused by extreme temperatures. Reduces and prevents valve-sticking by removing harmful sludge and carbon deposits. Added to fuel, it helps improve mileage by reducing deposits on injectors and carburetor jets. For use with automobile, motorcycle, marine, two-cycle, tractor, gasoline and pre-2007 diesel motors. -60°F freezing point. 128°F flash point. -65°F pour point. 0.876 specific gravity.

G0455201 32oz bottle **\$3.94**  
G0490375 1gal bottle **\$16.79**




**MOBIL**

**Vactra No. 2 Way Oil**

Dual-purpose hydraulic and way oils are recommended when extreme precision or slow speeds make it necessary to eliminate stick-slip or chatter. Approved by major machine tool builders such as Cincinnati Milacron, Okuma and Bijur. Good coolant separability extends oil life. 424°F flash point. 20°F pour point. SAE grade 30. 5gal bucket.

G0584735 **\$116.59**

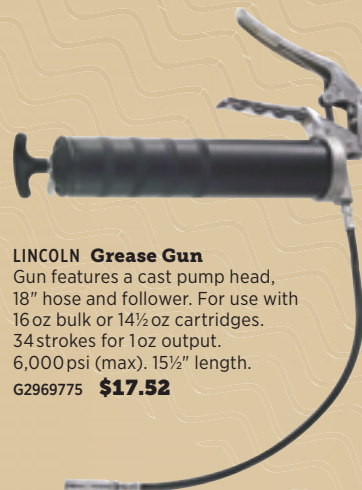

**LINCOLN Grease Gun**

Gun features a cast pump head, 18" hose and follower. For use with 16 oz bulk or 14 1/2 oz cartridges. 34 strokes for 1oz output. 6,000 psi (max). 15 1/2" length.

G2969775 **\$17.52**

**MOBIL**

**Mobilgear SHC 630 Synthetic Gear Oil**

Synthetic gear oils feature drain intervals 6 to 8 times longer than conventional mineral oils. Multiviscosity SHC base and additives are formulated for oxidation stability and corrosion protection. Nonstaining color is visible in a sight glass. For use on industrial enclosed gears, speed and gear reducers, plain and roller bearings. SAE grade 90. ISO viscosity grade 220. 1qt bottle.

G0943074 **\$14.94**



**MOBIL**

**Mobilgear 600 XP 150**

Industrial gear oils provide heightened protection against micropitting, debris denting, and bearing wear in all types of enclosed gear drives with circulation or splash lubrication systems. Outstanding extreme pressure capabilities and load carrying properties. For use on industrial spur, helical and bevel enclosed gears. 1gal bottle.

G0275046 **\$19.99**



**MOBIL Mobilgrease XHP 222 Multipurpose Grease**

Extended-service lithium complex provides lubrication, oxidation stability, and rust- and corrosion-resistance. Won't wash or spray off in severe water exposure conditions. Use in automotive, construction and marine applications, and on chassis components and farm equipment. Lithium base. NLGI grade 2. 0 to 347°F. 400°F flash point. 536°F dropping point. Dark blue. 14.1oz cartridge.

G0532226 **\$4.06**



**MOBIL Rarus 427 Air Compressor Oil**

Lubricant is designed for use with air compressors. SAE grade 30. Viscosity index 100.

G2456921 1qt **\$5.99**  
G2706541 1gal **\$22.23**



**MOBIL Vacuum Pump Oil**

Straight mineral oil with low vapor pressure. Recommended for high-vacuum applications. Suitable for use with Busch, Leybold, Gast, Pneumotive and Welch pumps. SAE grade 20. ISO viscosity grade 68. 450°F flash point. 15°F pour point. 1qt bottle.

G1612956 **\$7.06**



**MOBIL Mobilgrease FM 222 Food Grade Grease**

Designed specifically for the lubrication of food processing machinery. Grease is formulated on an aluminum complex base. NLGI grade 2. 0 to 500°F. 14.1oz cartridge.

■ NSF H1 STANDARDS  
G3258927 **\$6.63**

**MOBIL Premium Hydraulic Oil**

Formulated for most applications in industrial, marine and mobile service where zinc-free fluids are desired. For high-pressure systems, systems with servo valves, NC control mechanisms and all robotics. Antiwear industrial oils meet the requirements of all conventional and high-output hydraulic systems. Operate in a wide range of temperatures while handling heavy loads. For hand- and power-operated jacks, scissor jacks, and hand pumps. -10°F pour point.

#	size	MFR#	SAE grade	ISO grade	viscosity	price
G3321692	1gal	DTE24	10W	32		<b>\$19.20</b>
G2266187	1gal	DTE 26	20	68		<b>\$19.99</b>
G2725974	5gal	DTE24	10	32		<b>\$75.99</b>
G0838896	5gal	DTE25	15	46		<b>\$75.99</b>



**MOBIL Mobilux EP Premium Lubricating Grease**

Recommended for antifriction under normal operating conditions. Lithium hydroxystearate base. -20 to 120°C. 190°C dropping point. Brown. 14 oz cartridge.

**Mobilux EP 1**

Can be pumped at low temperatures. Suitable for centralized lubrication systems. NLGI grade 1.

G2182966 **\$3.19**

**Mobilux EP 2**

Recommended for antifriction and plain bearings, bushings and pins under normal operating conditions. NLGI grade 2.

G0667807 **\$3.89**





**MOBIL 1 Synthetic Grease**  
Recommended for automotive applications in both high and low temperatures. For use on disc brake wheel bearings and ball and steering joints. NLGI grade 2. 12 oz cartridge. Red. ■ OSHA, ASTM STANDARDS  
G3452364 **\$8.21**



**MOBIL Mobilith SHC 220 Synthetic Grease**  
Mobilith SHC Series grease combines synthetic base fluids with a lithium complex soap thickener. 12 oz cartridge. NLGI grade 2. 12 oz cartridge. Red.  
G0938077 **\$17.99**



**MOBIL Mobilgrease XHP 222 Special Multipurpose Auto Grease**  
Recommended for chassis, universal joints and disc brake wheel bearings in automotive, fleet, farm and off-highway service applications. NLGI grade 2. 14 oz cartridge. Black. ■ OSHA STANDARDS  
G1284552 **\$3.94**



**MOBIL Delvac Xtreme Grease**  
Contains a high viscosity base oil and a lithium complex thickener to provide water spray-off resistance and heavy-duty extended service. NLGI grade 2. 14 oz cartridge. Orange. ■ OSHA STANDARDS  
G3299107 **\$13.99**



**MOBIL Delvac MX Synthetic Transmission Fluid**  
Manual transmission lubricant provides outstanding high-temperature performance, oxidation stability, wear protection and corrosion control. -45°F pour point. SAE grade 50W. 1gal bottle.  
G3165267 **\$55.21**



**ZEREX G05 Antifreeze**  
Original full-chemistry formula utilizes hybrid organic acid technology to minimize inhibitor depletion. For use with Chrysler, Ford, Mercedes, Deere and GM vehicles. 8pH. -34°F freezing point. 1gal. ■ ASTM, SAE, OEM STANDARDS  
G2079122 **\$12.59**



**FLITZ PREMIUM POLISHING PRODUCTS Battery Terminal Cleaner**  
Quickly removes corrosion from battery terminals. 0.7 pH. Clear. 16 oz spray bottle. ■ SCAQMD STANDARDS  
G4560473 **\$14.70**



**CRC Lectra-Motive Electronic Parts Cleaner**  
Provides fast, thorough cleaning for non-sensitive electrical equipment. Dissolves grease, oil, dirt and wax. Non-flammable, nonstaining, nonconductive, and leaves no residue. Chlorinated. 19 oz aerosol.  
G1352145 **\$5.17**



**CARRAND Detailing Kit**  
For use with water hose.  
G5105484 8-piece kit **\$27.49**  
*kit includes: 10" multi-level wash brush, appearance brushes (7)*

8  
PIECE



**SUPERCLEAN Cleaner-Degreaser**  
Dissolves grease on contact. 32 oz spray bottle.  
G1167144 **\$4.72**



**TURTLE WAX Synthetic Car Wax**  
Synthetic formula contains water wax and removes soils. For use with microfiber towels. Beige.  
G4474872 14 oz liquid **\$13.92**  
G4474897 20 oz spray **\$7.39**



**CLEAN TOOLS The Glosser Detailing Wipes**  
Microfiber wipes contain water-based waxes and cleaners to remove dust, dirt and grime safely from all finishes while providing a glossy finish. For use with automobiles, trucks and RVs. 25" x 13".  
G1204682 5-pack **\$5.09**



**303 Aerospace Vehicle Interior Protectants**  
For use on vinyl, plastic or rubber. White. 7.0 to 7.9 pH.  
G3005423 16 oz spray **\$7.94**  
G1064472 1 gal bottle **\$36.70**



**CRC Brake Parts Cleaners**  
Removes brake fluid, oil, grease and other contaminants quickly and effectively. For use on brake linings, brake parts, clutches, wheel cylinders, springs, CV joints and disc brake parts.  
**50 State Formula**  
Non-chlorinated formula degrades instantly. Low VOC formula meets all state and federal VOC regulations. 14 oz aerosol.  
G2882914 **\$3.54**



**Non-Chlorinated Formula**  
Use where compliance calls for a chlorine-free product. Works without disassembly. Low VOC formula—not for use in CA. 14 oz aerosol.  
G3072106 **\$3.19**  
**Chlorinated Formula**  
Non-flammable formula degrades instantly and helps brakes last longer and perform more efficiently. Works without disassembly. Not for use in CA and NJ. 19 oz aerosol.  
G2813124 **\$3.40**



**GUNK Brake Parts Cleaner**  
Dissolves grease, oil, brake dust and dirt. For use with conventional brake units, linings and shoes, drums, cylinders, springs, disc brake units, CV joints, caliper units, brake pads, discs and related parts. 14 oz aerosol. Transparent. ■ SCAQMD STANDARDS  
G1439724 **\$2.86**



### BALDWIN FILTERS Spin-On Oil Filters

Heavy-duty, all-metal housing provides superior burst- and pulse-withstanding strength. Steel coil spring maintains positive load pressure on the elements. Cartridge-style filters assure the seal between the engine block and filter is not disturbed.

Q#	MFR#	length	OD	thread pitch	price
G0678377	B34	3 <sup>3</sup> / <sub>2</sub> "	3 <sup>3</sup> / <sub>4</sub> "	3 <sup>1</sup> / <sub>2</sub>	<b>\$4.08</b>
G2805896	B1432	4 <sup>3</sup> / <sub>2</sub> "	3"	1 <sup>3</sup> / <sub>16</sub> -16	<b>\$6.49</b>
G2883867	B1441	5 <sup>1</sup> / <sub>2</sub> "	3 <sup>1</sup> / <sub>2</sub> "	1 <sup>3</sup> / <sub>16</sub> -16	<b>\$6.49</b>
G0365172	B1428	5 <sup>1</sup> / <sub>2</sub> "	3 <sup>1</sup> / <sub>2</sub> "	1 <sup>3</sup> / <sub>16</sub> -16	<b>\$4.49</b>
G1219014	B7306	5 <sup>1</sup> / <sub>2</sub> "	3 <sup>1</sup> / <sub>2</sub> "	M24 x 1 <sup>1</sup> / <sub>2</sub>	<b>\$6.79</b>
G0926527	B77349	7 <sup>1</sup> / <sub>2</sub> "	3 <sup>1</sup> / <sub>2</sub> "	1-16	<b>\$5.29</b>
G2965986	B7039	7 <sup>1</sup> / <sub>2</sub> "	4 <sup>1</sup> / <sub>2</sub> "	1 <sup>1</sup> / <sub>2</sub> -16	<b>\$11.27</b>



### BALDWIN FILTERS

#### B5134 Spin-On Coolant Filter

Heavy-duty, all-metal housing provides superior burst- and pulse-withstanding strength. Steel coil spring maintains positive load pressure on the elements. Cartridge-style filters assure the seal between the engine block and filter is not disturbed. 5<sup>1</sup>/<sub>2</sub>" length. 3<sup>1</sup>/<sub>16</sub>" OD. 1<sup>1</sup>/<sub>16</sub>-16 thread pitch.



G1094143 **\$7.19**



#### PROTO Oil Filter Wrench

Stainless steel band with projection welds provide strength and corrosion resistance. Heat-treated swivel handle adjusts to a wide arc of positions. Over 150 ft-lb of torque. 4<sup>1</sup>/<sub>8</sub>" to 4<sup>7</sup>/<sub>16</sub>" grip.

G3547476 **\$11.93**



#### BALDWIN FILTERS Coolant Filter Base

Base measures 3<sup>3</sup>/<sub>2</sub>" in length with a 4<sup>1</sup>/<sub>16</sub>" outer diameter. 3/8-18 FNPT inlet and outlet.

G3193294 **\$33.99**

#### BALDWIN FILTERS Element/Separator Fuel Filter

Filter measures 4<sup>3</sup>/<sub>2</sub>" in length with a 3<sup>3</sup>/<sub>8</sub>" outer diameter and 1<sup>3</sup>/<sub>16</sub>" inner diameter.

G1857116 **\$11.99**



### CRAFTSMAN Jack Stand Set

12" to 18" lifting height. 4 ton lifting capacity. Steel construction. 8<sup>3</sup>/<sub>4</sub>" x 7<sup>1</sup>/<sub>2</sub>" base. ■ ANSI STANDARDS

G3722056  
2-piece set **\$32.99**



### CRAFTSMAN Compact Floor Jack

Internally protected from overpumping and overloading. 5" to 15" lifting height. 2<sup>1</sup>/<sub>4</sub> ton lifting capacity. Steel construction. 21" jack handle. 21" chassis length ■ ANSI STANDARDS

G3735602 **\$49.99**



### WHITESIDE Creeper

Fully padded, comfortable creeper features a special frame design for wide shoulders and a 6-position adjustable headrest.

G3283472 **\$82.99**



NITRILE GLOVES ON PAGE 7

- G0058782 *small*
- G0058791 *medium*
- G0058807 *large*
- G0058816 *x-large*



#### VALUE BRAND Shop Towels

Absorbent, low-linting cotton fabric provides tough cleaning power. 13" x 13".

G4258861 100-pack **\$23.82**



#### MOBIL Delvac MX Diesel Motor Oil


Outstanding thermal and oxidation stability helps reduce build-up, deposits and oil consumption. Features extended TBN reserves, improved soot handling, extended drain interval and stay-in-grade shear stability. -30°F pour point. SAE grade 15W-40. 1qt bottle.

G2039091 **\$5.44**

#### MOBIL Engine Oil

Advanced performance synthetic oil provides excellent engine cleanliness at drain intervals up to 5,000 miles or 6 months. -39°F pour point. SAE grade 15W-50. 1qt bottle.

G2680106 **\$12.54**



#### FUNNEL KING Plastic Funnel

Polyethylene construction features a fine mesh straining screen and hanging tab. 64 oz capacity. 6<sup>1</sup>/<sub>2</sub>" diameter.

G2534366 **\$2.69**



#### FUNNEL KING Drain Pan

Drain pan features pour spout and two handles that allow for easy spill-free pouring. Lip helps prevent splashing and makes for easier transfer. Chemical resistant. Polyethylene construction. 4 gal capacity. 17.3" diameter. 6" height

G3390344 **\$14.39**




**WEATHERTECH All-Weather Mats**

Custom all-weather, cut-to-fit mats use outer ridges to channel tray fluids and debris. Front floor mats constructed of rubber. Black.

» SPECIFIC APPLICATIONS FOR EACH ITEM ARE AVAILABLE AT ZORO.COM

G2009296 W26  
G3390457 W42  
G1834953 W51  
each **\$69.94**

CHECK ONLINE FOR THE RIGHT ONE FOR YOU

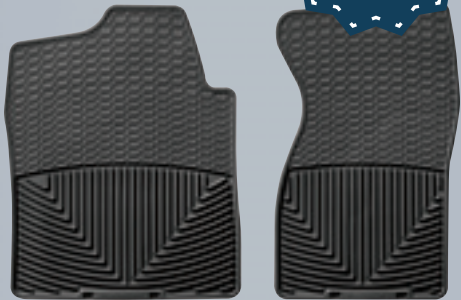

**SLIP-N-GRIP Paper Floor Mats**  
Used to protect the floor of a vehicle. 60lb paper. 17" x 22".  
G1932603  
500-pack **\$35.99**

**BELL Octopus Drink Holder**

Conveniently keeps your vehicle clean, organized and free of clutter. Polypropylene construction. Holds up to 44 oz drinks.

G3283926 **\$4.53**



**VALUE BRAND Battery Charger**

For use on cars, light- and medium-duty trucks and tractors with 12 or 24 V systems. Automatic-reset circuit breaker protects against overload. Color-coded meters. 6' 3-conductor cord. 3 to 5hr charge time. 9½" w x 6" d x 5" h.

■ UL STANDARDS  
G2395836 **\$89.99**



**SLIP-N-GRIP Key Tags**

Self-locking tag design helps secure keys and features a large writing surface. Plastic construction. 4½" x ¾".

G0310152 1,000-pack **\$13.99**



**RUST-OLEUM Rubberized Truck Undercoating**

Black rubberized undercoating protects metal surfaces from corrosion and moisture. 5 to 10 sq-ft coverage. 1 to 2hr dry time. 50 to 90°F application temp. 15oz can.

G0903865 **\$2.80**

**RUST-OLEUM Textured Truck Bed Coating**

Provides a durable nonskid finish that also resists impact, scratches, weather damage, fading, salt and solvents. Moisture- and rust-resistant. Apply with roller. 140 to 160 sq-ft coverage. 4hr dry time. 55°F application temp. 1gal can.

G0418196 **\$71.82**



**RUST-OLEUM Aerosol Truck Bed Coating**


"Any-Angle Spray" technology provides easy application in hard-to-reach areas. Comfort-tip nozzle reduces finger fatigue when painting large areas. Excellent for touch-ups. 15 to 20 sq-ft coverage. 1hr dry time. 50 to 90°F application temp. 15oz can.

G3042137 **\$6.24**

**VALUE BRAND Portable 3-in-1 Unit**

Versatile unit jump-starts batteries, has an air compressor for flat tires and illuminates with LED task light. Rechargeable cordless unit has an "on/off" switch and reverse polarity indicator for safety. AC adapter allows charging from any standard outlet. Safety storage compartment prevents clamps from making unwanted contact. Features charge level lights and heavy-duty clamps and 25' 6 AWG cables. Powers spotlights, air compressors, radios, TVs, cellular phones, coolers and car vacs. For use in service stations, maintenance shops and farm/fleet applications. 500mA input and 15 A rated 12VDC socket. 20hr charge time. 13½" w x 6½" d x 14½" h.

■ UL STANDARDS  
G1986686 **\$98.99**

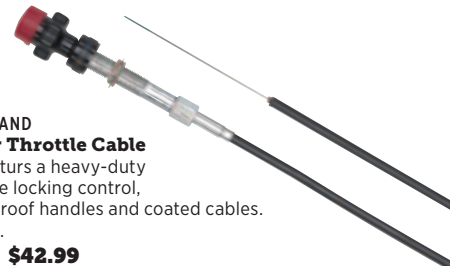

**VALUE BRAND Exterior Throttle Cable**

Cable features a heavy-duty adjustable locking control, weatherproof handles and coated cables. 15' length.

G3895875 **\$42.99**



**IDEAL Commutator Smoothie Resurfacing Tool**

Designed to smooth commutators of auto generators, starting motors and other similar equipment. Features 8½" plastic handle with one polish-grade and one finish-grade resurfacer on either end. 1½" w x ¾" d x 7/8" h resurfacers. Non-conductive.

G1423554 **\$17.26**

**VALUE BRAND Spark Plug Wire Tester**

Tester lights up when electrical current is detected. 20" length with 50" of test wire.

G1188564 **\$9.10**



**VALUE BRAND Brake Resetting Gauge**

Measures wear on drums from 6½" to 11½". Aids quick setup of shoe/drum clearance prior to reinstalling drum. Steel construction.

G3359307 **\$16.57**



**VALUE BRAND Ball Joint Spanner Wrench**

Install and remove adjusting sleeves on ball joints for ½-, ¾-, and 1-ton vehicles with Dana 44 open yoke front axles. Allows torquing with 1" socket for upper ball joint preload. For use with ½" driver tool. Carbon steel construction. 2½" length.

G2508651 **\$8.29**



**VALUE BRAND Combination Hitch**

Forged alloy steel construction is rust resistant. 2½" diameter trailer ball. 10 ton capacity.  
G4080912 **\$138.20**



**REESE Hitch Balls**

Select the correct ball for the coupler on your trailer. Chrome finish. ■ VESC STANDARDS  
▶ MORE ONLINE



#	capacity	ball	shank	price
G0587842	3,500lb	2"	¾" x 1½"	<b>\$9.80</b>
G1146887	3,500lb	2"	¾" x 2½"	<b>\$9.42</b>
G0442802	6,000lb	2"	1" x 2"	<b>\$10.11</b>
G3212876	6,000lb	2½"	1" x 2"	<b>\$13.42</b>



**DYNA Windshield Wiper Arms**

Wet pantograph arm includes adapter and instructions. For school bus or RV. Metal construction. ■ OEM STANDARDS

G2573961	24"	<b>\$47.73</b>
G1450653	26"	<b>\$52.95</b>
G3489841	28"	<b>\$56.24</b>
G2438992	31½"	<b>\$59.15</b>



**303 Windshield Washer Tablets**

Tablets clean road film, grime and bugs from windshield. Mix 1 tablet per 1 gallon of water. 32°F freezing point.

G1716784 25-pack **\$10.88**

**CRC Windshield De-Icer**

Melts ice, snow and frost from windshield, headlights and locks. 16 oz aerosol.

G2304391 **\$2.19**



**GROTE Jumper Cables**

Commercial-use booster cables feature parrot jaws and 20' 4AWG copper cables. 500A (max).  
G2517234 **\$121.84**

**REESE Trailer Light Kit**

Fits trailers under 80" wide. Square acrylic lenses. 12V bulbs. 4" w x 2" d x 4" h.

G3623252 kit **\$25.66**  
kit includes: marker lights, 25' harness, 4' connector



**BLUE MAGIC Headlight Lens Sealer**

Removes yellowing and restores clarity on both new and restored headlight lenses. Protects against UV rays. Seals out dirt and grime. 236 mL bottle.

G1242437 **\$4.79**

**CAMEL Radial Tire Repair Patches**

Professional-grade patches are ideal for permanent repairs. Rubber construction. 3¼" diameter.

▶ MORE SIZES ONLINE

G0252034 20-pack **\$10.19**



**CAMEL Plug-N-Patches**

Ideal for nail and screw hole emergency repairs. Round rubber construction with molded-in straight pin. 4.18" length. 1.88" diameter.

▶ MORE SIZES ONLINE

G1808292 20-pack **\$22.99**



**CORTINA Fleet Safety Kit**

For use in roadside emergencies. ■ CFR49 STANDARDS

G3440001 8-piece kit **\$102.99**  
kit includes: warning triangles (3), 2½ lb 10BC fire extinguisher, 30 min lightsticks (3), plastic case

4  
PIECE

**NUPLA Body Hammer Set**

Wood-handled hammers are ideal for auto body and sheet metal repair. Stored in carrying case. ■ ANSI STANDARDS

G1383627 4-piece set **\$116.77**  
set includes: curved pein finishing hammer, door skin hammer, general purpose pick hammer, pick/finishing hammer



**VALUE BRAND Parts Washer**

Fully flexible nozzle with fusible link automatically closes the lid in case of fire. For use with non-flammable water-based degreaser or cleaning agent. Features a components shelf. 20-gauge steel construction. 3½ gal capacity. 13½" w x 17" d x 9" h.

■ UL STANDARDS

G2054202 **\$71.99**



**VALUE BRAND Splash Guards**

Universal fit for HD trucks and trailers. Black Nyracord rubber construction.

**Classic**  
½" thickness.

G1481024 24" x 30" **\$13.66**  
G1783686 24" x 36" **\$14.59**

**Safety**

Features anti-spray performance. ½" thickness.

G2463361 24 x 30" **\$20.49**



**HIGHLAND Mud Guards**

BodyGuard splash guards feature a universal fit for noncommercial trucks, vans and SUVs. Includes mounting hardware. Molded rubber construction. 16" x 10".

G0252393 pair **\$19.50**





**MCR BearKat Safety Glasses**

Single wraparound lens design features scratch-resistant coating. Temple sleeves offer nonslip comfort. Polycarbonate lens and frame. 99.9% UV protection. Universal size.

■ ANSI STANDARDS

G4143772 gray lens **\$1.19**  
G4023083 indoor/outdoor lens **\$1.69**

**CHEMTRONICS Ultrajet 70 Duster**

Duster removes dust, dirt and other dry contaminants. For use on printed circuit boards, office equipment, A/V equipment, TV and VCR internals, lab instrumentation, medical devices, PLCs and contacts. Safe on plastics. Nonflammable. 10 oz aerosol.

G2305475 **\$9.19**



**CHEMTRONICS Flux-Off Rosin Remover**

Plastic-safe, brush-clean system removes rosin and rosin-based no-clean flux without CFCs, HCFCs, HAPs or nPB. Removes waxes and similar contaminants found in electronic manufacturing and repair. Flammable. 10 oz aerosol.

G0728235 **\$14.69**



**WELLER Soldering Gun Kit**

Trigger selection switch delivers high or low temperature output. Gun features a built-in lamp and 6' cord. 200 W.

G3325016 kit **\$43.30**

kit includes: pre-tinned copper tip, un-tinned copper tips (1 curved, 1 smooth), flux brush, soldering aid tool, coil of 40/60 rosin-core solder, blow molded carrying case

**BERNZOMATIC Brazing Torch**

Brazing torch features a trigger ignitor and swirl flame. For use on aluminum, brass and stainless steel. For use with propane or MAPP gas. ¼" to 6" MAPP gas soft solder. ½" to 3" propane gas soft solder. ¼" to 1½" MAPP gas silver braze. ¼" to ¾" propane gas silver braze.


G1104153 **\$35.46**



**BERNZOMATIC Brazing Alloy Rods**

Brazing alloys join similar or dissimilar metals together without melting base metal.

■ OSHA STANDARDS



**Bronze**

For use on high strength joints and overlap on steel, cast iron, copper, brass, bronze, yellow brass and galvanized parts. 1595 to 1620°F brazing range. ⅜" diameter. 18" length.

G1133194 25-pack **\$11.83**



**Copper Phosphorous**

90,000 psi tensile strength. 1310 to 1460°F brazing range. ⅜" diameter. 18" length.

G2663841 16-pack **\$16.49**

**SODER-WICK SD Desoldering Braid**

Desoldering braid is packaged in ESD-safe, static dissipative bobbins to minimize the risk of damage associated with static electricity. Size #3 (0.08"/2.0mm) for medium pads. 5' length. Green.

G0665524 **\$1.59**



**WELLER Analog Soldering Station**

Soldering station is temperature-controlled for continuous production soldering. Innovative heater/sensor combination provides rapid heatup and temperature recovery. 350 to 850°F analog temperature control. For use with Weller ET series soldering tips. 120 V. 50 W. 60Hz.

■ UL STANDARDS

G0743032 station **\$101.47**

station includes: power unit, pencil, tip, stand



**TURBOTORCH Air/Acetylene Kit**


Light-duty kit features quick-disconnect handles and tips. O-rings are color-coded for quick gas identification. Tips feature swirl combustion for higher target temperatures.

G0293885 kit **\$169.99**

kit includes: AR-B regulator, WA-400 handle, AH-12 hose, S-4 tip, instruction manual, gauge guard

**MILLER-SMITH Medium-Duty Regulator**

Series 30 single-stage regulator is for use with nitrogen gas cylinders. CGA 580 inlet connection. CGA ⅞"-20 flair outlet fitting. 4,000 psi inlet gauge. 600 psi outlet gauge. 450 psi delivery pressure range. 2" gauges. 4¾" overall length.



G1620656 **\$124.11**

**WORTHINGTON Lead-Free Solder**

For use in general plumbing and potable water applications. 1 lb spool. 0.118" diameter. ■ ASTM STANDARDS

**95% Tin, 5% Antimony**  
455 to 630°F melting range.

G1606841 **\$22.99**

**Tin, Copper, Silver**  
440 to 482°F melting range.

G2798537 **\$31.99**

**Tin, Copper, Selenium**  
410 to 418°F melting range.

G1703825 **\$22.99**



**WORTHINGTON Rosin-Core Leaded Solder**

For use on speaker wire, motors, appliances and general wiring applications. 445 to 500°F melting range. 1 lb spool. ■ ASTM STANDARDS

**60% Tin and 40% Lead**  
G2478463 0.031" diameter **\$23.99**  
G1360947 0.062" diameter **\$18.99**

**40% Tin and 60% Lead**  
G1206387 0.062" diameter **\$19.99**





**MILLER ELECTRIC Thunderbolt XL AC/DC Welder**

Stick welder offers a choice of AC or DC output. DC output means fewer arc outages, less sticking, less spatter and better control on thin work. AC output produces less arc blow and easier starts. Welder provides two wide AC amperage ranges with continuous adjustment.

Forced draft cooling fan provides extended life. 225/150 AAC. 230V input. 47.5 A input. 80 OCV. 20% duty cycle. 40 to 235A high. 30 to 150 A low. 12¾" w x 17½" d x 18¾" h.

G2265961 unit **\$649.30**  
unit includes: 15' No. 4 electrode cable with clamp, 10' work cable with clamp and 6' power cord with plug



**ARCAIR DC Copperclad Electrodes**

Copperclad electrodes are constructed of graphite, copper and carbon. The controlled copper coating improves electrical conductivity, providing more efficient and cooler operation, while helping maintain electrode diameter at the point of the arc. 12" length.

G0919651 ¼" diameter 50-pack **\$14.92**  
G0606383 ⅜" diameter 50-pack **\$15.46**  
G1285706 ⅝" diameter 50-pack **\$21.00**

**UNIWELD Soapstone**  
Soapstones produce highly visible layout lines on metal or concrete.

G1388091 flat  
G3352492 round  
144-pack **\$11.99**



**SPOTCHECK SKD-S2 Dye Penetrant Developer**

Developer is good for weld checks and offers 65 sq-ft coverage. 16 oz aerosol can. White.

G1221552 **\$14.42**



**SPOTCHECK SKC-S Dye Penetrant Remover**

Remover offers 65 sq-ft coverage. 16 oz aerosol can. Clear.

G3332944 **\$12.10**



**SPOTCHECK Dye Penetrant Kit**

4-step process helps detect leaks and stress and fatigue cracks in metal surfaces. For use on lifting devices, automotive parts, valves, pipes, pressure vessels and tanks. Great for tool shops, fire departments and amusement parks. Good for weld checks.

G1260612 kit **\$73.99**

kit includes: SKL-SP2 dye penetrant G2350537, SKD-S2 dye penetrant developer G1221552, SKC-S penetrant cleaner G3332944 (2), handy paint marker, hand wipes, instructions




**MILLER ELECTRIC Millermatic 212 MIG Welder**

Auto-Set allows quick and easy setup with spatter-free start. Welder features angled wire drive system and EZ-Change cylinder rack. Welds mild steel from 22-gauge to ⅜" thick and aluminum from 14-gauge

to ⅜" thick. 0.023" to 0.035" solid wire. 0.030" to 0.045" flux wire. 208/230V input. 31.2/27.1A input. 30 to 210 A output. 160A @ 24.5VDC rated output. 34.5 OCV. 60% duty cycle. 19" w x 40" d x 30" h.

■ CSA STANDARDS  
G1343072 unit **\$1963.08**

unit includes: 15' M-25 MIG gun, 10' work cable with clamp, argon mix regulator/flow gauge with 7' hose, power cord and plug, running gear and cylinder rack, 0.030/0.035" reversible dual groove drive rolls, contact tips, thickness gauge



**HOBART MIG Welding Wire**

Premium carbon steel wire for general-purpose welding is designed for use on mild steel. Deposits require minimal slag removal. Use with CO<sub>2</sub> or Argon-CO<sub>2</sub> shielding gas on clean or prepared surfaces. DC reverse polarity. 70 psi tensile strength (min).

**ER70S-2 Solid Wire**  
Primarily for single-pass applications on dirty or rusty steels.

G3520237 0.030" 2 lb **\$13.99**  
G3537965 0.035" 2 lb **\$13.99**  
G3520587 0.030" 11 lb **\$61.99**  
G3540442 0.035" 11 lb **\$60.99**

**ER70S-3 Solid Wire**  
For single- or multiple-pass applications on sheet metal.

G3533311 0.030" 2 lb **\$11.99**  
G3557337 0.035" 2 lb **\$11.99**  
G3547004 0.030" 11 lb **\$46.99**  
G3526311 0.035" 11 lb **\$44.99**

**ER70S-6 Solid Wire**  
For sheet metal or fabrication applications where a smooth weld bead is desired.

G3519923 0.025" 11 lb **\$43.99**  
G3523974 0.030" 11 lb **\$39.99**  
G3539916 0.035" 11 lb **\$34.99**  
G3520632 0.035" 33 lb **\$71.39**  
G3538421 0.045" 44 lb **\$86.99**

**VALUE BRAND Welding Bib Apron**

Leather welding clothing is made from Kevlar-sewn select cowhide. Steel rivet reinforcements are added to critical areas for increased wear. Bib apron provides chest-to-knee protection and secures around the neck and waist with webbing and snap buckle. 24" x 36".

G1571805 **\$17.99**



**STEINER Welding Screens**

Protect-O-Screens safely confine hazardous sparks, arcs or open flames. Enclosures can incorporate different panel materials, varying panel widths and are easily adapted or expanded. Sturdy freestanding frame is made from square-tube heavy-duty steel with a black corrosion-resistant finish. Transparent vinyl. ▶ MORE SIZES AND COLORS ONLINE

G0158575 6' x 6' (yellow) **\$74.99**  
G0158532 8' x 6' (orange) **\$99.99**



**MILLER ELECTRIC Welding Helmet**

Classic Series welding helmet features variable shades #3 and #8 to #12. 3.7" x 1.37" plate provides a 5.07 sq-in viewing area. Lens speed of 0.0001sec. Nylon construction with ratchet-style headgear. Includes AAA batteries (2), magnifying lens holder and lenses (5 outside, 2 inside).

G4578357 **\$83.49**

**FIBRE-METAL BY HONEYWELL Pipeliner Welding Helmet**

Welding helmet features impact-resistant fiberglass construction with neoprene strap headband. 4¼" x 2" plate with a shade 10 filter.

G0946845 **\$48.80**






MORE THAN 400,000 ITEMS ONLINE

**3M Abrasive Hand Pads**

Hand pads feature tough open construction with mineral throughout pads' thickness. Fast-cutting surface provides consistent finish for surfaces that need to be cleaned or finished by hand. Shape conforms to irregular work surfaces. Nonrusting pads can be used with water or solvents. Non-woven. 6" x 9".

▶ [MORE ONLINE](#)

G0511472	very fine—aluminum oxide	<b>\$1.09</b>
G1777142	medium—aluminum oxide	<b>\$2.32</b>
G0373511	medium—silicon carbide	<b>\$1.62</b>



**3M Surface Conditioning Discs**

Designed for use on right angle or vertical shaft grinders. Discs conform easily to work surfaces and resist loading. Nonwoven aluminum oxide abrasive. Choose the right grit for the job—coarse grit for deburring, medium grit for cleaning and blending, very fine grit for finishing.

▶ [MORE ONLINE](#)

**Hook-and-Loop Discs**

Hook-and-loop fastening system provides fast and easy disc changes. Discs lock securely to back-up pads by simply pressing the discs to the pads.


G2916654	2" (coarse)	<b>\$0.82</b>
G1229934	4" (coarse)	<b>\$2.69</b>
G3126401	7" (coarse)	<b>\$4.79</b>



**Roloc TR Locking Discs**

TR locking system provides fast and easy disc changes. Discs have rubber threaded hubs and are for use with TR back-up pads—sold separately.

G1200805	2" (very fine)	<b>\$0.89</b>
G2858606	2" (medium)	<b>\$0.89</b>
G1707562	2" (coarse)	<b>\$0.89</b>
G1709897	3" (very fine)	<b>\$1.69</b>
G1065687	3" (medium)	<b>\$1.69</b>
G1792445	3" (coarse)	<b>\$1.69</b>



**NORTON TR Disc Backup Pad**

Back-up disc pads with TR attaching system for quick-change use. Medium grade. ¼" back mounting size. ¼" shank diameter. ▶ [MORE SIZES ONLINE](#)

G0284882	2" (25,000 rpm)	<b>\$14.84</b>
G2417685	3" (20,000 rpm)	<b>\$19.99</b>



**3M Bristle Brush Discs**

Discs have bristles that conform to the contours of the workpiece without damaging base material. Designed to resist loading. Use with Roloc TR disc pads—sold separately. Ceramic aluminum oxide abrasive. ⅝" trim length. ▶ [MORE ONLINE](#)

G1046403	2" (50 grit—green)	<b>\$6.29</b>
G2230401	2" (80 grit—yellow)	<b>\$6.29</b>
G0664851	2" (120 grit—white)	<b>\$6.29</b>
G2564475	3" (50 grit—green)	<b>\$8.99</b>
G0508191	3" (80 grit—yellow)	<b>\$8.99</b>
G3382452	3" (120 grit—white)	<b>\$8.99</b>



**FLEX-HONE TOOL Honing Brushes**

Resilient, flexible honing tools provide soft cutting action and remove burrs from cross-drilled holes. Independent suspension ensures self-centering, self-aligning to the bore and self-compensating for wear. Compatible with automated and CNC equipment to automate the deburring process. Use for finishing work on any type and size of cylinder. Silicon carbide abrasive. 240 grit. 13½" length. ▶ [MORE ONLINE](#)

**GB Series**

For block cylinders in standard applications.

②#	bore dia	hone length	price
G1677417	3¼"	3½"	<b>\$36.98</b>
G1550333	3½"	3½"	<b>\$32.99</b>
G1587512	3¾"	3½"	<b>\$30.99</b>
G3316862	4¾"	4"	<b>\$41.12</b>



**GBD Series**

For block cylinders in heavy-duty applications.

②#	bore dia	hone length	price
G0792531	4"	6"	<b>\$57.99</b>

**ARC ABRASIVES**

**Mounted Flap Wheels**

Flexible abrasive flaps contour to the work surface. Ideal for smaller portable tools and flexible shaft machines where maximum reach and easy access are needed. Great for ferrous and nonferrous metals on cylindrical and contoured profiles. Aluminum oxide abrasive. 25,000rpm (max). 1½" diameter. 1" width. ¼" shank diameter. ▶ [MORE ONLINE](#)

G0691101	40 grit	<b>\$1.89</b>
G1147955	60 grit	<b>\$1.99</b>
G2153977	80 grit	<b>\$2.29</b>
G3396407	120 grit	<b>\$2.29</b>
G2375423	180 grit	<b>\$1.99</b>



**MERIT Mounted Flap Wheels**

Flap wheels are designed to conform to most shapes. For use with die grinders, portable drills and air tools. Hardened steel mandrel is permanently mounted in epoxy core. Aluminum oxide abrasive. 1" width. ¼" shank diameter. ▶ [MORE ONLINE](#)

1" Diameter	2" Diameter
30,000rpm (max).	25,000rpm (max).
G0400373 60 grit	G2932203 60 grit
G3089152 80 grit	G2403554 80 grit
G3238611 120 grit	G1020853 120 grit
each <b>\$2.29</b>	each <b>\$3.59</b>

**MERIT Type 29 Flap Discs**

Flap discs feature zirconium aluminum oxide abrasive with fiberglass backing. 13,300rpm (max). 4½" diameter. ⅝" arbor hole.

G0805917	40 grit	
G2539214	60 grit	
G2389947	80 grit	
	each	<b>\$3.39</b>




**NORTON Tufbak Durite T414 Sanding Sheets**

Sandpaper sheets for wet sanding between coats of primer or other finishes on wood or metal. Silicon carbide abrasive with A-weight waterproof paper backing. 9" x 11".

▶ [MORE ONLINE](#)

G1154781	220 grit	50-pack	<b>\$37.99</b>
G1121102	280 grit	50-pack	<b>\$37.99</b>
G1702671	320 grit	50-pack	<b>\$25.99</b>
G3194432	400 grit	50-pack	<b>\$37.92</b>
G1335476	500 grit	50-pack	<b>\$37.99</b>
G1838654	600 grit	50-pack	<b>\$32.99</b>



**NORTON Metalite R228 Abrasive Belts**

For use with benchstand grinders on wood and metal. Aluminum oxide with X-weight cloth backing. ▶ [MORE ONLINE](#)


G3364602	1" x 42" (80 grit)	<b>\$1.29</b>
G1968653	1" x 42" (120 grit)	<b>\$1.09</b>
G2700634	2" x 48" (60 grit)	<b>\$3.09</b>
G0456477	2" x 48" (80 grit)	<b>\$2.09</b>
G3246047	6" x 48" (80 grit)	<b>\$7.69</b>
G1226057	6" x 48" (120 grit)	<b>\$5.99</b>



**NORTON Norzon Plus R821 Abrasive Belts**

For use with benchstand grinders on nonferrous metals, glass and ceramics. Zirconia aluminum oxide abrasive with Y-weight cloth backing. 6" x 48". ▶ [MORE ONLINE](#)

G2830651	36 grit	<b>\$10.29</b>
G0791436	40 grit	<b>\$9.49</b>
G3125062	50 grit	<b>\$8.49</b>
G2773206	60 grit	<b>\$8.49</b>
G1730924	80 grit	<b>\$7.83</b>



**NORTON No-Fil Adalox A290 Paper Discs**

Pressure-sensitive adhesive (PSA) backing enables quick disc changes. Stearate coating reduces disc loading. For use on random orbital and rotary sanders for all-purpose dry sanding and finishing applications. Disc rolls are used with PSA back-up pads—sold separately. Aluminum oxide abrasive provides consistent finishes. Heavy C-weight paper backing resists edge tearing. ▶ [MORE ONLINE](#)


5" Diameter	5" Diameter	6" Diameter
G0276841 60 grit	100/roll	<b>\$23.99</b>
G2220592 80 grit	100/roll	<b>\$23.13</b>
G2489627 120 grit	100/roll	<b>\$24.59</b>
G0871945 60 grit	100/roll	<b>\$29.88</b>
G1674705 80 grit	100/roll	<b>\$28.79</b>
G3145405 120 grit	100/roll	<b>\$27.89</b>



**NORTON Metalite R228 PSA Cloth Discs**

For maintenance and repair applications, from medium grinding to light deburring and finishing. Pressure-sensitive adhesive (PSA) offers fast, convenient disc mounting. Discs are made without center holes for full-face usage. Premium aluminum oxide abrasive with heavy X-weight cloth backing is resistant to tearing and heat. 12" diameter. ▶ [MORE ONLINE](#)

G0694321	60 grit	<b>\$5.16</b>
G2934102	80 grit	<b>\$5.25</b>
G0909736	120 grit	<b>\$4.51</b>



**CLESCO Wheel Mandrel Adapters**

Screw-type wheel mandrel adapters are machined from stressproof steel. Screw head is slotted for fast, easy change. Design holds wheel flush and permits wheel to be held close to work area. For use with cut-off wheels with a maximum thickness of 1/4", 3/4" washer outer diameter. 1/4" shank diameter. 2" length.

- G2428273 fits 1/4" hole **\$3.47**
- G1285882 fits 3/8" hole **\$5.29**
- G1311554 fits 1/2" or 3/4" hole **\$5.99**



**NORTON Type 27 Gemini Grinding Wheels**

Type 27 wheels are designed for use on right-angle grinders. Aggressively remove material by grinding on the periphery. Notching wheels cut on the face of the wheel for cleaning weld joints or cutting out weld for pipe repair. Depressed center. Aluminum oxide abrasive. 13,580 rpm (max). 4 1/2" diameter. 1/4" thickness.



**24 Grit Grinding Wheels**

For stainless steel, steel and other ferrous metals.

- G3279412 3/8" arbor hole **\$1.86**
- G3481572 1/2"-11 arbor hole **\$2.93**


**46 Grit Grinding Wheels**

For aluminum and soft metals.

- G1018026 3/8" arbor hole **\$6.49**
- G0666522 1/2"-11 arbor hole **\$5.39**

**NORTON Type 27 Gemini Cut-Off Wheels**

Type 27 wheels are designed for use on right-angle grinders. Wheels aggressively remove material by grinding on the periphery. Notching wheels cut on the face of the wheel for cleaning weld joints or cutting out weld for pipe repair. Aluminum oxide abrasive. For stainless steel, steel and other ferrous metals. 24 grit. 0.045" thickness. 7/8" arbor hole.



- G0322752 4 1/2" (13,580 rpm) **\$1.59**
- G3072937 5" (12,225 rpm) **\$1.89**
- G0845932 6" (10,185 rpm) **\$1.99**

**NORTON Metalite K225 Abrasive Rolls**

Rolls can be torn to exact lengths as needed, eliminating waste. For use in polishing, light deburring, blending, removing rust and scale, fine sanding and polishing applications. Aluminum oxide abrasive. J-weight cloth backing. 2" x 50yd roll.



- G2906224 80 grit
- G1938264 100 grit
- G1791081 120 grit
- G2119695 150 grit
- G0577665 180 grit
- G3040484 220 grit
- G0891773 240 grit
- G0266323 320 grit
- each **\$29.99**

**VALUE BRAND Deburring Tool Kits**

Tools are for use on inner and outer straight and hole edges to remove burrs and other surface defects. Blade holder extends from 1/2" to 5". Features blade storage in handle.

**B Series Deburring Tool Kit**

Use B-10 blades on steel, aluminum and copper. B-20 blades can be used both clockwise and counterclockwise on brass and cast iron. Blades can be inserted at 90°.

- G1532763 kit **\$9.78**
- kit includes: handle with depress-type locking button, blades (B-10, B-20)



**E Series Deburring Tool Kit**

Ideal for small, hard-to-reach applications. E-100 blades are for use on steel, aluminum and copper. E-200 blades can be used both clockwise and counterclockwise on materials with powder chips, brass and cast iron.

- G2007135 kit **\$11.53**
- kit includes: handle, telescoping blade holder, blades (E-100, E-200, E-300)



**MAXUS Siphon-Feed Portable Sandblasters**

Portable sandblasters are ideal for removing rust, scale, paint, and dirt from metals, wood, brick and stone. Siphon-feed blasters feature durable polyethylene hoppers and are recommended for small projects. Includes hose, blast gun and 3/16" ceramic nozzle. Polyethylene construction. 40 to 125 psi. 6.2cfm @ 80 psi.



- G3342211 30 lb hopper capacity **\$59.89**
- G2550703 60 lb hopper capacity **\$101.99**

**VALUE BRAND Pressure-Feed Sandblaster**

Portable abrasive blasters are ideal for removing rust, scale, paint, and dirt from metals, wood, brick and stone. Pressure-feed blaster features a steel hopper. Includes and 8' hose, blast gun and ceramic nozzles (4). 65 to 125 psi. 9cfm @ 80 psi. 125 lb hopper capacity.



- G3953293 **\$234.97**

**BALLOTINI Glass Bead Blast Media**

Use with abrasive blast finishing equipment in cleaning, deburring, finishing and peening applications. Round, smooth media leaves a peen finish while sharp, jagged media leaves an etched or matte finish. The harder the material, the deeper the media will penetrate and the faster it will work. Spherical shape is ideal for use on soft materials where tolerances must be maintained. Contains no free silicas and leaves no residue.



- G1248895 fine (US sieve 100 to 170)
- G3365415 medium (US sieve 70 to 140)
- G2903022 coarse (US sieve 60 to 120)
- 53lb bucket **\$52.49**



**DAYTON Bench Buffer**

Bench-top buffer is ideal for buffing and polishing all types of metal. Equipped with a long-life capacitor motor and large diameter armature shaft with sealed ball bearings. Includes wheel flanges and power cord. 2,000 to 3,300 rpm. 3/4 HP. 115 V. 8" buffer. 5/8" shaft.

- G2894464 **\$184.05**



**DAYTON Buffing Compound Bars**

Buffing compound bars are for use in various applications. 580 to 620g bars.

#	color	for use on	qty	price
		chrome, iron,		
G2116545	white	stainless steel	4	<b>\$11.53</b>
		brass, gold,		
G0491827	red	platinum, silver	4	<b>\$11.98</b>
G1667863	black	iron, steel	4	<b>\$12.00</b>



**DAYTON Bench Grinder**

Heavy-duty bench grinders is equipped with a totally enclosed ball bearing motor. Removable wheel guards allow for easy changing of wheels. Tool rests are adjustable for wheel wear and angle grinding. Grinders come complete with spark arrestors, safety eye shields and a dust collection hose. Includes grinding wheels (36-grit, 60-grit). 3,450 rpm (max). 3/4 HP. 115/230 V. 21" length. 13" height.

- G1762144 **\$225.55**

**DAYTON Eye Shield Kit**

Polycarbonate eye shield kit is for use with most bench grinders.


- G2894455 kit **\$13.37**
- kit includes: plexi eyeshields (2), lower eyeshield brackets (2), 10-24 x 3/8" pan head screws (4)



**DAYTON Bench Grinder and Buffer Stand**

Bench stand is constructed of heavy cast iron with a steel column and is designed for use with most bench grinders and buffers. 10" x 11" cast iron top is provided with slots and holes for secure mounting. A waterpot is included for quenching workpiece after grinding. 14 1/2" x 16 1/4" base. 31 3/4" height.

- G0993937 **\$131.56**

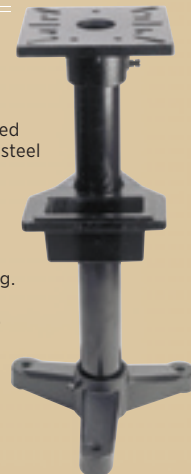



RED HEAD

**Trubolt Wedge Anchors**

Wedge anchors are fully threaded with one-piece wraparound stainless steel expander clip. For use in concrete. For increased load value, use deeper embedment (2 1/4" minimum). Carbon steel construction. Includes nuts and washers. 4,760 lb shear in 4,000 psi concrete. 5,100 lb tension in 4,000 psi concrete. 1/2" diameter. 1/2-13 thread. ■ **UL, US GOVERNMENT STANDARDS**



Z#	anchor length	thread length	max work thickness	qty	price
G2384855	4 3/4"	2 3/4"	1 1/2"	25	<b>\$15.79</b>
G0778197	5 1/2"	3"	2 3/4"	25	<b>\$15.74</b>

VALUE BRAND

**Hammer-Drive Pin Anchor Sets**

Hammer-drive anchors and pins can be used in concrete, block or brick applications. 3/4" embedment (min). Zamac construction. 1/4" anchor diameter. ■ **US GOVERNMENT STANDARDS** ▶ **MORE SIZES ONLINE**



Z#	anchor length	max work thickness	qty	price
G4267374	1"	3/4"	100	<b>\$11.34</b>
G4264495	1 1/4"	1"	100	<b>\$12.80</b>
G4262702	1 1/2"	1 1/4"	100	<b>\$14.95</b>
G4261205	2"	1 3/4"	100	<b>\$18.13</b>

VALUE BRAND **Conical Screw Anchor**

Conical screw anchors are ideal for light-duty applications with hollow walls, brick and block. Polyethylene construction. Corrosion resistant.



Z#	size	screw length	drill size	qty	price
G4275397	#6 to #8	3/4"	5/16"	100	<b>\$1.09</b>
G4266342	#8 to #10	7/8"	3/16"	100	<b>\$1.18</b>
G3901414	#10 to #12	1"	3/4"	100	<b>\$1.18</b>
G4271897	#14 to #16	1 3/8"	3/16"	50	<b>\$1.03</b>



VALUE BRAND **Plug Anchors**

Plug anchors are ideal for light-duty applications with hollow block, brick, drywall and concrete. Polyethylene construction. #10 to #12 screw size. 9/32" drill size. Includes #10-12 x 1 3/4" screws and a 9/32" drill bit. ▶ **MORE ONLINE**

G4268363 50-pack **\$12.40**

RED HEAD

**Phillips Anchors**

Phillips anchors are for light-duty applications. Includes plastic anchors and 8-32 carbon steel screws. 40lb ultimate tension in 4,000 psi concrete (min). 3/8" wall thickness. 1 1/4" anchor length. ■ **ASTM STANDARDS**



G4306723 25-pack **\$6.19**



1825  
PIECE

VALUE BRAND **Self-Drilling Screw Assortment**

Self-drilling screw assortment features hex washer-head screws in a convenient metal case that fits in Durham Parts Cabinet #G2217004. Steel construction with zinc finish. ▶ **MORE ONLINE**

G1993607 1,825-piece assortment **\$128.31**  
 assortment includes: #6 x 1/2" (100), #8 x 1/2" (100), #8 x 3/4" (100), #8 x 1" (100), #8 x 1 1/4" (100), #8 x 1 1/2" (100), #10 x 1/2" (100), #10 x 3/4" (100), #10 x 1" (100), #10 x 1 1/4" (100), #10 x 1 1/2" (100), #12 x 3/4" (100), #12 x 1" (100), #12 x 1 1/2" (100), 1/4" x 3/4" (100), 1/4" x 1" (100), 3/4" x 1 1/2" (100), #6 x 3/4" (50), #6 x 1" (50), #12 x 1 1/4" (25)

VALUE BRAND **Cap Screw Assortment**

Cap screw assortment features hex-head cap screws, nuts and washers in a convenient metal case that fits in Durham Parts Cabinet #G2217004. Grade 8 USS steel construction with yellow zinc finish. ▶ **MORE ONLINE**

G0263453 941-piece assortment **\$128.31**  
 assortment includes: screws {3/4-20 x 1/2" (100), 3/4-20 x 3/4" (10), 3/4-20 x 1" (10), 3/4-20 x 1 1/2" (10), 3/4-20 x 2" (10), 3/16-18 x 3/4" (10), 3/16-18 x 1" (10), 3/16-18 x 1 1/4" (10), 3/16-18 x 1 1/2" (10), 3/16-18 x 2" (10), 3/16-16 x 3/4" (10), 3/16-16 x 1" (8), 3/16-16 x 1 1/4" (8), 3/16-16 x 1 1/2" (5), 3/16-16 x 2" (5)}, lock washers {3/4" (45), 3/8" (40), 3/16" (30)}, hex nuts {3/4-20 (100), 3/16-18 (100), 3/16-16 (100)}, flat washers {3/4" (100), 3/8" (100), 3/16" (100)}



941  
PIECE



253  
PIECE

VALUE BRAND **Self-Drilling Screw Assortment**

Self-drilling and tapping screw assortment features pan-head, hex washer-head screws and multiple drivers in a convenient plastic hanging pack. Carbon steel construction with zinc finish.

G1695005 253-piece assortment **\$40.32**  
 assortment includes: phillips pan-head screws {6-20 x 3/8" (25), 8-18 x 1/2" (25)}, hex washer-head screws {8-18 x 1/2" (60), 10-16 x 3/4" (45), 8-18 x 3/4" (35), 10-16 x 1/2" (25), 8-18 x 1" (20), 12-14 x 3/4" (15)}, drive bits {#2 phillips (1), 3/4" hex (1), 3/16" hex (1)}



1150  
PIECE

VALUE BRAND **Machine Screw Assortment**

Machine screw assortment features round-head machine screws, nuts and washers in a convenient plastic hanging pack. Steel construction with zinc finish. ▶ **MORE ONLINE**

G1962527 1,150-piece assortment **\$32.99**  
 assortment includes: machine screws {6-32 x 1/2" (30), 6-32 x 3/4" (25), 8-32 x 1/2" (25), 10-24 x 1/2" (25), 8-32 x 3/4" (20), 10-24 x 3/4" (20), 6-32 x 1" (15), 8-32 x 1" (15), 10-24 x 1/2" (15), 10-24 x 3/4" (15), 10-24 x 1" (15), 10-32 x 1" (15), 3/4"-20 x 3/4" (12), 3/4"-20 x 1" (10), 3/4"-20 x 1 1/2" (6), 10-24 x 1 1/2" (4)}, hex nuts {6-32 (82), 8-32 (75), 10-24 (75), 10-32 (60), 3/4"-20 (35)}, lock washers {#6 (88), #8 (85), #10 (85), 3/4" (35)}, flat washers {#6 (88), #8 (85), #10 (85), 3/4" (35)}

GREENLEE **Screw Anchor Expanders**

Screw anchor expanders are ideal for setting caulking screw anchors. Hardened alloy steel construction.

G1922042 1/4-20 thread **\$43.99**  
 G0529557 3/8-16 thread **\$66.49**





**VALUE BRAND**

**Hairpin Cotter Pins**

Also known as bridge pins or hitch pin clips, hairpin cotter pins are reusable and ideal for quick assembly and disassembly. Used commonly with clevis pins. Steel construction with zinc finish. ■ ANSI, ASME STANDARDS

► MORE ONLINE

Q #	wire dia	length	fits shaft	qty	price
G1193577	0.042"	1 <sup>3</sup> / <sub>16</sub> "	3 <sup>1</sup> / <sub>16</sub> " to 1/4"	100	<b>\$3.14</b>
G0475544	0.059"	1 <sup>1</sup> / <sub>2</sub> "	1/4" to 3 <sup>1</sup> / <sub>16</sub> "	100	<b>\$3.46</b>
G1278243	0.073"	1 <sup>7</sup> / <sub>16</sub> "	3 <sup>1</sup> / <sub>16</sub> " to 3/8"	100	<b>\$3.12</b>
G2757404	0.120"	2 <sup>3</sup> / <sub>16</sub> "	1/2" to 3/8"	50	<b>\$5.65</b>
G2178757	0.148"	2 <sup>13</sup> / <sub>16</sub> "	3/8" to 3/4"	50	<b>\$7.30</b>
G0837146	0.178"	3 <sup>3</sup> / <sub>4</sub> "	3/8" to 1"	25	<b>\$7.75</b>
G0973971	0.243"	5"	1 <sup>1</sup> / <sub>2</sub> " to 1 <sup>1</sup> / <sub>2</sub> "	10	<b>\$7.80</b>



**ITW BEE LEITZKE**

**Cotterless Ring Pins**

Also known as detent or quick-release pins, ring pins feature a ball detent locking mechanism. C1215/C1018 steel construction with zinc finish.

Q #	pin diameter	length	usable length	qty	price
G1877425	3 <sup>1</sup> / <sub>16</sub> "	1"	1 <sup>3</sup> / <sub>16</sub> "	10	<b>\$10.21</b>
G1271654	3 <sup>1</sup> / <sub>16</sub> "	1 <sup>1</sup> / <sub>2</sub> "	1 <sup>1</sup> / <sub>16</sub> "	10	<b>\$10.29</b>
G1532675	3/4"	1 <sup>1</sup> / <sub>2</sub> "	1 <sup>1</sup> / <sub>4</sub> "	10	<b>\$11.56</b>
G0453433	3/4"	2"	1 <sup>3</sup> / <sub>4</sub> "	10	<b>\$11.75</b>
G1684925	3/4"	2 <sup>1</sup> / <sub>2</sub> "	2 <sup>1</sup> / <sub>4</sub> "	10	<b>\$11.34</b>
G2889284	3/8"	2"	1 <sup>5</sup> / <sub>8</sub> "	10	<b>\$12.96</b>
G1989014	3/8"	2 <sup>1</sup> / <sub>2</sub> "	2 <sup>1</sup> / <sub>8</sub> "	10	<b>\$13.45</b>
G2103972	3/8"	3"	2 <sup>5</sup> / <sub>8</sub> "	10	<b>\$14.15</b>

**260  
PIECE**



**VALUE BRAND Washer Assortment**

Washer assortment features flat and split-lock washers in a convenient plastic hanging pack. Steel construction with zinc finish.

■ ASME STANDARDS

G2063747 260-piece assortment **\$24.94**

assortment includes: flat washers {#10 (50), 1/4" (30), 3/16" (25), 3/8" (25), 1/2" (20), 5/8" (15)}, split-lock washers {#10 (50), 1/4" (25), 3/16" (20), 3/8" (20), 1/2" (16), 5/8" (14)}, plastic hanging pack

**MICRO PLASTICS Hose Clamps**

Hose clamps feature black nylon construction. -40° to 185°F.

Q #	width	thickness	clamping diameter	qty	price
G0607661	0.219"	0.062"	0.475" to 0.536"	10	<b>\$1.62</b>
G3209814	0.219"	0.062"	0.670" to 0.780"	10	<b>\$1.82</b>
G2454575	0.230"	0.070"	0.702" to 0.801"	10	<b>\$1.69</b>
G1644684	0.250"	0.070"	0.990" to 1.135"	10	<b>\$1.99</b>



**CHICAGO HARDWARE Eyebolts**

Turned-wire eyebolts feature steel construction with a zinc finish. Includes hex nut. ► MORE ONLINE

Q #	thread size	eye ID	shank dia	shank length	length	qty	price
G1678896	3/4-20	1/2"	3/4"	1"	2"	10	<b>\$2.29</b>
G1826465	3/4-20	3/2"	3/4"	2"	3"	10	<b>\$2.49</b>
G3477241	3/4-20	3/2"	3/4"	3"	4"	10	<b>\$2.99</b>
G2452432	3/8-16	3/4"	3/8"	2"	3 <sup>1</sup> / <sub>2</sub> "	10	<b>\$4.99</b>
G0701181	3/8-16	3/4"	3/8"	4"	5 <sup>1</sup> / <sub>2</sub> "	10	<b>\$8.59</b>



**VALUE BRAND Binding Posts**

Truss-head binding posts feature aluminum construction with an unslotted drive. Includes slotted truss-head screw. B38 Rockwell hardness. 34,800 psi tensile strength (min). 8-32 thread. ► MORE ONLINE

Q #	barrel length	barrel thread	screw thread	length	qty	price
G0888571	3/4"	3/16"	3/16"	50	50	<b>\$8.52</b>
G0930361	1"	3/8"	3/4"	25	25	<b>\$5.48</b>
G2232772	1 <sup>1</sup> / <sub>4</sub> "	3/8"	3/4"	25	25	<b>\$6.09</b>
G2556583	3"	3/8"	3/4"	10	10	<b>\$5.37</b>

**VALUE BRAND**

**Thread Measuring Gage**

Thread measuring gauge features calibrated holes and molded thread profiles to help accurately identify wire gauge, thread style and length of threaded fasteners. Measures screws, bolts, nuts, washers and wire size. Steel construction. 3.3"w x 0.9"d x 37"h.

**MEASURES:**

- wire length—0" to 6" and 0 to 150mm
  - wire diameter—#0 to #14
  - UNC threads—6-32, 8-32, 10-24, 1/4-20, 3/16-18, 3/8-16, 1/2-14, 3/4-13
  - UNF threads—10-32, 1/4-28, 3/8-24, 1/2-20, 3/4-18, 1-14
  - Metric threads—4 to 12mm standard, fine, extra fine
- G2491291 **\$42.99**



**VALUE BRAND**

**Rod Coupling Nuts**

Standard coupling nuts feature UNC threads and steel construction with a zinc finish. Right-hand thread direction. B68-C32 Rockwell hardness. 60,000 psi tensile strength (min).

Q #	thread	width	length	qty	price
G2358011	10-24	3/16"	3/4"	20	<b>\$2.53</b>
G0555974	1/4-20	3/8"	7/8"	20	<b>\$2.55</b>
G2751052	3/8-16	3/8"	1 <sup>1</sup> / <sub>4</sub> "	8	<b>\$3.46</b>

**VALUE BRAND**

**Threaded Rods**

Acme threaded rods are ideal for quick assembly and adjustments. Length can be customized with a hacksaw or a band saw. Right-hand thread direction. Low-carbon steel construction. Class 2G threads. B70 Rockwell hardness. 60,000 psi tensile strength (min). 45,000 psi yield strength (min). 3' length.

G1605527 1/2-10 thread **\$6.99**  
G1456664 3/4-6 thread **\$14.15**







200  
PIECE

**ITW BEE LEITZKE Set Screw Assortment**  
Socket set-screw assortment features cup-point screws in a convenient plastic hanging pack. Steel construction.

**G2012193** 200-piece assortment **\$34.64**  
assortments includes: ¼-20 x ¼" (30), ⅜-18 x ⅜" (30), ¼-20 x ⅜" (20), ¼-28 x ¼" (20), ⅜-18 x ½" (20), ⅜-24 x ⅜" (20), 5-40 x ⅜" (10), 8-32 x ⅜" (10), ⅜-24 x ¼" (10), ⅜-16 x ⅜" (10), ⅜-16 x ½" (10), ⅜-24 x ⅜" (10)

**LOCTITE Threadlocker 243**  
Medium-strength primerless formula is used to fill gaps between threads and securely mate surfaces to form solid, unitized assemblies. Removable with hand tools. For use on ¼" to ¾" fasteners. 10 min fixture time. 24 hr full cure. 10 mL bottle. Blue. ■ NSF STANDARDS ▶ MORE SIZES ONLINE  
G0366222 **\$10.48**



**WIHA TOOLS Security Bit Set**

Security bit set includes a variety of screwdriver bits in a handy storage case.

**G1093251** 39-piece set **\$61.99**  
set includes: tamper-resistant torx (TR8, TR10, TR15, TR20, TR25, TR27, TR30, TR40), triwing (#1, #2, #3, #4), torq set (#6, #8, #10), spanner (#4, #6, #8, #10), tamper-resistant hex (⅜", ½", ⅝", ¾", ⅞", 1", 1 ¼", 1 ½", 1 ¾", 1 ⅝", 1 ⅞", 2", 2 ¼", 2 ½", 2 ¾", 2 ⅝", 2 ⅞", 3", 3 ¼", 3 ½", 3 ¾", 3 ⅝", 3 ⅞", 4", 4 ¼", 4 ½", 4 ¾", 4 ⅝", 4 ⅞", 5", 5 ¼", 5 ½", 5 ¾", 5 ⅝", 5 ⅞", 6", 6 ¼", 6 ½", 6 ¾", 6 ⅝", 6 ⅞", 7", 7 ¼", 7 ½", 7 ¾", 7 ⅝", 7 ⅞", 8", 8 ¼", 8 ½", 8 ¾", 8 ⅝", 8 ⅞", 9", 9 ¼", 9 ½", 9 ¾", 9 ⅝", 9 ⅞", 10", 10 ¼", 10 ½", 10 ¾", 10 ⅝", 10 ⅞", 11", 11 ¼", 11 ½", 11 ¾", 11 ⅝", 11 ⅞", 12", 12 ¼", 12 ½", 12 ¾", 12 ⅝", 12 ⅞", 13", 13 ¼", 13 ½", 13 ¾", 13 ⅝", 13 ⅞", 14", 14 ¼", 14 ½", 14 ¾", 14 ⅝", 14 ⅞", 15", 15 ¼", 15 ½", 15 ¾", 15 ⅝", 15 ⅞", 16", 16 ¼", 16 ½", 16 ¾", 16 ⅝", 16 ⅞", 17", 17 ¼", 17 ½", 17 ¾", 17 ⅝", 17 ⅞", 18", 18 ¼", 18 ½", 18 ¾", 18 ⅝", 18 ⅞", 19", 19 ¼", 19 ½", 19 ¾", 19 ⅝", 19 ⅞", 20", 20 ¼", 20 ½", 20 ¾", 20 ⅝", 20 ⅞", 21", 21 ¼", 21 ½", 21 ¾", 21 ⅝", 21 ⅞", 22", 22 ¼", 22 ½", 22 ¾", 22 ⅝", 22 ⅞", 23", 23 ¼", 23 ½", 23 ¾", 23 ⅝", 23 ⅞", 24", 24 ¼", 24 ½", 24 ¾", 24 ⅝", 24 ⅞", 25", 25 ¼", 25 ½", 25 ¾", 25 ⅝", 25 ⅞", 26", 26 ¼", 26 ½", 26 ¾", 26 ⅝", 26 ⅞", 27", 27 ¼", 27 ½", 27 ¾", 27 ⅝", 27 ⅞", 28", 28 ¼", 28 ½", 28 ¾", 28 ⅝", 28 ⅞", 29", 29 ¼", 29 ½", 29 ¾", 29 ⅝", 29 ⅞", 30", 30 ¼", 30 ½", 30 ¾", 30 ⅝", 30 ⅞", 31", 31 ¼", 31 ½", 31 ¾", 31 ⅝", 31 ⅞", 32", 32 ¼", 32 ½", 32 ¾", 32 ⅝", 32 ⅞", 33", 33 ¼", 33 ½", 33 ¾", 33 ⅝", 33 ⅞", 34", 34 ¼", 34 ½", 34 ¾", 34 ⅝", 34 ⅞", 35", 35 ¼", 35 ½", 35 ¾", 35 ⅝", 35 ⅞", 36", 36 ¼", 36 ½", 36 ¾", 36 ⅝", 36 ⅞", 37", 37 ¼", 37 ½", 37 ¾", 37 ⅝", 37 ⅞", 38", 38 ¼", 38 ½", 38 ¾", 38 ⅝", 38 ⅞", 39", 39 ¼", 39 ½", 39 ¾", 39 ⅝", 39 ⅞", 40", 40 ¼", 40 ½", 40 ¾", 40 ⅝", 40 ⅞", 41", 41 ¼", 41 ½", 41 ¾", 41 ⅝", 41 ⅞", 42", 42 ¼", 42 ½", 42 ¾", 42 ⅝", 42 ⅞", 43", 43 ¼", 43 ½", 43 ¾", 43 ⅝", 43 ⅞", 44", 44 ¼", 44 ½", 44 ¾", 44 ⅝", 44 ⅞", 45", 45 ¼", 45 ½", 45 ¾", 45 ⅝", 45 ⅞", 46", 46 ¼", 46 ½", 46 ¾", 46 ⅝", 46 ⅞", 47", 47 ¼", 47 ½", 47 ¾", 47 ⅝", 47 ⅞", 48", 48 ¼", 48 ½", 48 ¾", 48 ⅝", 48 ⅞", 49", 49 ¼", 49 ½", 49 ¾", 49 ⅝", 49 ⅞", 50", 50 ¼", 50 ½", 50 ¾", 50 ⅝", 50 ⅞", 51", 51 ¼", 51 ½", 51 ¾", 51 ⅝", 51 ⅞", 52", 52 ¼", 52 ½", 52 ¾", 52 ⅝", 52 ⅞, 53", 53 ¼", 53 ½", 53 ¾", 53 ⅝", 53 ⅞, 54", 54 ¼", 54 ½", 54 ¾", 54 ⅝", 54 ⅞, 55", 55 ¼", 55 ½", 55 ¾", 55 ⅝", 55 ⅞, 56", 56 ¼", 56 ½", 56 ¾", 56 ⅝", 56 ⅞, 57", 57 ¼", 57 ½", 57 ¾", 57 ⅝", 57 ⅞, 58", 58 ¼", 58 ½", 58 ¾", 58 ⅝", 58 ⅞, 59", 59 ¼", 59 ½", 59 ¾", 59 ⅝", 59 ⅞, 60", 60 ¼", 60 ½", 60 ¾", 60 ⅝", 60 ⅞, 61", 61 ¼", 61 ½", 61 ¾", 61 ⅝", 61 ⅞, 62", 62 ¼", 62 ½", 62 ¾", 62 ⅝", 62 ⅞, 63", 63 ¼", 63 ½", 63 ¾", 63 ⅝", 63 ⅞, 64", 64 ¼", 64 ½", 64 ¾", 64 ⅝", 64 ⅞, 65", 65 ¼", 65 ½", 65 ¾", 65 ⅝", 65 ⅞, 66", 66 ¼", 66 ½", 66 ¾", 66 ⅝", 66 ⅞, 67", 67 ¼", 67 ½", 67 ¾", 67 ⅝", 67 ⅞, 68", 68 ¼", 68 ½", 68 ¾", 68 ⅝", 68 ⅞, 69", 69 ¼", 69 ½", 69 ¾", 69 ⅝", 69 ⅞, 70", 70 ¼", 70 ½", 70 ¾", 70 ⅝", 70 ⅞, 71", 71 ¼", 71 ½", 71 ¾", 71 ⅝", 71 ⅞, 72", 72 ¼", 72 ½", 72 ¾", 72 ⅝", 72 ⅞, 73", 73 ¼", 73 ½", 73 ¾", 73 ⅝", 73 ⅞, 74", 74 ¼", 74 ½", 74 ¾", 74 ⅝", 74 ⅞, 75", 75 ¼", 75 ½", 75 ¾", 75 ⅝", 75 ⅞, 76", 76 ¼", 76 ½", 76 ¾", 76 ⅝", 76 ⅞, 77", 77 ¼", 77 ½", 77 ¾", 77 ⅝", 77 ⅞, 78", 78 ¼", 78 ½", 78 ¾", 78 ⅝", 78 ⅞, 79", 79 ¼", 79 ½", 79 ¾", 79 ⅝", 79 ⅞, 80", 80 ¼", 80 ½", 80 ¾", 80 ⅝", 80 ⅞, 81", 81 ¼", 81 ½", 81 ¾", 81 ⅝", 81 ⅞, 82", 82 ¼", 82 ½", 82 ¾", 82 ⅝", 82 ⅞, 83", 83 ¼", 83 ½", 83 ¾", 83 ⅝", 83 ⅞, 84", 84 ¼", 84 ½", 84 ¾", 84 ⅝", 84 ⅞, 85", 85 ¼", 85 ½", 85 ¾", 85 ⅝", 85 ⅞, 86", 86 ¼", 86 ½", 86 ¾", 86 ⅝", 86 ⅞, 87", 87 ¼", 87 ½", 87 ¾", 87 ⅝", 87 ⅞, 88", 88 ¼", 88 ½", 88 ¾", 88 ⅝", 88 ⅞, 89", 89 ¼", 89 ½", 89 ¾", 89 ⅝", 89 ⅞, 90", 90 ¼", 90 ½", 90 ¾", 90 ⅝", 90 ⅞, 91", 91 ¼", 91 ½", 91 ¾", 91 ⅝", 91 ⅞, 92", 92 ¼", 92 ½", 92 ¾", 92 ⅝", 92 ⅞, 93", 93 ¼", 93 ½", 93 ¾", 93 ⅝", 93 ⅞, 94", 94 ¼", 94 ½", 94 ¾", 94 ⅝", 94 ⅞, 95", 95 ¼", 95 ½", 95 ¾", 95 ⅝", 95 ⅞, 96", 96 ¼", 96 ½", 96 ¾", 96 ⅝", 96 ⅞, 97", 97 ¼", 97 ½", 97 ¾", 97 ⅝", 97 ⅞, 98", 98 ¼", 98 ½", 98 ¾", 98 ⅝", 98 ⅞, 99", 99 ¼", 99 ½", 99 ¾", 99 ⅝", 99 ⅞, 100", 100 ¼", 100 ½", 100 ¾", 100 ⅝", 100 ⅞, 101", 101 ¼", 101 ½", 101 ¾", 101 ⅝", 101 ⅞, 102", 102 ¼", 102 ½", 102 ¾", 102 ⅝", 102 ⅞, 103", 103 ¼", 103 ½", 103 ¾", 103 ⅝", 103 ⅞, 104", 104 ¼", 104 ½", 104 ¾", 104 ⅝", 104 ⅞, 105", 105 ¼", 105 ½", 105 ¾", 105 ⅝", 105 ⅞, 106", 106 ¼", 106 ½", 106 ¾", 106 ⅝", 106 ⅞, 107", 107 ¼", 107 ½", 107 ¾", 107 ⅝", 107 ⅞, 108", 108 ¼", 108 ½", 108 ¾", 108 ⅝", 108 ⅞, 109", 109 ¼", 109 ½", 109 ¾", 109 ⅝", 109 ⅞, 110", 110 ¼", 110 ½", 110 ¾", 110 ⅝", 110 ⅞, 111", 111 ¼", 111 ½", 111 ¾", 111 ⅝", 111 ⅞, 112", 112 ¼", 112 ½", 112 ¾", 112 ⅝", 112 ⅞, 113", 113 ¼", 113 ½", 113 ¾", 113 ⅝", 113 ⅞, 114", 114 ¼", 114 ½", 114 ¾", 114 ⅝", 114 ⅞, 115", 115 ¼", 115 ½", 115 ¾", 115 ⅝", 115 ⅞, 116", 116 ¼", 116 ½", 116 ¾", 116 ⅝", 116 ⅞, 117", 117 ¼", 117 ½", 117 ¾", 117 ⅝", 117 ⅞, 118", 118 ¼", 118 ½", 118 ¾", 118 ⅝", 118 ⅞, 119", 119 ¼", 119 ½", 119 ¾", 119 ⅝", 119 ⅞, 120", 120 ¼", 120 ½", 120 ¾", 120 ⅝", 120 ⅞, 121", 121 ¼", 121 ½", 121 ¾", 121 ⅝", 121 ⅞, 122", 122 ¼", 122 ½", 122 ¾", 122 ⅝", 122 ⅞, 123", 123 ¼", 123 ½", 123 ¾", 123 ⅝", 123 ⅞, 124", 124 ¼", 124 ½", 124 ¾", 124 ⅝", 124 ⅞, 125", 125 ¼", 125 ½", 125 ¾", 125 ⅝", 125 ⅞, 126", 126 ¼", 126 ½", 126 ¾", 126 ⅝", 126 ⅞, 127", 127 ¼", 127 ½", 127 ¾", 127 ⅝", 127 ⅞, 128", 128 ¼", 128 ½", 128 ¾", 128 ⅝", 128 ⅞, 129", 129 ¼", 129 ½", 129 ¾", 129 ⅝", 129 ⅞, 130", 130 ¼", 130 ½", 130 ¾", 130 ⅝", 130 ⅞, 131", 131 ¼", 131 ½", 131 ¾", 131 ⅝", 131 ⅞, 132", 132 ¼", 132 ½", 132 ¾", 132 ⅝", 132 ⅞, 133", 133 ¼", 133 ½", 133 ¾", 133 ⅝", 133 ⅞, 134", 134 ¼", 134 ½", 134 ¾", 134 ⅝", 134 ⅞, 135", 135 ¼", 135 ½", 135 ¾", 135 ⅝", 135 ⅞, 136", 136 ¼", 136 ½", 136 ¾", 136 ⅝", 136 ⅞, 137", 137 ¼", 137 ½", 137 ¾", 137 ⅝", 137 ⅞, 138", 138 ¼", 138 ½", 138 ¾", 138 ⅝", 138 ⅞, 139", 139 ¼", 139 ½", 139 ¾", 139 ⅝", 139 ⅞, 140", 140 ¼", 140 ½", 140 ¾", 140 ⅝", 140 ⅞, 141", 141 ¼", 141 ½", 141 ¾", 141 ⅝", 141 ⅞, 142", 142 ¼", 142 ½", 142 ¾", 142 ⅝", 142 ⅞, 143", 143 ¼", 143 ½", 143 ¾", 143 ⅝", 143 ⅞, 144", 144 ¼", 144 ½", 144 ¾", 144 ⅝", 144 ⅞, 145", 145 ¼", 145 ½", 145 ¾", 145 ⅝", 145 ⅞, 146", 146 ¼", 146 ½", 146 ¾", 146 ⅝", 146 ⅞, 147", 147 ¼", 147 ½", 147 ¾", 147 ⅝", 147 ⅞, 148", 148 ¼", 148 ½", 148 ¾", 148 ⅝", 148 ⅞, 149", 149 ¼", 149 ½", 149 ¾", 149 ⅝", 149 ⅞, 150", 150 ¼", 150 ½", 150 ¾", 150 ⅝", 150 ⅞, 151", 151 ¼", 151 ½", 151 ¾", 151 ⅝", 151 ⅞, 152", 152 ¼", 152 ½", 152 ¾", 152 ⅝", 152 ⅞, 153", 153 ¼", 153 ½", 153 ¾", 153 ⅝", 153 ⅞, 154", 154 ¼", 154 ½", 154 ¾", 154 ⅝", 154 ⅞, 155", 155 ¼", 155 ½", 155 ¾", 155 ⅝", 155 ⅞, 156", 156 ¼", 156 ½", 156 ¾", 156 ⅝", 156 ⅞, 157", 157 ¼", 157 ½", 157 ¾", 157 ⅝", 157 ⅞, 158", 158 ¼", 158 ½", 158 ¾", 158 ⅝", 158 ⅞, 159", 159 ¼", 159 ½", 159 ¾", 159 ⅝", 159 ⅞, 160", 160 ¼", 160 ½", 160 ¾", 160 ⅝", 160 ⅞, 161", 161 ¼", 161 ½", 161 ¾", 161 ⅝", 161 ⅞, 162", 162 ¼", 162 ½", 162 ¾", 162 ⅝", 162 ⅞, 163", 163 ¼", 163 ½", 163 ¾", 163 ⅝", 163 ⅞, 164", 164 ¼", 164 ½", 164 ¾", 164 ⅝", 164 ⅞, 165", 165 ¼", 165 ½", 165 ¾", 165 ⅝", 165 ⅞, 166", 166 ¼", 166 ½", 166 ¾", 166 ⅝", 166 ⅞, 167", 167 ¼", 167 ½", 167 ¾", 167 ⅝", 167 ⅞, 168", 168 ¼", 168 ½", 168 ¾", 168 ⅝", 168 ⅞, 169", 169 ¼", 169 ½", 169 ¾", 169 ⅝", 169 ⅞, 170", 170 ¼", 170 ½", 170 ¾", 170 ⅝", 170 ⅞, 171", 171 ¼", 171 ½", 171 ¾", 171 ⅝", 171 ⅞, 172", 172 ¼", 172 ½", 172 ¾", 172 ⅝", 172 ⅞, 173", 173 ¼", 173 ½", 173 ¾", 173 ⅝", 173 ⅞, 174", 174 ¼", 174 ½", 174 ¾", 174 ⅝", 174 ⅞, 175", 175 ¼", 175 ½", 175 ¾", 175 ⅝", 175 ⅞, 176", 176 ¼", 176 ½", 176 ¾", 176 ⅝", 176 ⅞, 177", 177 ¼", 177 ½", 177 ¾", 177 ⅝", 177 ⅞, 178", 178 ¼", 178 ½", 178 ¾", 178 ⅝", 178 ⅞, 179", 179 ¼", 179 ½", 179 ¾", 179 ⅝", 179 ⅞, 180", 180 ¼", 180 ½", 180 ¾", 180 ⅝", 180 ⅞, 181", 181 ¼", 181 ½", 181 ¾", 181 ⅝", 181 ⅞, 182", 182 ¼", 182 ½", 182 ¾", 182 ⅝", 182 ⅞, 183", 183 ¼", 183 ½", 183 ¾", 183 ⅝", 183 ⅞, 184", 184 ¼", 184 ½", 184 ¾", 184 ⅝", 184 ⅞, 185", 185 ¼", 185 ½", 185 ¾", 185 ⅝", 185 ⅞, 186", 186 ¼", 186 ½", 186 ¾", 186 ⅝", 186 ⅞, 187", 187 ¼", 187 ½", 187 ¾", 187 ⅝", 187 ⅞, 188", 188 ¼", 188 ½", 188 ¾", 188 ⅝", 188 ⅞, 189", 189 ¼", 189 ½", 189 ¾", 189 ⅝", 189 ⅞, 190", 190 ¼", 190 ½", 190 ¾", 190 ⅝", 190 ⅞, 191", 191 ¼", 191 ½", 191 ¾", 191 ⅝", 191 ⅞, 192", 192 ¼", 192 ½", 192 ¾", 192 ⅝", 192 ⅞, 193", 193 ¼", 193 ½", 193 ¾", 193 ⅝", 193 ⅞, 194", 194 ¼", 194 ½", 194 ¾", 194 ⅝", 194 ⅞, 195", 195 ¼", 195 ½", 195 ¾", 195 ⅝", 195 ⅞, 196", 196 ¼", 196 ½", 196 ¾", 196 ⅝", 196 ⅞, 197", 197 ¼", 197 ½", 197 ¾", 197 ⅝", 197 ⅞, 198", 198 ¼", 198 ½", 198 ¾", 198 ⅝", 198 ⅞, 199", 199 ¼", 199 ½", 199 ¾", 199 ⅝", 199 ⅞, 200", 200 ¼", 200 ½", 200 ¾", 200 ⅝", 200 ⅞

39  
PIECE



THREADLOCKER 242  
ON PAGE 143

G3418737 10 mL  
G3027315 50 mL



**MARSON HP-2 Deluxe Riveting Tool**

Rivet tool sets ⅜", ½", ⅝" and ¾" rivets from one side of work. Die-cast aluminum alloy construction with rubber composition grips. Includes interchangeable nosepieces. ▶ RIVETS AVAILABLE ONLINE

Rivet Tool  
G2249274 **\$19.60**

Replacement Jaw Kit  
G1961102 **\$5.12**



**VALUE BRAND Rivet Nut Kit**

Rivet nuts eliminate the need for tapping, welding or brazing. Kit contains plier-style setting tool and assorted sizes of nut inserts in a molded plastic case. Ideal for installation in metal or rigid material that is at least ⅜" thick.


**G1968364** 52-piece kit **\$99.99**  
kit includes: setting tool, nut mandrel, ¼-20 (16), #8-32 (12), #10-24 (12), #10-32 (12)

52  
PIECE



**VALUE BRAND Rivet Nuts**

Flanged knurled rivet nuts provide an efficient, cost-effective method of placing permanent, captive threads in thin materials. Nuts have more torque strength than standard rivet nuts, 360° knurled expansion after setting, and vibration resistance. Large flanged head allows increased push-out strength and extends above the material to provide built-in spacer. ▶ MORE ONLINE



**MARSON Heavy-Duty Setting Tool**

Lever-style tool features long handles and an easy-turn unit. Designed to set ¼-20, ⅜-18, ⅝-16, 6mm, 8mm and 10mm rivet nuts and nut inserts. Includes ¼-20 mandrel and nosepiece, service wrench and small rule.

Setting Tool  
G2805397 **\$137.64**

Steel Metric Mandrel and Nosepiece Set  
G2771054 4-piece set **\$47.49**  
set includes: M5, M6, M8, M10

Steel Mandrel and Nosepiece Set  
G0650964 5-piece set **\$40.94**  
set includes: 10-24, 10-32, ¼-20, ⅜-18, ⅝-16



**Steel**

Z#	thread	length	grip range	drill size	hole size	head height	body diameter	flange diameter	qty	price
G3466924	10-24	0.482"	0.020" to 0.13"	⅜"	0.295"	0.040"	0.295"	0.413"	100	<b>\$14.47</b>
G1724064	¼-20	0.590"	0.027" to 0.165"	⅝"	0.391"	0.060"	0.390"	0.500"	50	<b>\$9.67</b>
G1275014	⅝-16	0.685"	0.027" to 0.150"	⅜"	0.531"	0.070"	0.530"	0.685"	25	<b>\$12.21</b>
G0912852	⅝-16	0.808"	0.150" to 0.312"	⅜"	0.530"	0.070"	0.530"	0.685"	20	<b>\$10.09</b>
G0605981	⅜-18	0.688"	0.027" to 0.150"	⅜"	0.531"	0.060"	0.530"	0.685"	25	<b>\$10.85</b>

**Aluminum**

Z#	thread	length	grip range	drill size	hole size	head height	body diameter	flange diameter	qty	price
G0559081	10-24	0.594"	0.130" to 0.225"	⅜"	0.296"	0.037"	0.295"	0.417"	50	<b>\$9.49</b>
G3175121	¼-20	0.580"	0.027" to 0.165"	⅝"	0.390"	0.040"	0.390"	0.500"	50	<b>\$9.56</b>



**RAMSET Single-Shot Powder-Actuated Gun**

Powder-actuated tools are ideal for fast, secure fastening into steel, concrete and masonry. Trigger-operated single-shot gun is ergonomically designed for operator comfort and safety. Positive barrel and load retention prevents barrel from opening freely, allowing easy horizontal and overhead fastening. Funnel-shaped handle provides a large target to protect hands. Sling powder load ejection. Requires a 1lb hammer. Steel construction. For use with 2½" and 3" pins, with or without washer. 0.22 caliber loads. 14¾" tool length.

G1904506 **\$72.69**

**RAMSET Fastener Pins**

Fastener pins are ideal for fastening hard concrete to hard steel. 1060-1065 steel with core hardness of 52-56 Rc. 0.3" head diameter. 0.145" shank diameter. **► MORE ONLINE**

**Fastener Pins**

G1335214 2½" length 100-pack **\$4.90**  
 G3323975 3" length 100-pack **\$4.45**

**Fastener Pins with Washer**

G1326884 2½" length 100-pack **\$7.92**  
 G0618527 3" length 100-pack **\$13.34**



**VALUE BRAND Drywall Screws**

Drywall screws attach drywall or wallboard to metal or wood studs and joists without the need for predrilling. Thread-cutting screws feature a thin shank, deep threads, and a very sharp point. With a #2 phillips driver, the countersunk bugle head won't tear the surface paper of the drywall. Steel construction with black phosphate finish. **► MORE ONLINE**

G2228642 #6 x 1" 352-pack **\$4.04**  
 G2800804 #6 x 1½" 221-pack **\$2.99**  
 G3454823 #6 x 2" 191-pack **\$3.49**  
 G3215843 #8 x 2½" 112-pack **\$3.10**  
 G0918294 #8 x 3" 102-pack **\$3.49**  
 G1179647 #8 x 3" 510-pack **\$12.99**

**VALUE BRAND Deck Screws**

The coarse thread and type 17 point make it easier to assemble wood and vinyl decks or any outdoor wood-to-wood project. Countersunk flat head produces a flat surface area. Steel construction with 1,000 hour bronze ceramic finish. T25 star driver. Cross-cut thread. **► MORE ONLINE**



G2380567 #9 x 2¼" 117-pack **\$6.75**  
 G1873611 #9 x 3" 450-pack **\$28.96**  
 G0523582 #10 x 5" 221-pack **\$34.72**  
 G3225162 #10 x 6" 191-pack **\$36.82**

**STANLEY BOSTITCH Air Brad Nailer**

Oil-free, pneumatic 18-gauge brad nailer features tool-free access to drive channel, dry-fire lockout and quiet rear exhaust. Adjustable work contact element and drive depth. Selectable firing mode. Includes 2" brads (1,000), hex wrench, belt hook and carrying case. 70 to 120 psi. For use with ⅝" to 2½" fasteners. 110 capacity magazine. G0825842 **\$100.70**



**BOSTITCH Collated Wire Brads**

For use with pneumatic nailers, staplers and trackers. Chisel-point, 18-gauge steel construction with bright brown finish. Adhesive collation.

G3274677 ⅝" length 3,000-pack **\$6.74**  
 G2230426 ¾" length 3,000-pack **\$7.79**  
 G2543116 1" length 3,000-pack **\$7.17**



**STANLEY BOSTITCH Pneumatic Flooring Stapler**

Air stapler is used to install hardwood flooring without hammer marks. Includes rubber mallet. Aluminum housing. 0.070 cfm per shot. 92 capacity magazine. For use with 15½-gauge staples with ½" crown. 1½" to 2" leg length. 70 to 90 psi. ⅜" NPT inlet. 3⅝" w x 17¼" d x 14²⁄₃₂" h. G1049334 **\$501.48**

**STANLEY BOSTITCH Tool Repair Kit**


For use on pneumatic flooring stapler. Includes seals and O-rings. G0769736 **\$32.21**



**STANLEY BOSTITCH Collated Staples**

For use with pneumatic flooring stapler. Chisel-point, 15½-gauge steel construction with coated finish. Adhesive collation. ½" crown.

G1785551 1½" length 10,300-pack **\$69.25**  
 G0507841 1¾" length 9,000-pack **\$71.05**  
 G0728147 2" length 7,728-pack **\$73.63**



**PNEUMATIC STAPLERS ON PAGE 115**

G3380946 roofing  
 G3191185 construction

staples also available...





WHEN ONE DOOR CLOSES,  
ANOTHER ONE OPENS...

### YALE 1100 Series Door Closer

Standard-duty closer features a medium-size body and spring for effective door control. Rack and pinion closer has a lightweight aluminum alloy body and features adjustments for closing, sweep, latch, speed and backcheck. Adjustable to door sizes 1 to 4 (Grade 1) or fixed at door size 4 with backcheck (Grade 2). Includes adjustable back check valve, closing speed valve, latching speed valve and mounting hardware. Regular, top jamb and parallel arm installation. Non-handed door handling. Non-hold open closer. 180° opening. 9 $\frac{1}{16}$ "w x 2 $\frac{3}{8}$ "d x 1 $\frac{7}{8}$ "h housing with aluminum finish. ■ ANSI, UL STANDARDS  
G0154113 **\$119.99**



### NORTON Hydraulic Door Closers


Rack and pinion closers have a lightweight aluminum alloy body and feature adjustments for closing, sweep and latch speed and backcheck. Top frame mounting. Standard arm. Non-handed door handling. Non-hold open closer. 180° opening.  
■ ADA, ANSI, UL STANDARDS

#### 1600 Series

Standard-duty closer features a medium-size body and springs for effective door control. All moving parts are enclosed in the body. Adjustable spring size from 1 to 4. 9 $\frac{3}{4}$ "w x 2 $\frac{1}{2}$ "d x 2 $\frac{3}{8}$ "h housing with aluminum finish.  
G0035804 **\$113.29**

#### 7500 Series

Heavy-duty closer features larger closer body and springs, plus advanced hydraulic flow for greater door control. Adjustable spring size from 1 to 6. Includes backcheck positioning valve. 13 $\frac{3}{8}$ "w x 2 $\frac{1}{2}$ "d x 3 $\frac{1}{8}$ "h housing with aluminum finish.  
G0035201 **\$190.29**

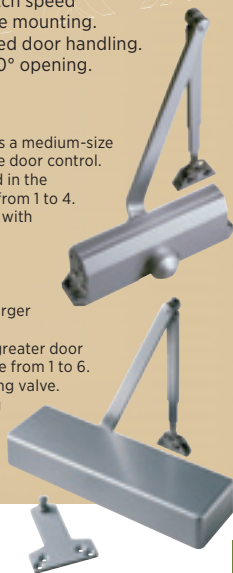

### YALE Rimlocks

Nonhanded, high-density rimlocks feature a rust-resistant alloy construction with a 1109E brass cylinder and 2 keys. Thumb-turn design. For use with 1 $\frac{3}{8}$ " to 2 $\frac{1}{4}$ " thick doors. 2 $\frac{3}{8}$ " backset.

#### Jimmyproof Deadbolt

Jimmyproof deadlock features two hardened steel interlocking bolts that resist prying. Shutter guard protects against forced entry even if outside cylinder is removed. Steel construction with bronze finish.  
G2377715 **\$44.37**

#### Heavy-Duty Deadbolt

Heavy-duty deadbolt features two hardened steel inserts. Steel construction with brass finish.  
G2932176 **\$28.72**



### VALUE BRAND Box Track


Sliding door box track tread keeps hangers aligned on rail. Galvanized steel. Hardware NOT included. 450lb capacity. 1 $\frac{3}{4}$ " width. 2 $\frac{1}{4}$ " height.

- G0960224 6' **\$14.57**
- G2335514 8' **\$26.58**
- G1374143 10' **\$41.20**
- G1861002 12' **\$50.64**



### VALUE BRAND Magnetic Door Plates

Door protection plates protect doors from scratches and dents caused by collisions from gurneys, carts, hand trucks or heavy equipment. Choose a plate 2" narrower than door. Aluminum construction with brass finish. 34" w x 0.031" d x 8" h. ► MORE FINISHES ONLINE  
G2122364 **\$32.14**

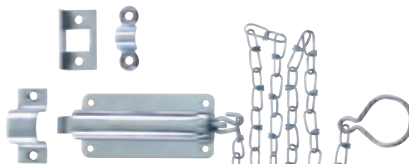

### VALUE BRAND Barrel Bolt

Spring-loaded chain bolt uses a strong hard-drawn wire spring that throws the bolt automatically when chain is released. Slide bolt features surface- and angle strike-operation. Includes 24" chain and hardware. Steel construction with zinc finish. 6 holes/leaf.  $\frac{3}{8}$ " x 3" bolt.  $\frac{1}{2}$ " throw size. 1 $\frac{1}{2}$ " w x 3" d x 1 $\frac{1}{8}$ " h.  
G0735095 **\$8.49**

### MASTER LOCK Corner Hasps

Fixed-staple corner hasps are ideal for applications with an inside or outside 90° corner. For use with shackles up to  $\frac{1}{2}$ " in diameter. Includes mounting hardware. Steel construction with zinc-plated finish. 1" w x 1 $\frac{1}{2}$ " d x 1" h.  
G1155971 2-pack **\$2.19**



### VALUE BRAND Bolt Hangers

Bolt hangers bolt through the top of metal- and wood-frame doors. 4-wheel rigid bracket features steel construction with bright zinc finish and nylon bearings. Includes hardware. 450lb capacity. 1 $\frac{7}{32}$ " w x 4 $\frac{5}{8}$ " d x 4" h.  
G1834445 **\$7.28**



### VALUE BRAND Strap Hangers

Strap hangers bolt to the face of solid wood doors. 4-wheel rigid bracket features steel construction with bright zinc finish and ball bearings. Includes hardware. 450lb capacity. 2 $\frac{3}{8}$ " w x 4 $\frac{5}{8}$ " d x 8 $\frac{3}{4}$ " h.  
G2637442 **\$16.94**

### VALUE BRAND Door Sweep

Nylon brush fibers fill gaps below doors and sweep dirt, insects and snow away from door. For inside or outside applications on residential and commercial doors. 3" w x  $\frac{1}{4}$ " d x  $\frac{3}{4}$ " h dark bronze aluminum flange with mounting holes.  $\frac{5}{8}$ " black insert. ► MORE ONLINE  
G1283554 **\$13.78**



### VALUE BRAND Door Silencers

Door frame silencers feature rubber construction and are for use with metal frames only.  $\frac{1}{2}$ " height.  
G1285487 10-pack **\$1.25**




### VALUE BRAND Bracket End Cap

End-cap bracket is for use with sliding door box rails. Galvanized steel. Hardware NOT included. 1 $\frac{3}{4}$ " w x 2 $\frac{1}{4}$ " d x 1 $\frac{1}{8}$ " h.  
G0363623 **\$2.01**



### VALUE BRAND Door Hanger Bracket Kit

Sliding door box rail hanger features steel construction with bright zinc finish and nylon bearings. For use with doors weighing up to 450 pounds.  
G3258071 kit **\$31.99**  
kit includes: door hangers (2), wall mount track brackets (4), end caps (2), hardware



### VALUE BRAND Magnetic Steel Door Weatherstripping Set

Door frame weatherstripping mounts on top and sides of door frame to seal gaps. Kerf insert conforms to irregular surfaces to create a tight seal. Installs in kerf-in door stop. For use with steel doors. TPR vinyl magnetic construction.  $\frac{5}{8}$ " flange height.  $\frac{1}{4}$ " flange thickness.  $\frac{1}{2}$ " brown insert.  
G1668186 3-piece set **\$16.88**  
set includes: 36" strip for top of door, 82" strip for latch side of door, 82" strip for hinge side of door



**VALUE BRAND Showcase Lock**

Features steel construction with chrome finish. Includes tightening thumb screw. 5½" length. ¼" width. 1" projection.

G2466107 *keyed different* **\$5.38**  
 G1142163 *keyed alike* **\$6.59**



**PHOENIX T-Latch Lock**

T-latch lock twists to latch and unlatch. For use with right-hand mounting applications. Stainless steel construction. Flush mount.

G4232575 **\$16.21**



**VALUE BRAND Drawer Slides**

Euro-style drawer slides are specially designed for use in home office, kitchen cabinet, commercial millwork and RTA furniture applications. Slides are self-closing, quiet and smooth. Single captive roller limits side play for improved lateral stability. Lift-out disconnect. 4-way adjustment slots. Positive lock-open position. Bottom mount. Steel construction with zinc-plated finish. Hardware NOT included.

¾" w x 10" d x ¾" h. ▶ **MORE ONLINE**  
 G1225673 2-pack **\$3.13**

**VALUE BRAND Pull Handle**

Folding pull handles with mounting plate features steel construction with polished zinc finish. Includes #6 x ¾" screws for mounting. ¼" grip diameter.

G1176603 **\$1.37**



**MASTER LOCK Door Bar Lock**

Telescoping sliding-door lock adjusts from 27½" to 42" to fit multiple door sizes. Steel construction with white powdercoat finish. Hardware included. 1½" width. 2½" height.

G3263224 **\$14.61**



**VALUE BRAND Door Wedge**

Gray rubber door wedge slides under door to hold it in an open position. 2¼" w x 6½" d x 1½" h.

G1716522 **\$2.61**



**VALUE BRAND Under-Shelf Hooks**

Hooks mount underneath shelf and feature steel construction with nickel finish. Includes hardware. 35 lb working load limit. 3" w x 3¾" d x 2½" h.


G3052822 2-pack **\$6.78**



**JOHN STERLING Shelf Brackets**

Heavy-duty shelf brackets feature steel construction. Hardware NOT included.


Q#	load	length	height	color	price
G0649783	125 lb	11¼"	7"	black	<b>\$1.79</b>
G3209552	500 lb	10½"	7½"	white	<b>\$5.41</b>



**VALUE BRAND Corner Braces**

Heavy-duty corner braces provide extra strength. Braces feature six mounting holes (2 per side). Steel construction with zinc finish.

G0303755 2" w x 2" d x ¾" h **\$0.59**  
 G1478215 4" w x 4" d x 1" h **\$1.88**

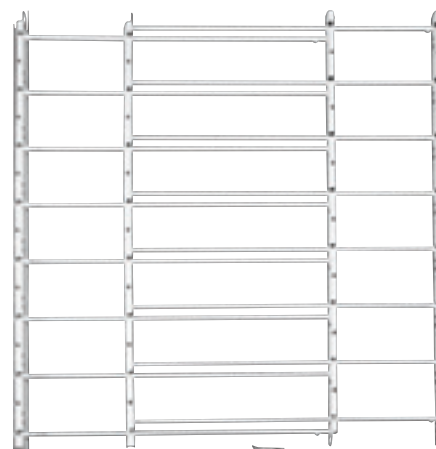

**JOHN STERLING Window Guard**

Window guards swing open for emergency exit. Length is adjustable from 24" to 42" for different size windows. Includes locking channel and mounting screws. Steel construction with white powder-coated finish. 1" width. 29½" height.

G1360204 **\$59.89**

**VALUE BRAND Vertical Blind Bracket**

Silver steel bracket is for use with vertical blinds. 3" length. 1½" width.

G1289486 **\$3.73**



**VALUE BRAND Valence Clip**

Clear valence clip is for use with vertical blinds. 3¾" length. 3½" width.

G1757122 **\$6.22**



**VALUE BRAND Magnetic Catch**

Low-profile magnetic catches mount where space is limited. For use on cabinets. Single strike plate closure. Steel construction with nickel finish. Surface mount—hardware included. 1½" x 1½" catch. ¾" x 1½" strike.

G2324962 **\$5.27**



**LAMP Grab Catch**

Catch jaws grab the strike to hold the door closed. Simply tug the door handle to open. Plastic rollers absorb shock and minimize closing noise. Spring closure. Black plastic construction. Surface mount—hardware NOT included. 2¾" x 2½" catch. 1½" strike length.

G2145595 **\$1.85**



**TOLCO Multi-Purpose Door Stop**

Built-in magnet allows for storage on metal surfaces. Unique design attaches to door knobs, broom handles, vacuums, service carts and trash cans. Thermoplastic elastomer construction. 2½" w x 4" d x 2¼" h.

G4245306 **\$7.34**



**VALUE BRAND Telescopic Support Brace**

Telescopic support braces provide extra support for leveling and stabilizing floor beams and joists during construction and repairs. Telescopic style with removable pins lets you properly position the brace for better leveling. End pad includes screw and turning bar for height adjustment. Welded steel construction with red oxide finish. 2588 lb to 11200 lb capacity. 54" to 150" service height.

▶ **MORE SIZES ONLINE**

G1049754 **\$94.87**





DOOR AND WINDOW SCREEN

NEW YORK WIRE

**Fiberglass Screen Rolls**

Flexible, easy-to-install screen withstands many climates including salt air. Commonly used for new construction. 18x16 medium mesh. 0.011" wire diameter. Charcoal finish.

- G4710395 24" x 100' **\$28.99**
- G4723144 30" x 100' **\$35.09**
- G4724666 36" x 100' **\$42.11**
- G4729383 48" x 100' **\$79.99**



NEW YORK WIRE

**Aluminum Screen Rolls**

Aluminum screen provides strong and durable protection against all types of insects. Aluminum construction is long-lasting, streak-free and easy to maintain. Corrosion resistant. 18 x 16 coarse mesh. Bright finish.

- G4730722 48" x 25' **\$33.98**
- G4711743 48" x 100' **\$92.85**


VALUE BRAND **Perforated Sheets**

Staggered hole designs are constructed of 22-gauge carbon steel with mill finish. Cold-rolled temper. 49,000 tensile strength. 36" x 40" sheet. 0.029" thickness. [▶ MORE ONLINE](#)



Round

5/32" hole diameter. 3/16" center spacing. 63% open area.  
G2024346 **\$26.59**

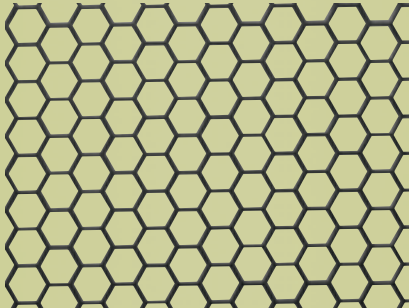

Hexagon

1/4" hole diameter. 5/32" center spacing. 79% open area.  
G1847921 **\$26.49**



LEXAN **Polycarbonate Sheet Stock**

Naturally transparent, crystal-clear sheets have excellent aesthetic properties, high impact strength and good formability. Used in security, injection molding and sheet/film applications—including lenses, compact discs, visors and instrument panels. 9,000 psi tensile strength.

[▶ MORE ONLINE](#)

- |                  |                  |                 |
|------------------|------------------|-----------------|
| <b>24" x 24"</b> |                  |                 |
| G1651675         | 0.060" thickness | <b>\$10.19</b>  |
| G1975041         | 0.093" thickness | <b>\$15.39</b>  |
| G0556491         | 0.375" thickness | <b>\$54.09</b>  |
| <b>24" x 48"</b> |                  |                 |
| G3211293         | 0.093" thickness | <b>\$28.29</b>  |
| G3382495         | 0.220" thickness | <b>\$57.89</b>  |
| G2599983         | 0.500" thickness | <b>\$149.19</b> |
| <b>48" x 48"</b> |                  |                 |
| G0641252         | 0.093" thickness | <b>\$59.31</b>  |
| G1942507         | 0.220" thickness | <b>\$115.69</b> |
| G2053861         | 0.236" thickness | <b>\$137.16</b> |

VALUE BRAND

**1100 Series Aluminum Foil Rolls**

Soft-tempered rolls are excellent for heat exchangers, fin stock, chemical equipment, metal stampings, transformers, moisture barriers, spinning and nameplates. Provides excellent corrosion resistance.

Easily welded and brazed, with thermal and electrical conductivity. Not heat treatable. Plain finish. 13,000 psi tensile strength.

■ B209 STANDARDS

**Heavy Gauge**

20" x 50'. 0.016" thickness.  
G1813926 **\$112.38**

**General Purpose**

18" x 500'. 0.002" thickness.  
G2171775 **\$142.43**




VALUE BRAND **6061 Aluminum Flat Stock**

Extruded temper aluminum provides strength and a high resistance to corrosion. Unpolished finish. 45,000 psi tensile strength.

■ ASTM, AMS STANDARDS

- |                   |                     |                |
|-------------------|---------------------|----------------|
| <b>3' Lengths</b> |                     |                |
| G1281192          | 4" (3/8" thickness) | <b>\$11.70</b> |
| G1785901          | 3" (1/2" thickness) | <b>\$31.59</b> |
| G2728625          | 2" (1" thickness)   | <b>\$42.12</b> |

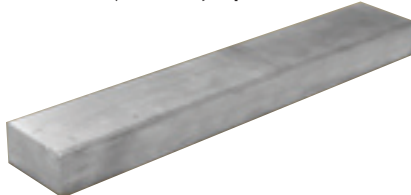

VALUE BRAND

**Food-Grade HDPE Sheet Stock**

Sheets are perfect for cutting boards and won't dull knives. Specially formulated acid-resistant surface doesn't absorb moisture, odor or bacteria. Resists chipping, peeling, cracking and warping. Dishwasher safe. Easy-to-weld material has good insulating properties, good electrical/dielectric properties and retains its toughness at low temperatures. Low steam permeability. 4,600 psi tensile strength. 2.4 lb impact strength. Off-white. ■ FDA, ASTM, USDA STANDARDS

[▶ MORE ONLINE](#)

- |                  |                |                |
|------------------|----------------|----------------|
| <b>24" x 48"</b> |                |                |
| G2973135         | 1/4" thickness | <b>\$25.05</b> |
| G1481715         | 1/2" thickness | <b>\$50.17</b> |




DYNAFORM **Rod Stock**

Isophthlic polymer resin (ISO) material is easily fabricated, compared to metal products. Ideal for constructing structural support systems—including platforms, walkways and equipment support. -100° to 150°F. 100,000 psi tensile strength. Natural. [▶ MORE ONLINE](#)

**5' Lengths**

- |          |               |                |
|----------|---------------|----------------|
| G2993532 | 1/4" diameter | <b>\$2.59</b>  |
| G2495464 | 3/8" diameter | <b>\$3.29</b>  |
| G0836945 | 1/2" diameter | <b>\$7.82</b>  |
| G1662245 | 3/4" diameter | <b>\$15.96</b> |



VALUE BRAND **Felt Strips**

Wool felt strips are great for dust shields, bumpers and pads. Strips provide excellent abrasion resistance and high vibration absorption. F3 grade. Plain backing. Gray. 400 psi tensile strength. 1/2" thickness.

- |                         |                         |
|-------------------------|-------------------------|
| <b>1 1/2" x 120"</b>    | <b>2" x 60"</b>         |
| G0458561 <b>\$14.92</b> | G1566896 <b>\$10.21</b> |



VALUE BRAND

**CR117 Cork Sheet Stock**


Fine-grain cork stock is ideal for bulletin board, coaster or gasket applications. Also used for silk screening and underpads. [▶ MORE ONLINE](#)

- |                  |                 |               |
|------------------|-----------------|---------------|
| <b>24" x 36"</b> |                 |               |
| G3365941         | 0.8mm thickness | <b>\$1.38</b> |
| G3176275         | 1.5mm thickness | <b>\$2.58</b> |
| G0261021         | 3.0mm thickness | <b>\$5.14</b> |



**VALUE BRAND Rubber Strips and Sheets**  
High-grade neoprene rubber provides excellent weather and abrasion resistance along with good flame and oil resistance. Black color with smooth finish and plain backing. 1,200 psi tensile strength. Durometer 30A. 450% elongation.  
■ ASTM STANDARDS ▶ MORE ONLINE

- 2" x 36" Rubber Strips**  
G3105943 1/16" thickness **\$1.99**  
G0466514 3/16" thickness **\$4.99**  
G0829202 1/4" thickness **\$6.79**
- 12" x 12" Rubber Sheets**  
G0838126 3/16" thickness **\$9.99**  
G0805795 3/8" thickness **\$16.32**
- 12" x 36" Rubber Sheets**  
G3420846 3/16" thickness **\$14.11**  
G1076047 3/8" thickness **\$19.99**  
G1094396 1/4" thickness **\$37.95**

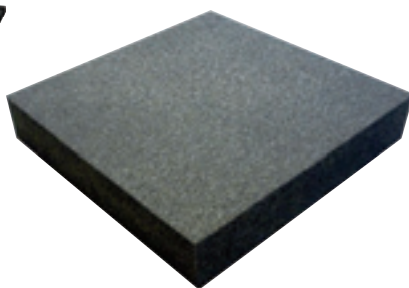

**VALUE BRAND 220 Polyethylene Foam Sheets**  
Polyethylene foam is a strong resilient closed-cell foam. Found in all types of packaging, polyethylene is used to wrap furniture, computer components, electronics, sporting goods, plants, frozen foods, clothing and much more. It can minimize static or maximize thermal insulation and is impervious to bacteria and mold. Coarse cell finish and plain backing. Charcoal. 9psi firmness (25% deflection). 32psi tensile strength. -20° to 150°F. ■ MILITARY STANDARDS

- 18" x 24"**  
G1612895 1/4" thickness **\$4.79**  
G0683681 1/2" thickness **\$8.46**
- 24" x 54"**  
G2030655 1/4" thickness **\$8.55**



**ADVANTECH Testing Sieves**  
Screens are constructed of woven stainless steel wire. Brass frames measure 8" in diameter and 2" deep.  
■ ASTM STANDARDS ▶ MORE ONLINE

**Fine Mesh**

#	mesh size	wire diameter	opening size	price
G3843375	#100	0.10mm	150µm	<b>\$42.99</b>

**Medium Mesh**

#	mesh size	wire diameter	opening size	price
G3843156	#18	0.56mm	1mm	<b>\$52.40</b>
G3843287	#20	0.50mm	850µm	<b>\$53.19</b>

**VALUE BRAND Rubber Sponge Rolls**

Closed-cell rubber sponge rolls are ideal for gasket, cushion and seal applications. Neoprene-EPDM-SBR construction with a textured finish and PSA tape backing. Durometer 30-50 (shore 00). 150% elongation. 50psi tensile strength. ■ ASTM STANDARDS



- 50' Rolls**  
G4337487 1" (3/4" thickness) **\$17.29**  
G4337496 2" (3/4" thickness) **\$34.49**  
G4337505 3" (3/4" thickness) **\$79.99**

**VALUE BRAND Rubber Cord Stock**  
Buna rubber cord stock is resistant to petroleum oils and gasoline. Round construction. Durometer 70. 1,450psi tensile strength. ■ ASTM STANDARDS

- 10' Length**  
G4336446 3/16" diameter **\$4.09**  
G4336455 3/8" diameter **\$5.19**
- 25' Length**  
G4336437 1/4" diameter **\$8.79**



**VALUE BRAND SBR Rubber Edging**  
Rubber edging can be pushed on to cover, seal and protect exposed edges against the effects of wind, water and dust. For use with a variety of materials including glass, metal, plastic, and wood. -25° to 230°F temperature range. Black SBR construction with non-adhesive backing. 100' length. ■ ASTM STANDARDS

#	style	groove	overall	price
G2513061	A	3/4" x 3/16"	3/8" x 3/8"	<b>\$47.99</b>
G1377905	B	3/2" x 3/32"	7/16" x 1/32"	<b>\$34.79</b>
G1685573	B	3/16" x 1 1/32"	7/32" x 1/16"	<b>\$56.29</b>
G0675902	C	3/8" x 3/4"	3/4" x 3/8"	<b>\$42.99</b>



**TRIM-LOK INC Edge Seal Grips**  
EPDM closed-cell sponge rubber bulb with vinyl grip is weather resistant. Easy-to-install—cut to length with shears or tin snips. Black non-marking material is ideal for indoor and outdoor use. -20° to 150°F. 25' length.

#	[A] fits edge	[B] leg length	[C] height	[D] dia bulb	price
G4069703	3/16"	1 1/32"	2 9/32"	3/8"	<b>\$34.99</b>
G4089967	1/16"	9/16"	1 1/16"	3/8"	<b>\$34.99</b>
G3932013	3/8"	9/16"	1 5/16"	3/8"	<b>\$34.99</b>
G4191993	3/32"	3/16"	1 3/16"	3/8"	<b>\$40.99</b>
G4111554	3/8"	9/16"	1 3/16"	3/8"	<b>\$40.99</b>

**TRIM-LOK INC Foam Rubber Seal**  
Water-resistant EPDM closed-cell sponge rubber seals are weather resistant. Designed to create an easy-to-close seal against dust, noise and vibration. Cut to length with scissors or knife. High-strength foam acrylic adhesive creates an airtight seal between the rubber and substrate and has low initial tack for easy repositioning. General-purpose pressure sensitive adhesive backing is ideal for light-duty applications.

- 5/8" x 3/8" D-shape**  
G4004454 100' length **\$45.09**
- 3/4" x 9/16" D-shape**  
G4163661 25' length **\$16.99**  
G4109472 250' length **\$148.19**



**VALUE BRAND Silicone Rubber Grommets**  
Rubber grommets protect against abrasion damage when wires, tubes, and other objects are inserted through holes in metal, plastic or other hard materials. Weather, heat and water resistant. Red color. 1,200psi tensile strength. Durometer 50. 5% elongation. ■ MILITARY, ASTM STANDARDS

#	MS AN 931	35489	[A] inner diameter	[B] outer diameter	[C] overall thickness	[D] panel thickness	[E] panel hole dia	qty	price
G0627532	A3-5	33	3/16"	7/16"	1/4"	3/16"	3/16"	25	<b>\$4.55</b>
G0622282	4-7	6	1/4"	5/8"	3/16"	3/16"	3/16"	10	<b>\$4.20</b>
G1209476	A6-10	40	3/8"	7/8"	3/8"	3/8"	3/8"	5	<b>\$5.75</b>
G0813251	B6-10	69	3/8"	7/8"	7/16"	3/16"	3/8"	5	<b>\$5.53</b>
G3104087	8-13	14X	1/2"	1 1/16"	3/16"	3/16"	1 1/16"	5	<b>\$6.39</b>







**SCOTCH Super 33+ Electrical Tape**

Premium-grade, flexible black vinyl tape resists weather, abrasion, alkalis, acids and corrosion. 600 V (max). 220°F (max). Flame retardant. UV resistant. 7 mil thickness.

- UL, CSA, RoHS, ASTM STANDARDS
- G2444477 3/4" x 66' each **\$4.09**
- G1286065 3/4" x 20' 10-pack **\$18.99**



**SCOTCH Super 88 Electrical Tape**

Flame-retardant vinyl tape resists cold temperatures, weather, moisture, alkalis, acids and corrosion. Heavy-duty tape provides quick buildup and abrasion resistance. 600 V(max). 220°F (max). UV resistant. 8.5 mil thickness.

- UL, CSA, RoHS, ASTM STANDARDS
- G3280383 **\$4.59**



**SCOTCH 35 Electrical Tapes**

Vinyl tape stretches to conform to virtually any shape and exhibits excellent mechanical and electrical insulation properties. Resists abrasion, corrosion, alkalis and acid. Provides superior all-weather protection. Great for color-coding applications. 600 V (max). 220°F (max). 7 mil thickness. 3/4" x 66' roll.

- UL, CSA, RoHS, ASTM STANDARDS
- G0154472 red                    G0154463 white
- G0154506 yellow           G0154497 green
- G0154481 blue              G0154515 orange
- each **\$3.79**

**SCOTCH 69 Glass Cloth Electrical Tape**

Silicone adhesive reinforces insulation in electrical installations where heavy loads can cause high heat and breakdown. Class "H" insulation. 600 V (max). 392°F (max). 7 mil thickness. 3/4" x 66' roll.

- UL, CSA, MILITARY, ASTM STANDARDS
- G1446453 **\$15.68**



**SCOTCH 27 Glass Cloth Electrical Tape**

Glass cloth tape provides heat-stable insulation for hot-spot applications such as motor leads and switches. Thermosetting rubber resin pressure-sensitive adhesive. Class "B" insulation. 600 V (max). 266°F (max). 7 mil thickness. 3/4" x 66' roll.

- UL, CSA, ASTM STANDARDS
- G1352425 **\$11.92**

**SCOTCH 130C Linerless Rubber Splicing Tape**

EPR-based splicing tape is for use as a primary electrical insulation for splicing all solid dielectric cables and for building stress cones on cables. Additional applications include jacketing on high-voltage splices and terminations, moisture-sealing electrical connections, bus bar insulations and end-sealing high-voltage cables. 69 kV (max). 266°F (max). 30 mil thickness.

- ASTM STANDARDS
- G3202805 **\$11.99**



**3M Scotch 2228 Rubber Mastic Tape**

Self-fusing moisture seal mastic conforms to irregular surfaces to insulate and seal in indoor and outdoor bus bar and splicing applications. Insulates, pads and seals high-voltage cables and accessories. Features self-healing characteristics and comes on an easy-release liner. 35 kV (max). 160 oz/in adhesion strength. 65 mil thickness.

- ASTM STANDARDS
- G0308646 **\$11.30**

**3M Scotch 23 Rubber Splicing Tape**

Highly conformable rubber splicing tape offers high- and low-voltage insulating qualities. Innovative snakeskin liner is easily removed as tape is applied. 69 kV maximum. 194°F (max). 30 mil thickness. 3/4" x 30' roll.

- ASTM STANDARDS
- G2330912 **\$13.47**



**VALUE BRAND Self-Fusing Tape**

Self-fusing silicone rubber protective overwrap is adhesive free. For use in insulating electrical connections, protecting pipe threads, friction wrap for handle grips, tension wrap for bundles of wires and hoses, temporary hose repairs and corrosion protection. Creates a permanent seal. 400 V (max). 392°F continuous use. 500°F intermittent use. 20 mil thickness.

- 1" x 36' roll.
- G2070634 **\$11.07**

**GORILLA GLUE Duct Tapes**  
Double-thick adhesive grips smooth, rough and uneven surfaces. Polyethylene over black cotton cloth with reinforced backing. 17 mil thickness. ■ UL STANDARDS

- G4393593 1" x 30' **\$3.60**
- G1866322 1 1/4" x 36' **\$4.99**
- G2523333 1 1/4" x 105' **\$10.99**
- G0329777 2 1/4" x 90' **\$11.49**



**INCOM MANUFACTURING Sail Patch Tape**

Excellent for repairing torn sails. Clear polyolefin with acrylic adhesive. 6 mil thickness. 3" x 5 yd roll.

G0876662 **\$12.06**



**NASHUA 394 Duct Tape**

Polyethylene coated cloth tape is for use in manufacturing, construction and HVAC industries on duct and equipment. Conforms well to irregular surfaces and is for all-purpose and general repair applications. 40° to 200°F. 9 mil thickness. 48mm x 55m roll. ■ UL STANDARDS

G2634432 **\$3.59**



**NASHUA 322 Aluminum Foil Tape with Liner**

General-repair foil tape is ideal for use on joints and seams to seal out moisture and vapor. Synthetic rubber adhesive. 40° to 200°F. 5 mil thickness. ■ UL STANDARDS

G1382832 48mm x 46m **\$9.44**  
G0902027 72mm x 46m **\$11.49**



**PARAFIL Laboratory Sealing Film**

Colorless, moisture-proof film molds to surface. Two-way stretch design can adhere to irregular shapes and surfaces to provide a secure seal.

G4312987 2" x 250' roll **\$22.99**  
G4455333 4" x 125' roll **\$18.99**  
G4455342 4" x 250' roll **\$35.99**

**TARTAN Masking Tape**

For light-duty bundling, attaching, labeling and general-purpose applications. Beige crepe paper structured with rough surface and rubber adhesive for clean removal. 4.4 mil thickness. 55m length.

G4308936 1/2" width **\$1.19**  
G4308972 3/4" width **\$1.37**  
G4308963 1" width **\$1.66**  
G4308954 1 1/2" width **\$3.29**  
G4308945 2" width **\$4.51**



**TAPECASE Intertape PT14 Painter's Masking Tape**


Blue fine-structured crepe backed painter's tape features a synthetic rubber backing. 5.5 mil thickness.

■ PSTC, ASTM STANDARDS  
G3902254 1/4" x 180' **\$2.19**  
G4242201 1/2" x 180' **\$2.42**  
G4040382 1 1/2" x 180' **\$7.27**



**ANTI-SEIZE PTFE Sealant Tapes**

Universal thread sealant can be used on all types of metal or plastic pipe connections and can effectively seal a vast array of chemicals. 10,000 psi (max). -400 to 550°F. ► MORE ONLINE




**Low Density**  
G0713361 1/2" x 520" **\$0.97**

**Poly-Temp Medium Density**  
G1132661 1/4" x 520" **\$0.97**  
G0426176 1/2" x 260" **\$1.29**  
G1610655 1/2" x 520" **\$1.49**



**Poly-Temp High Density**  
G2651555 3/4" x 520" **\$3.09**

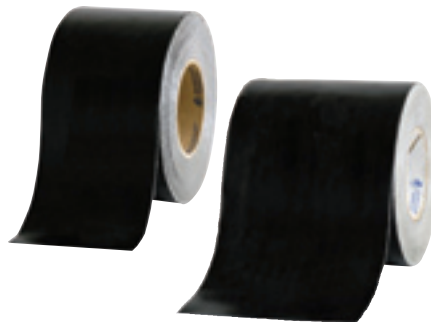

**ETERNABOND Roof Repair Tape**

Sealant tape is ideal for reseaming and resealing roofs by creating a permanent water-tight seal. For use on roof surfaces, gutters, skylights, flashing, coping and tubings—adheres to all materials except silicone. Will not dry or harden. UV stable. 1-hour functional cure. 35 mil thickness. ■ UL STANDARDS

G1430843 4" x 50' (16.6 sq-ft) **\$64.39**  
G2069365 6" x 50' (25 sq-ft) **\$78.59**

**SCOTCH Double-Sided Foam Tape**

Open-cell foam is designed for indoor use. Ideal for mounting items such as soap dispensers and air fresheners, signage and kickplates. Offers excellent shear strength, good temperature resistance and vibration damping characteristics. Acrylic adhesive. 0 to 220°F. 62 mil thickness. 3/4" x 108' roll. ✓ RoHS COMPLIANT

G4309076 **\$39.48**

**VELCRO Reclosable Fastener Tape**

Velcro brand rubber adhesive features a strong water-resistant closure. Strips of stiff hooks and pliable loops engage to form quick-fastening attachment. High-temperature, high-strength, pressure-sensitive, long-lasting nylon with acrylic adhesive. 1" x 25 yd roll.

G3428031 hook  
G1143265 loop  
each **\$28.97**





MORE THAN 400,000 ITEMS ONLINE

YOU KNOW YOU'VE ALWAYS WANTED TO TRY IT.  
YOUR FRIEND SWEARS BY IT. NOW IS YOUR BIG CHANCE! MAKE  
ALL OF YOUR CO-WORKERS JEALOUS WHEN YOU SHOW  
OFF YOUR FRESH NEW BOTTLE OF GORILLA GLUE!

**GORILLA GLUE All-Purpose Glue**

Damp it. Glue it. Clamp it. Gorilla Glue offers extremely strong bonding power. It is waterproof and bonds wood, stone, metal, ceramic and more. Brown color. 10 to 15 min application time. 1 to 2 hr clamp time. 24 hr full cure.

- G0912441 4 oz **\$7.46**
- G2617711 8 oz **\$12.99**
- G0329585 18 oz **\$16.99**
- G2389441 36 oz **\$28.39**



**DAP Silicone Rubber Sealant**

100% silicone rubber sealant provides excellent flexibility and adhesion for a weathertight seal. Adheres to glass, ceramic, fiberglass, wood, brick, metal, drywall, tile and concrete. Indoor/outdoor use. 20 min application time. 24 hr functional cure. 10.1oz cartridge.

■ ASTM STANDARDS

- G0015032 clear
  - G0015023 black
  - G0015014 almond
  - G0015041 white
  - G0015005 aluminum
  - G0015057 bronze
- each **\$3.89**

**PRO-SEAL RTV Silicone**

High-temp instant gasket features a low-solvent formula that releases significantly fewer harmful vapors than standard adhesives. Replaces gaskets, seals and dressings. For rigid or flexible flanges. Sensor safe. 24 hr full cure. 15 min application time. Includes nozzle. Red.

- G2726263 3oz tube **\$1.69**
- G1444983 11.1oz cartridge **\$6.48**



**DAP Alex Painter's Caulk**

Painter's acrylic latex caulk is a durable product formulated to last 25 years. Paintable with latex and oil-based paints. Can be used for both interior and exterior applications. Adheres to wood, metal, drywall and brick. 10 min application time. 24 hr functional cure. 10.1oz cartridge. White acrylic latex.

- G1557893 **\$1.32**



**GE Silicone I Window and Door Sealant**

Specialty caulk and sealant withstands all weather conditions and will remain permanently waterproof, flexible, shrinkproof and crackproof. Adheres to most wood, metal, vinyl siding, drywall, plaster, glass and plastic. Use caulk on doors, siding, trim, molding, baseboards and vents. Also use around wire, pipes and other attic/basement applications. 30 min application time. 24 hr functional cure. 9.8 oz cartridge.

■ ASTM STANDARDS  
✓ PRODUCT CONTRIBUTES TO REDUCING ENERGY CONSUMPTION

- G0003464 white
  - G0003455 clear
- each **\$3.99**



**MOMENTIVE RTV100 Series Industrial Silicone Sealant**

Highly-flexible silicone-based gasket sealant has excellent fluid resistance and high-temperature resistance. For use on rigid or flexible flanges. Easy-to-apply sealant sets up quickly with a high-performance, acetoxo cure. 30 min application time. 24 hr full cure. 10.1oz cartridge. Clear.

- G2066102 **\$7.99**



**GE Contractors SCS100 Silicone Sealant**

Indoor/outdoor sealant is UV and weather resistant. Adheres without primer to glass, metal, wood and many plastics. 30 min application time. 24 hr functional cure. 10.1oz cartridge. Clear.

- ASTM, FEDERAL, FDA STANDARDS
- G0003771 **\$4.89**



**DAP Kwik Foam Polyurethane Insulating Foam**

One-component foam sealant is moisture curing and expands to fill and seal large cavities. Stops air infiltration without shrinking or degrading. Formula is flame-retardant, waterproof and dries hard. 2-3:1 expansion ratio. Tan.

- G1826867 12 oz **\$4.75**
- G0324956 24 oz **\$10.79**



**NEWBORN Caulk Gun**

Industrial super ratchet rod caulk gun is zinc-chromate plated. For use with 10.3oz cartridges. Includes puncture tool.

- G1214884 **\$9.99**

**GE Silicone II Window and Door Sealant**

Specialty caulk and sealant is water-ready in only three hours. 100% Silicone formula is waterproof, flexible, shrinkproof and crackproof. Sealant stretches and compresses with joint movement as house moves and settles. Adheres to glass, metal, plastic, fiberglass, granite, concrete and wood. Remains permanently flexible and does not harden over time. Non-corrosive. 30 min application time. 24 hr functional cure. 9.8 oz cartridge.

■ ASTM STANDARDS  
✓ PRODUCT CONTRIBUTES TO REDUCING ENERGY CONSUMPTION

- G0003482 clear **\$5.19**



**DEVCON Repair Putty Kits**

11lb kits include resin and hardener. 16hr functional cure.

**Plastic Steel**

Cures to a tough, durable metallic mass at room temperature. Can be drilled, tapped, machined or painted. For maintenance, production and looting operations. Works with most metals, concrete and some plastics. 45min work life. 2,800psi shear strength. 250°F (max). Dark grey.

G2114576 **\$35.76**



**Stainless Steel**

Non-rusting compound bonds to both ferrous and non-ferrous materials. Acceptable for use in meat and poultry plants. 58 min work life. 2,385psi shear strength. 250°F (max). Grey.

G2412584 **\$62.75**

**Titanium**

Titanium-reinforced epoxy makes quick, precisely machinable repairs. Chemical resistant. 21min work life. 2,000psi shear strength. 350°F (max). Grey.

■ OSHA STANDARDS  
G1887864 **\$92.64**



**DEVCON Flexane 80 Liquid**

Castable, non-shrinking medium viscosity urethane will not change shape while curing.

11lb kit includes resin and hardener. 16hr functional cure. 30min work life. 2100psi tensile strength. 180°F (max). Black.

G1048756 **\$47.40**

**3M Super 77 Spray Adhesive**

Multipurpose spray adhesive is a high-tack, high-coverage, fast-drying, translucent adhesive. For use in furniture, construction and decorative applications. Permanently attaches foils, carpeting, lightweight foam, paper, plastics, cardboard, felt and cloth to metal, wood, hardboard and other base materials. 16.75oz net weight. ■ FEDERAL STANDARDS  
VOC LEVELS MEET SCAQMD REQUIREMENTS

G0841057 **\$14.04**



**SUPER GLUE Instant Adhesive**

Forms strong bonds in tight joints between clean breaks or smooth surfaces. Best used with non-porous application parts. For use on aluminum, ceramic, china, metal, most plastics, pottery, rubber and wood. Creates an instant bond and sets in seconds. 2g tube.

G2688086 12-pack **\$4.86**

**LOCTITE**

**Super Bonder 495**

General-purpose cyanoacrylate instant adhesive is designed to bond rubber, metal, and plastic parts with gaps to 0.004".

G1859681 3g **\$2.69**  
G2792343 1oz **\$14.39**



**LOCTITE Threadlocker 242**

Designed to be applied to threaded components before assembly. Use to fill gaps between threads and securely mate surfaces to form solid, unitized assemblies. Prevents fasteners from loosening due to vibration and protects against rust and corrosion. Medium-strength formula is removable with hand tools. For use on ¼" to ¾" locking nuts and bolts. 5 min fixture time. 24hr full cure. Blue.

G3418737 10mL **\$10.18**  
G3027315 50mL **\$28.32**



**LOCTITE Sealants**

Use primer to increase cure speed or to ensure proper cure on inactive metals. 50mL tube. White.

**General Purpose 565 Pipe Sealant**

Seal medium to coarse straight and tapered pipe threads and fittings. Controlled lubricity prevents galling and protects mated threaded areas from rust and corrosion. -65 to 300°F. ■ AGA, UL, NSF STANDARDS

G3401763 **\$13.98**

**High Temperature 567 Thread Sealant**

Instantly seal all sizes of metal threaded pipe. Protects against chemicals. -65 to 400°F. ■ NSF, ANSI STANDARDS

G0925041 **\$13.99**



**J-B WELD**

**Cold-Weld Epoxy Adhesive**

When fully cured, cold-weld epoxies can be drilled, sanded, filled, tapped, machined and painted. Heavy-duty bonding in automotive, home, industrial, farm and marine applications. Bonds virtually any clean, dry surface—wood, metal, tile, ceramic, jewelry, glass and plastic. Petroleum-, chemical- and acid-resistant. Includes 1oz resin and 1oz hardener for a 1:1 mixing ratio. 1 to 2hr work life. Up to 24hr full cure. 3,960psi shear strength. Gray.

G0364253 **\$3.13**



**3M Polygun Electronic Control Applicator**

This versatile applicator can be used for a wide range of jobs. For use with "Q" and "LMQ" adhesive— 5/8" x 8" glue stick capacity. Delivers up to 5.5lb of jet-melt adhesive per hour. 350W. 120V. 260 to 450°F.

G0943932 **\$423.13**



**3M LMQ Hot Melt Adhesive**

High-performance adhesive provides fast and strong bonds to a wide variety of materials. For use on paper, rigid beadboard and flexible grid urethane foam. Remains Flexible. For use with EC Applicator.

G1717581 amber (0° to 130°F) 165-pack **\$124.85**  
G2812643 clear (0° to 140°F) 165-pack **\$159.99**



**DEVCON 2-Ton Epoxy Cartridges**

Water-resistant, non-shrinking formula bonds with ferrous and nonferrous metals, ceramics, wood, concrete or glass in any combination. 1:1 mixing ratio. 12min work life. 16hr full cure. 2,250psi shear strength. Clear.

G0586582 25mL Dev-Tube **\$5.66**  
G1737111 50mL cartridge **\$10.29**



**3M EPX Applicator and Nozzle**

Light-weight and portable device mixes, dispenses and meters epoxy.

**EPX Plus II Applicator**

1:1 and 2:1 ratio plunger for use with 50mL Duo-Pak cartridges. Includes plungers (2).

G1111686 **\$62.99**

**EPX Mixing Nozzle**

Stepped-tip nozzle for 10:1 mixing ratio.

G3420803 12-pack **\$24.25**



**3M Scotch-Weld DP100+**

High-shear, fast-cure epoxy bonds aluminum, steel, wood, glass, ABS, PVC, polycarbonate, acrylic and fiberglass. 4 min application time. 48hr full cure. 3,500psi shear strength. 50mL Duo-Pak cartridge.

G1011683 **\$16.23**





MORE THAN 400,000 ITEMS ONLINE



**COMFOREL Pillow**  
White 100% cotton T230 ticking with piped edges and cluster fiber fill provide both comfort and support.

The hypo-allergenic and antimicrobial protection inhibits a variety of odor causing molds, bacterias and funguses. Pillow is machine washable.

G0964765 *standard* **\$15.32**  
G2592012 *queen* **\$19.99**  
G3085564 *king* **\$24.50**

**HONEY-CAN-DO Clothespin Bag**

Hanging cloth bag holds up to 200 standard clothespins.

G4563483 **\$3.59**



**HONEY-CAN-DO Clothespins**

Heavy-gauge wire springs withstand repeated use. Each clip holds up to 10 pounds.

**Wood**  
G1103286 100-pack **\$3.39**



**Assorted Plastic**  
G1871091 100-pack **\$5.99**

**HONEY-CAN-DO Over-the-Door Hanger Holder**

Hanger helps create custom solutions for a well-kept closet. Metal with chrome and black finish.

G4568085 **\$6.74**



**HONEY-CAN-DO Wood Hanger**

Solid hardwood hangers feature an open swivel hook and nonslip pant bar. 17" width. Cherry finish.

G0189734 24-pack **\$24.28**

**R & R TEXTILE Flour Sack Towel**

White towel is 100% cotton. 28" x 29".

G1317197 12-pack **\$20.90**



**HOTEL BASICS Pool Towel**

Striped pool towels are 100% cotton and feature an open-end style with cam border and hemmed edges. 20" x 40".

▶ **MORE ONLINE**  
G3130416 12-pack **\$22.24**



**THERMOS Beverage Can Insulator**

Beverage can insulator is constructed of stainless steel with a rubber grip. Holds one 12 oz can.

G4390206 **\$13.70**

**RUBBERMAID Mixing Pitcher**

Beverage pitcher features an integrated stirrer. Pitcher has a 3-way lid—closed, open and slotted. Commercial dishwasher safe. Translucent polyethylene. 2 qt. ■ NSF STANDARDS

G3041866 **\$9.50**



**RUBBERMAID Beverage Pitcher**

Pitcher has a 3-way lid—closed, open and slotted. Solid periwinkle polyethylene. 2¼ qt.

G3226797 **\$5.72**



**BUNN Coffee Filters**

Paper filters are for use with most 10- and 12-cup coffee makers. 9¾" basket style.

G0879654 1,000-pack **\$11.14**

**TABLECRAFT PRODUCTS COMPANY Bar Caddy**

Caddy is constructed of black ABS plastic. 5¾" w x 9½" d x 4" h.


G1933425 **\$4.99**



**TABLECRAFT PRODUCTS COMPANY Bar Mat**

Bar mat is constructed of black thermoplastic rubber. Nonslip mat has a molded-in pattern for drainage and is commercial dishwasher safe. 12" w x 18" d x ¾" h.

G0904337 **\$8.13**



**VALUE BRAND Protective Leg Tips**

Nonskid cushioned rubber tips fit over 1" round tubular metal or wood furniture legs. For use with straight or angled legs.

▶ **MORE SIZES AND COLORS ONLINE**  
G3393975 24-pack **\$8.99**



**VALUE BRAND Rubber Furniture Pads**

Self-stick pads protect surfaces from scratches and marring. For use on tables, chairs, desks and computer equipment. Ethylene vinyl acetate. 7/32" height.

G4033172 1" diameter 16-pack **\$1.02**  
G4284944 1½" diameter 8-pack **\$1.02**



**GENEVA Quartz Clock**

Analog wall clock features plastic construction with a shatterproof lens. Requires AA battery (1)—NOT included. 14" diameter.

G2861756 **\$15.89**



**BRIGHTSTAR Universal TV Remote**

Universal TV remote control is programmable for most TV brands. Ideal for use in the hospitality and healthcare industries—guests cannot change settings.

G0270882 **\$4.90**



**GEORGIA PACIFIC EasyNap Tabletop Napkin Dispenser**

Tabletop dispenser holds up to 250 napkins. Unit loads in either direction to eliminate misfeeding. Black plastic construction with merchandising window. 5¾" w x 4¾" d x 7¼" h.

G3516904 **\$1.30**

**GEORGIA PACIFIC EasyNap Tower Napkin Dispenser**

Tower dispenser holds up to 1000, 1-ply napkins. Counter-stand tower can be wall or base mounted. Black plastic. 8¼" w x 8¼" d x 28½" h.

G3547941 **\$7.64**



**GEORGIA PACIFIC EasyNap Napkins**

Unique fold design allows more napkins per dispenser. 1-ply with embossed pattern. 6½" x 9¾" brown sheets—6½" x 5" folded. 250 napkins/pack.

▶ **100% TOTAL RECYCLED CONTENT**  
G3544037 24-pack **\$53.99**



**VALUE BRAND Folding Chair**

Unpadded folding chair is constructed of steel. Beige. 18½" w x 20" d x 30¼" h.

▶ **MINIMUM 70% POST-CONSUMER RECYCLED CONTENT**  
G2197946 **\$12.99**



**VALUE BRAND Bulletin Board**  
Natural cork bulletin board features a silver aluminum frame. For indoor use only. Includes mounting hardware. 48" x 36".

G0639956 **\$26.54**

**VALUE BRAND Push Pins**

Assorted push pins are constructed of transparent plastic and metal. 3/4" length.

G1648306 100-pack **\$1.35**



**GAI-TRONICS Industrial Telephone Enclosure**

Weatherproof enclosure is made of glass-reinforced polyester and resists most corrosives. Hinged door offers a positive seal when door is closed and latched. Includes a #630A mounting plate that accommodates most standard wall telephones. NEMA 4X rating.

G3076272 **\$155.99**



**SAUNDERS 3-Ring Binders**

Plain cover 3-ring binders are made from antimicrobial recycled aluminum and feature an O-ring binding. For use with 8 1/2" x 11" sheets. **MINIMUM 50% POST-CONSUMER RECYCLED CONTENT**

G2728643 1" rings **\$18.47**  
G2748961 2" rings **\$19.99**



**VALUE BRAND Dry Erase Board**

Glossy melamine dry erase board features a silver aluminum frame with tray. Includes mounting hardware. 48" x 36".

G2977764 **\$32.30**



**QUARTET Laser Pointer**

Pen-style laser pointer is made of high-impact plastic and projects a red dot up to 655' away. Class 3A. Includes AAA batteries (2). 6 1/2" length.

G2401402 **\$13.99**



**ZEBRA PEN Refillable Ballpoint Pen**

Pen features stainless steel construction with a nonslip grip. Fine-point black ink cartridge.

▶ REFILLS ONLINE

G3441261 **\$1.89**



compact design

**VALUE BRAND Clipboards**

Clipboards feature plastic construction and a low profile clip with a 1/2" capacity. 8 7/8" x 12 3/8" clipboard holds 8 1/2" x 11" sheets.


G3015266 black  
G0275527 green  
G2953763 red  
G1069652 blue  
each **\$2.49**



**MMF INDUSTRIES Coin Tray**

Plastic coin organizer with five sorting sections is designed to hold pennies, nickels, dimes, quarters and half-dollars. Markings in each section provide at-a-glance coin totals for easy counting. 6 1/4" w x 3 5/8" d x 1 7/8" h.

G1242087 **\$4.86**



**MMF INDUSTRIES Rolled Coin Tray Set**

Plastic storage trays are color coded and hold \$5 in pennies, \$20 in nickels, \$50 in dimes and \$100 in quarters. 11 1/2" w x 4" d x 4 1/2" h.

G0275301 4-piece set **\$20.55**  
set includes: trays (penny, nickel, dime, quarter)



**SAUNDERS Storage Clipboard**

Portable storage clipboard features a calculator and wire spring clip with a 1/2" capacity. Plastic board opens at the bottom and features a 1" storage capacity to hold paper, pens, etc. 10" x 16 1/8" clipboard holds 8 1/2" x 11" sheets.

G3061624 **\$8.89**



**SKILCRAFT Power Duster**

Aerosol dust remover is recommended for use on electronics and office equipment. Includes extension tube. 16 oz can. 10 oz net weight.

■ VOC STANDARDS  
G1262475 **\$6.18**



**VALUE BRAND Step Stool**

Plastic step stool is easily portable and supports up to a 350 lb load. 15 3/4" diameter upper platform. 13 1/2" height.

G0157525 **\$49.19**



**COSCO Window Paint Markers**

Brightly colored window paint markers work on non-porous surfaces including glass windows, mirrors and white boards. Broad-tipped markers are rain resistant. ■ ASTM STANDARDS

▶ MORE COLORS ONLINE

G1279065 green  
G2855745 yellow  
each **\$4.99**  
G0852941 purple  
G1326053 white



**GARVEY Ticket Dispenser**  
Queue system ticket dispenser is constructed of red plastic and holds a single roll of tickets. Mountable to the wall or metal stand—mounting hardware included.

G1910851 **\$21.38**

**GARVEY Ticket Roll**  
Queue system ticket roll features 100 white, tickets with service numbers 0 to 99.

G2857531 22-pack **\$9.69**

**GARVEY Ticket Dispenser Stand**  
Stand features metal construction with powder-coated finish, a weighted base and a customer service number sign. 5' height.

G3325436 **\$145.98**





**FP INTERNATIONAL Packing Peanut Dispenser**

Dispenser includes spring loaded scissor valve and installation kit complete with hardware, rope and pulleys (2). 30 cu-ft capacity. 39" w x 39" d x 51" h.

► **MORE SIZES ONLINE**

G3176144 **\$287.98**



**FP INTERNATIONAL Packing Peanuts**

Loose-fill recycled polystyrene peanuts are reusable and static-free. Will not chip or dust. Biodegradable. 7.5 cu-ft.

100% TOTAL RECYCLED CONTENT

G1805912 **\$15.99**



**START INTERNATIONAL Tape Dispensers**

Multi-roll tape dispenser has the capacity to dispense four rolls of tape. Tiered metal bars help guide and separate tape rolls. Steel and plastic construction. Includes 3" cores. 4" width.

G4057523 **\$27.22**



**MARSH Stencil Ink**

Spray stencil ink dries instantly on most surfaces—won't smear, ripple or smudge. Inks are waterproof and weather-resistant. 11 oz aerosol.

G2770957 *black* **\$4.99**

G2723235 *white* **\$4.29**

**VALUE BRAND Polyethylene Tubing**

Tubing can be cut to length for flexibility and heat sealed, stapled, tied or taped closed. 100% virgin low-density polyethylene material is treated on one side to accept printing. 3" core. 2 mil thickness. 2,150' length.

► **FDA STANDARDS**  
► **MORE SIZES ONLINE**

G0367762 2" width **\$29.64**  
G3001704 3" width **\$43.27**  
G3455803 4" width **\$51.04**  
G1828041 5" width **\$63.89**



**DYMO Office-Mate II Manual Label Maker**

Embossing label maker produces 3/16" high characters. Dispenser accepts 3/8" or 1/2" wide tape. Includes forward and reverse tape control, horizontal character wheel and a 3/8" x 12' black vinyl adhesive tape roll. Vinyl construction.

G3440105 **\$25.92**



**VALUE BRAND Kraft Paper**

Kraft wrapping paper is a versatile, economical packaging material great for use as void fill to protect items during shipping. It is also ideal for covering boxes, books, etc. 30 lb basis weight. 1,200' roll.

100% RECYCLED AND RECYCLABLE

G1540935 12" **\$15.79**  
G2877262 18" **\$15.99**  
G1857651 24" **\$21.99**  
G2397543 30" **\$26.99**  
G2379736 36" **\$31.99**  
G1144132 48" **\$44.99**



**MIDWEST PACIFIC Polyethylene Tubing Rack**

Rack holds multiple rolls of tubing. Steel construction. 12" width.

G2653551 **\$16.98**



**DYMO Label Tape Rolls**

Adhesive labels are designed for indoor or outdoor applications. Vinyl. 3/8" x 12' rolls.

G0155757 *red*  
G0155766 *blue*  
G0155775 *black*  
each **\$1.69**



**VALUE BRAND Wire Tags**

Blank manila paper tags include a 12" wire and fiber-reinforced patch to prevent ripping. 3 3/8" x 6 1/4".

► **MORE ONLINE**  
G1624761 1,000-pack **\$38.52**



**ZIPPER-SEAL BAGS**

Reclosable zipper-seal bags feature a wide opening for easy sealing and resealing. Secure seal helps eliminate spills or contamination. Bags meet FDA requirements for food applications.

**VALUE BRAND Reclosable Bags**

Clear polyethylene is 2 mil thick.

► **FDA STANDARDS**

100-Pack  
G1444064 2" x 3" **\$0.98**  
G2670884 3" x 4" **\$1.15**  
G2027891 3" x 5" **\$1.29**

100-Pack Dispenser Box  
G3301977 4" x 3" **\$1.29**  
G3324614 5" x 3" **\$1.69**  
G1007176 6" x 4" **\$2.19**  
G1147431 9" x 6" **\$3.99**  
G3155451 12" x 9" **\$7.39**  
G0304385 15" x 12" **\$10.99**



**VALUE BRAND Write-On Reclosable Bags**

Clear polyethylene is 4 mil thick and features a white write-on block.

► **FDA STANDARDS**

100-Pack Dispenser Box  
G0597021 3" x 5" **\$2.87**  
G0807143 4" x 6" **\$4.07**  
G0449032 6" x 9" **\$8.38**



**VALUE BRAND Heat Sealers**

Hand-operated sealers create watertight, airtight seals on flat and gusseted poly bags or poly tubing. 115 VAC. 1/16" x 16" seal. 6 mil thickness (max).

► **MORE ONLINE**  
G4020597 **\$157.21**





**INTERNATIONAL PAPER Corrugated Boxes**  
Corrugated moving/Storage boxes come in various shapes and sizes to fit a variety of goods. 200lb test. **MUST BE ORDERED IN MULTIPLES LISTED BELOW FOR SAFE SHIPPING** ▶ **MORE SIZES ONLINE**

Q#	length	width	depth	qty	price
G3779745	16"	12½"	12½"	20	<b>\$1.42EA</b>
G3778652	18"	18"	16"	15	<b>\$1.99EA</b>
G0649372	24"	18"	18"	1	<b>\$2.86EA</b>

**MOVING EQUIPMENT**


All pads and covers feature one-piece linear batting and finished corners to cushion items and protect from dust and dirt.

**VALUE BRAND Door Jamb Protector Pad**  
Door jamb protector features three springs to hold cover in place. Woven. 2.5lb. 24" x 69".  
G2129197 **\$19.45**




**VALUE BRAND Quilted Pad**

Nonwoven pads have single-lock zigzag stitching. 72" x 80". 3lb.  
▶ **MORE ONLINE**  
G3423743 **\$7.91**



**VALUE BRAND Quilted Pad**

Woven pad has double-lock zigzag stitching to keep pads from unraveling. 78" x 100". 7.5lb. ▶ **MORE ONLINE**  
G0664316 **\$19.79**



**VALUE BRAND Chair Cover**

Chair cover features hook-and-loop fasteners to hold in place. Woven. 39" width. 44" height. 8.6lb.  
G0666513 **\$29.74**



**VALUE BRAND Refrigerator Cover**

Appliance cover features hook-and-loop fasteners to hold in place. 33" width. 68" height. 12.5lb.  
G0814432 **\$55.04**



**VALUE BRAND Palette Band Set**

Rubber construction. 6¼" width. ¾" height.  
G3351677 6-piece set **\$7.84**  
set includes: 29" (2), 36" (2), 45" (2)



**PELOUZE Digital Shipping and Receiving Scale**

Perfect for warehouse use, check weighing, large crates and shipping freight up to 400 pounds. Stainless steel construction. Includes AC adapter. 12½" w x 12" d x 2¼" h.  
G3077855 **\$147.99**

**TAYLOR TE Series Shipping and Receiving Scale**

Specifically designed for use in shipping and receiving areas where durability and economy are essential. The 6' coiled cord allows control panel with 1" LCD readout to remain on bench or wall while weighing platform safely remains on the floor. Steel treadplate platform. 400lb capacity. Includes AC adapter. 12" w x 12¼" d x 2½" h.  
G2700537 **\$123.84**




**VALUE BRAND Hand Stretch Wrap**

Narrow width hand stretch wrap with disposable built-in dispenser comes ready to use. Clear cast stretch wrap is constructed of linear low-density polyethylene.



G3947176	3" x 1,000' (80 gauge)	<b>\$3.19</b>
G3975176	3" x 700' (120 gauge)	<b>\$3.69</b>
G4316295	3" x 600' (150 gauge)	<b>\$3.79</b>
G3952347	5" x 1,000' (80 gauge)	<b>\$3.79</b>
G4066352	5" x 700' (120 gauge)	<b>\$4.49</b>
G4223125	5" x 600' (150 gauge)	<b>\$4.99</b>



**VALUE BRAND Stretch Wrap**

Ready-to-use disposable system features hand brake on dispenser to protect the user's hands from friction heat buildup. 80-gauge clear cast stretch wrap is constructed of polyethylene.

G4079205	15" x 1,000'	<b>\$11.46</b>
G3988284	20" x 1,000'	<b>\$13.99</b>

**VALUE BRAND Stretch Wrap**

Multilayer film technology offers greater strength, while maintaining high clarity. 80-gauge clear cast stretch wrap is constructed of linear low-density polyethylene. 18" x 1500' roll. 3" core.

G4290237 **\$15.19**



**SCOTCH 311 Box Sealing Tape**

Tapes are made of polypropylene film with acrylic adhesive and have a 3" core. 25lb/in tensile strength. 22oz/in adhesion strength. 2.05mil thickness. 48mm width. ■ **ASTM STANDARDS**



G4533961	50m	<b>\$1.59</b>
G4580536	100m	<b>\$2.59</b>

**SEAL SAFE Tape Gun**

Heavy-duty tape dispenser for use with 2" self-adhesive tapes. Steel construction with non-skid base.

G4608651 **\$21.99**



**SIGNODE Steel Strapping Combo Tool**

Sealless combination tool can be used to tension, crimp and cut steel strapping. Tensions two ends of strapping, then interlocks and crimps them to create a seal. Also used for retensioning loose straps. For use on flat surfaces.

G2521172 for ½" strapping  
G2228405 for ¾" strapping  
each **\$1699.99**



**SIGNODE Steel Strapping**

Strong, cold-rolled steel strapping is painted and waxed to improve tension around loads. 0.017" thickness. ■ **ASTM STANDARDS**

▶ **MORE SIZES ONLINE**



**Ribbon Wound (RW)**  
G2877052 ½" x 300' (1,275 lb strength) **\$38.27**  
G3354601 ¾" x 300' (1,900 lb strength) **\$40.69**

**Mill Wound (MW)**  
G3209236 ½" x 3,635' (1,275 lb strength) **\$172.49**

**HIGHLIGHT Hi-Tech Handwrapper**

This stretch wrap dispenser's unique control delivers higher stretch levels for tight, secure and economical loads. Comfortable foam handle with 33° angle makes it easy to wrap any load. Sturdy zinc die-cast construction. Adjusts to accept 12" to 18" film widths. 3" core.

G2860952 **\$58.90**



**PAC STRAPPING PRODUCTS**

**Plastic Strapping Kit**  
Black 18mil polypropylene strapping is for use in light-duty applications. Kit contents are packaged in a self-dispensing carton. 300lb break strength.


G0979045 kit **\$45.13**  
kit includes: ½" x 3,000' strapping, one-handed tensioner, wire buckles (300)



**SIGNODE Strapping Seals**

Steel strapping seals are placed over the overlapping strap ends during or after tensioning the strapping—no prethreading required. Open-type seals are for flat surfaces. Painted steel. Double-notch joint.

G2702551 ½" 200-pack **\$10.59**  
G0484233 ¾" 200-pack **\$8.79**








ZORO  
909 ASBURY DRIVE  
BUFFALO GROVE, IL 60089

PRESORT STD  
U.S. POSTAGE  
PAID  
Zoro Tools, Inc.

 **FREE** UPS GROUND SHIPPING  
on orders of \$50 or more\*

\*For more details visit [www.zorotools.com/shipping/](http://www.zorotools.com/shipping/)

 CALL TOLL FREE

**855.BUY.ZORO (855.289.9676)**

monday thru friday 7 am to 7 pm (CST)





SE HABLA ESPAÑOL

© 2014 Zoro Tools, Inc.



# ODDS & ENDS

The only thing these items really have in common is how awesome they are. We have such a wide variety of products that no single reasonably-sized catalog can contain them. See these items and more online at [zoro.com](http://zoro.com).

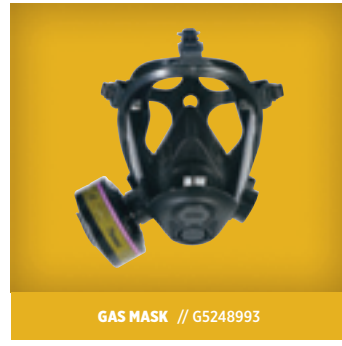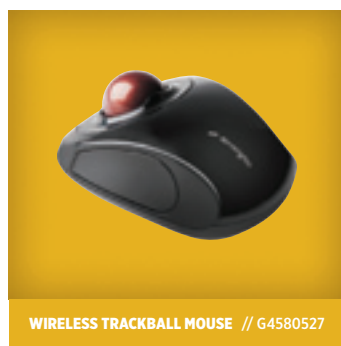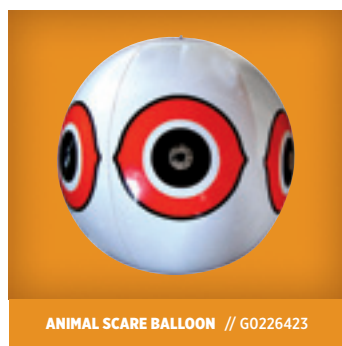

[www.zoro.com](http://www.zoro.com) » MORE THAN 400,000 UNIQUE ITEMS ONLINE